



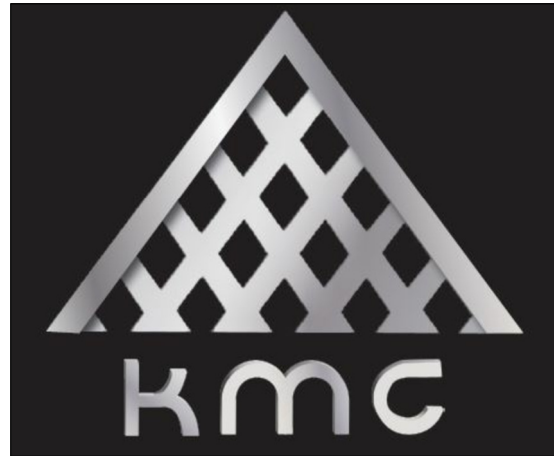

# KMC ALUMINIUM LTD.

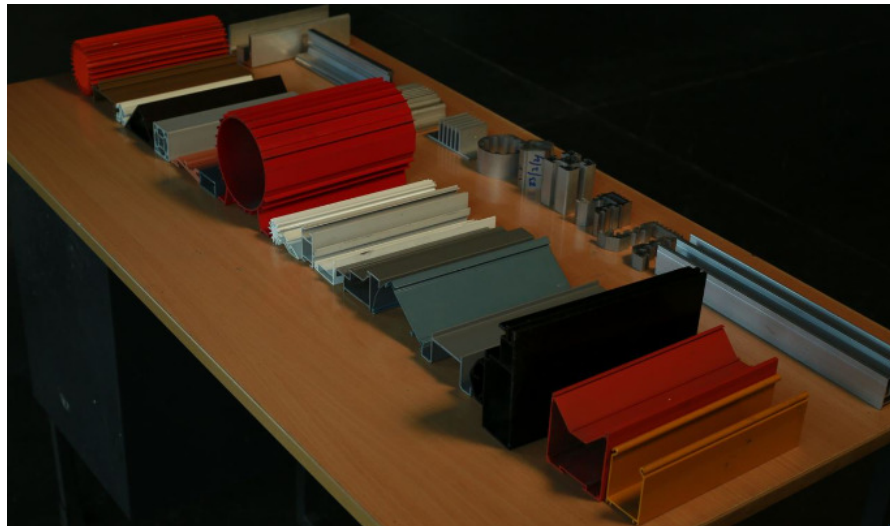

## GENERAL INFORMATION

**WROUGHT ALLOYS: CHEMICAL COMPOSITION LIMITS (PERCENT)**

| USA AA | ISS OLD | ISS NEW | Cu   |      | Mg   |      | Si   |      | Mn   |      | Fe MAX. | OTHER MAX. | REMARKS                                 |
|--------|---------|---------|------|------|------|------|------|------|------|------|---------|------------|-----------------------------------------|
|        |         |         | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |         |            |                                         |
| 1050   | IB      | 19500   |      | 0.05 |      |      |      | 0.3  |      | 0.05 | 0.4     | 0.1        | AL. 99.5% MIN.                          |
| 1070   |         | 19700   |      | 0.03 |      |      |      | 0.2  |      | 0.03 | 0.25    | 0.1        | AL. 99.7% MIN.                          |
| 1080   | IA      | 19800   |      | 0.03 |      |      |      | 0.15 |      | 0.03 | 0.15    | 0.1        | AL. 99.8% MIN.                          |
| 1100   | IC      | 19000   |      | 0.10 |      |      | 0.2  | 0.5  |      | 0.1  | 0.7     | 0.2        | AL. 99.0% MIN.                          |
| 2011   |         |         | 5.0  | 6.0  |      |      | 0.1  | 0.4  |      | 0.1  | 0.7     | 0.4        | ALSO LEAD & BISMUTH<br>0.2 - 0.6 % EACH |
| 2014   | H15     | 24345   | 3.8  | 4.8  |      | 0.2  | 0.8  | 0.5  | 1.2  | 0.3  | 0.7     | 05         |                                         |
| 2017   | H14     | 24534   | 3.5  | 4.7  |      | 0.4  | 1.2  | 0.2  | 0.7  | 0.4  | 0.7     | 0.5        |                                         |
| 3103   | N3      | 31000   |      | 0.1  |      |      | 0.1  |      | 0.6  | 0.8  | 0.7     | 0.4        |                                         |
| 5052   | N4      | 52000   |      | 0.1  |      | 1.7  | 2.6  |      | 0.6  |      | 0.5     | 0.4        |                                         |
| 5086   | N5      | 53000   |      | 0.1  |      | 2.8  | 4.0  |      | 0.6  |      | 0.5     | 0.4        |                                         |
| 6261   |         | 65032   |      | 0.15 |      | 0.7  | 1.2  | 0.4  | 0.8  |      | 0.7     |            |                                         |
| 6061   | H20     | 65028   |      | 0.15 |      | 0.7  | 1.2  | 0.4  | 0.8  | 0.2  | 0.7     |            |                                         |
| 6063   | H9      | 63400   |      | 0.1  |      | 0.4  | 0.9  | 0.3  | 0.7  |      | 0.6     | 0.4        |                                         |
| 6066   | H11     | 64423   | 0.7  | 1.2  |      | 0.8  | 1.4  | 0.9  | 1.8  | 0.6  | 0.7     | 0.4        |                                         |
| 6101   | 91E     | 63401   |      | 0.1  |      | 0.35 | 0.8  | 0.3  | 0.7  |      | 0.5     | 0.1        |                                         |
| 6201   |         | 64401   |      | 0.1  |      | 0.6  | 0.9  | 0.5  | 0.9  |      | 0.5     | 0.1        |                                         |
| 6351   | H30     | 64430   |      | 0.1  |      | 0.4  | 1.2  | 0.6  | 1.3  | 0.4  | 0.6     | 0.4        |                                         |
| 6005   |         | 62400   |      | 0.1  |      | 0.4  | 0.6  | 0.6  | 0.9  |      | 0.35    |            |                                         |
| 6060   |         | 63400   |      | 0.1  |      | 0.35 | 0.6  | 0.3  | 0.6  |      | 0.3     |            |                                         |

Cu - COPPER  
Mg - MAGNESIUM  
Si - SILICON  
Mn - MANGANESE  
Fe - IRON



| GENERAL INFORMATION                   |         |         |        |        |       |                                      |                                    |
|---------------------------------------|---------|---------|--------|--------|-------|--------------------------------------|------------------------------------|
| WROUGHT ALLOYS: MECHANICAL PROPERTIES |         |         |        |        |       |                                      |                                    |
| NON HEAT TREATABLE ALLOYS             |         |         |        |        |       |                                      |                                    |
| USA AA                                | ISS OLD | ISS NEW | TEMPER | TEMPER |       | 0.2% PROOF STRESS kg/mm <sup>2</sup> | ELONGATION G.L. FOR Ø12.5 mm ROUND |
|                                       |         |         |        | MIN.   | MAX.  |                                      |                                    |
| 1050                                  | IB      | 19500   | 0      | 6.5    | 9.50  | ---                                  | 30                                 |
| 1070                                  | ---     | 19700   | 0      | ---    | 9.50  | ---                                  | 23                                 |
| 1080                                  | IA      | 19800   | 0      | ---    | 9.00  | ---                                  | 35                                 |
| 1100                                  | IC      | 19000   | 0      | 6.5    | 11.00 | ---                                  | 18                                 |
| 3103                                  | N3      | 31000   | 0      | 9      | 13.0  | ---                                  | 24                                 |
| 5005                                  |         | 51000A  | 0      | 10     | 15.00 | ---                                  | 20                                 |
| 5052                                  | N4      | 52000A  | 0      | 17     | 22.00 | 6.00                                 | 14                                 |
| 5086                                  | N5      | 53000   | 0      | 20.5   | 27.50 | 10.00                                | 14                                 |

| HEAT TREATABLE ALLOYS |         |         |          |        |      |                                      |                                    |
|-----------------------|---------|---------|----------|--------|------|--------------------------------------|------------------------------------|
| USA AA                | ISS OLD | ISS NEW | TEMPER   | TEMPER |      | 0.2% PROOF STRESS kg/mm <sup>2</sup> | ELONGATION G.L. FOR Ø12.5 mm ROUND |
|                       |         |         |          | MIN.   | MAX. |                                      |                                    |
| 6063                  | H9      | 63400   | T4(W)    | 11     | ---  | 8.0                                  | 13                                 |
| 6063                  | H9      | 63400   | T6(WP)   | 19.0   | ---  | 15.5                                 | 7                                  |
| 6061                  | H20     | 65028   | M (or) O | 11.0   | 17.5 | ---                                  | 12                                 |
| 6061                  | H20     | 65028   | T4(W)    | 19     | ---  | 11.0                                 | 15                                 |
| 6061                  | H20     | 65028   | T6(WP)   | 28.5   | ---  | 23.5                                 | 7                                  |
| 6261                  | H20     | 65032   | M (or) O | 11.0   | 17.5 | ---                                  | 12                                 |
| 6261                  | H20     | 65032   | T4(W)    | 19     | ---  | 11.0                                 | 15                                 |
| 6261                  | H20     | 65032   | T6(WP)   | 28.5   | ---  | 23.5                                 | 7                                  |
| 6351                  | H30     | 64430   | M (or) O | 11     | 17.5 | ---                                  | 16                                 |
| 6351                  | H30     | 64430   | T4(W)    | 19.0   | ---  | 11.0                                 | 14                                 |
| 6351                  | H30     | 64430   | T6(WP)   | 30.0   | ---  | 25.0                                 | 7                                  |
| 6066                  | H11     | 64423   | O        | ---    | 20.5 | ---                                  | 16                                 |
| 6066                  | H11     | 64423   | T4(W)    | 28.0   | ---  | 17.5                                 | 14                                 |
| 6066                  | H11     | 64423   | T6(WP)   | 35.0   | ---  | 31.5                                 | 7                                  |
| 6101                  | 91E     | 63401   | T4(W)    | 15.0   | ---  | 6.5                                  | 14                                 |
| 6101                  | 91E     | 63401   | T6(WP)   | 20.0   | ---  | 17.0                                 | 8                                  |
| 6201                  | ---     | 64401   | T4(W)    | 16.0   | ---  | 7.0                                  | 14                                 |
| 6201                  | ---     | 64401   | T81(WDP) | 32.0   | ---  | ---                                  | 3                                  |

| TEMPER AND DESIGNATION |       |                                                                          |
|------------------------|-------|--------------------------------------------------------------------------|
| INDIA (or) U.K.        | U.S.A | DESCRIPTION                                                              |
| 0                      | O     | ANNEALED                                                                 |
| M                      | F     | AS FABRICATED AS MANUFACTURE (or) AS CAST                                |
| W                      | T4    | SOLUTION HEAT - TREATED NATURALLY AGED AND AMENABLE TO ARTIFICIAL AGEING |
| P                      | T5    | ARTIFICIALLY AGED (or) PRECIPITATION HEAT - TREATED                      |
| WP                     | T6    | SOLUTION HEAT - TREATED AND PRECIPITATION HEAT - TREATED                 |

BS 1474:1987

TABLE 6

| DIAMETER, WIDTH (OR) WIDTH ACROSS FLAT |                         | TOLERANCES<br>±mm |
|----------------------------------------|-------------------------|-------------------|
| OVER (mm)                              | UPTO AND INCLUDING (mm) |                   |
| ---                                    | 3                       | 0.16              |
| 3                                      | 10                      | 0.20              |
| 10                                     | 18                      | 0.26              |
| 18                                     | 30                      | 0.32              |
| 30                                     | 40                      | 0.40              |
| 40                                     | 60                      | 0.45              |
| 60                                     | 80                      | 0.50              |
| 80                                     | 100                     | 0.65              |
| 100                                    | 120                     | 0.80              |
| 120                                    | 140                     | 0.90              |
| 140                                    | 160                     | 1.0               |
| 160                                    | 180                     | 1.1               |
| 180                                    | 200                     | 1.2               |
| 200                                    | 240                     | 1.3               |
| 240                                    | 280                     | 1.5               |
| 280                                    | 320                     | 1.7               |



# KMC ALUMINIUM

## INDEX

| S.NO. | PROFILE CATEGORY                             |
|-------|----------------------------------------------|
| 01    | ROUND PIPE                                   |
| 02    | ROUND ROD                                    |
| 03    | SQUARE TUBE                                  |
| 04    | SQUARE BAR                                   |
| 05    | HEXAGON BAR                                  |
| 06    | RECTANGULAR TUBE                             |
| 06A   | RECTANGULAR TUBE WITH FULL RADIUS            |
| 07    | FLAT BAR                                     |
| 07A   | FLAT BAR WITH CORNER RADIUS                  |
| 08    | RADIUS FLAT BAR                              |
| 09    | EQUAL ANGLE                                  |
| 10    | UNEQUAL ANGLE                                |
| 11    | SINGLE CHANNEL (OR) U - CHANNEL              |
| 12    | FLUTED TUBE & RECTANGULAR TUBE WITH C.RADIUS |
| 13    | GENERAL                                      |
| 14    | AC GRILL                                     |
| 15    | ARCHITECTURAL                                |
| 16    | AUTOMOBILE                                   |
| 17    | HVAC,AHU & THERMAL BREAK                     |
| 18    | LADDER                                       |
| 19    | MESH                                         |
| 20    | MODULAR                                      |
| 21    | MOTOR BODY                                   |
| 22    | OEM                                          |
| 23    | POWER                                        |
| 24    | RAILWAY                                      |
| 25    | TRANSPORT                                    |
| 26    | ELEVATOR                                     |
| 27    | COMMON PROFILES                              |
| 28    | SOLAR                                        |

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ROUND PIPE

PAGE 01 - I



D - OUTER DIAMETER  
T - THICKNESS

| SEC NO  | D     | T    | WT/RANGE/12'  |
|---------|-------|------|---------------|
| 1606    | 5.60  | 1.20 | 0.145 - 0.180 |
| 1605    | 6.30  | 1.10 | 0.160 - 0.190 |
| K6868   | 7.00  | 1.00 | 0.168 - 0.206 |
| 1607    | 7.50  | 0.65 | 0.120 - 0.150 |
| 1608    | 7.90  | 0.90 | 0.175 - 0.210 |
| K7661   | 8.00  | 1.00 | 0.0059 kg/m   |
| 1610    | 9.00  | 0.65 | 0.150 - 0.185 |
| 1609    | 9.40  | 0.70 | 0.170 - 0.200 |
| K6999   | 11.90 | 1.00 | 0.093 kg/m    |
| K6998   | 12.3  | 0.90 | 0.078 - 0.096 |
| 1613    | 12.7  | 0.90 | 0.290 - 0.370 |
| 1613/A  | 12.7  | 1.20 | 0.385 - 0.462 |
| 11696   | 12.7  | 2.35 | 0.678 - 0.814 |
| 1612    | 12.8  | 1.70 | 0.530 - 0.645 |
| 1613/B  | 13.9  | 0.8  | 0.293 - 0.352 |
| K6800   | 14.00 | 4.05 | 1.129 - 1.381 |
| K7576   | 14.60 | 1.00 | 0.115 kg/m    |
| K6776   | 14.65 | 0.90 | 0.346 - 0.423 |
| 1614    | 14.80 | 0.75 | 0.256 - 0.395 |
| 1615    | 15.00 | 2.00 | 0.725 - 0.885 |
| 1615H   | 15.00 | 2.40 | 0.840 - 1.015 |
| 1616L   | 15.00 | 1.20 | 0.490 - 0.590 |
| K7653   | 16.00 | 1.75 | 0.211 kg/m    |
| 1616    | 16.00 | 1.80 | 0.710 - 0.870 |
| K6893   | 16.00 | 3.80 | 1.301 - 1.591 |
| K7075   | 16.80 | 3.40 | 0.392 kg/m    |
| 16117   | 17.45 | 5.20 | 1.800 - 2.154 |
| 11617/A | 17.50 | 2.65 | 1.099 - 1.321 |
| 6901    | 17.90 | 1.30 | 0.590 - 0.750 |
| K7838   | 18.00 | 2.00 | 0.271 kg/m    |
| K6894   | 18.00 | 3.90 | 1.542 - 1.884 |

| SEC NO  | D     | T    | WT/RANGE/12'  |
|---------|-------|------|---------------|
| 1617    | 18.50 | 1.30 | 0.620 - 0.760 |
| 1618    | 18.50 | 1.60 | 0.755 - 0.920 |
| 1619    | 19.00 | 3.50 | 1.510 - 1.850 |
| 1628    | 19.00 | 2.00 | 0.970 - 1.140 |
| 1629    | 19.00 | 0.80 | 0.400 - 0.510 |
| 1630    | 19.00 | 1.00 | 0.500 - 0.610 |
| K6961   | 19.00 | 1.20 | 0.165 - 0.201 |
| 11702   | 19.00 | 2.00 | 0.948 - 1.138 |
| K6726   | 19.00 | 2.00 | 0.948 - 1.138 |
| K7045   | 20.00 | 1.60 | 0.251 kg/m    |
| 11694   | 20.00 | 2.10 | 1.116 - 1.339 |
| K7179   | 20.00 | 3.89 | 0.538 kg/m    |
| K7343   | 20.10 | 1.30 | 0.21 kg/m     |
| K7289   | 20.10 | 1.50 | 0.24 kg/m     |
| 1692    | 21.00 | 5.50 | 2.380 - 2.860 |
| 11621   | 21.00 | 5.00 | 2.235 - 2.682 |
| 11621/A | 21.00 | 3.00 | 1.508 - 1.810 |
| 1621    | 21.50 | 5.00 | 2.300 - 2.810 |
| 1622    | 22.00 | 0.80 | 0.420 - 0.630 |
| 11697   | 22.00 | 2.00 | 0.339 kg/m    |
| K6950   | 22.00 | 2.00 | 0.341 kg/m    |
| 11701   | 22.00 | 3.00 | 1.591 - 1.909 |
| 11711   | 22.00 | 7.00 | 2.944 - 3.600 |
| 1620    | 22.20 | 1.00 | 0.530 - 0.790 |
| K7572   | 22.20 | 2.50 | 0.417 kg/m    |
| K6412   | 22.23 | 3.32 | 1.759 - 2.149 |
| 1623    | 23.00 | 4.5  | 2.325 - 2.840 |
| 2524    | 24.00 | 3.50 | 2.200 - 2.500 |
| 1624    | 24.50 | 2.75 | 1.670 - 2.040 |
| K7288   | 24.80 | 1.50 | 0.3 kg/m      |
| 1625    | 25.00 | 3.00 | 2.050 - 2.350 |
| 1625/A  | 25.00 | 2.00 | 1.285 - 1.570 |
| 1625/B  | 25.00 | 1.60 | 1.040 - 1.280 |
| K6945   | 25.00 | 1.60 | 1.051 - 1.285 |
| 1625/T  | 25.00 | 5.75 | 3.090 - 3.710 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

ROUND PIPE

PAGE 01 - II



D - OUTER DIAMETER  
T - THICKNESS

| SEC NO | D     | T    | WT/RANGE/12'  |
|--------|-------|------|---------------|
| K7344  | 25.10 | 1.30 | 0.266 kg/m    |
| K6677  | 25.40 | 1.50 | 1.980 - 2.410 |
| 1626   | 25.40 | 3.18 | 1.067 - 1.305 |
| 11688  | 25.40 | 2.00 | 1.307 - 1.569 |
| K7571  | 25.40 | 2.50 | 0.485 kg/m    |
| 11700  | 25.40 | 7.70 | 3.807 - 4.569 |
| 1690   | 25.50 | 6.25 | 3.360 - 4.030 |
| 2526   | 26.00 | 3.20 | 2.150 - 2.350 |
| 1627L  | 27.00 | 5.50 | 3.300 - 3.970 |
| K7180  | 27.00 | 7.38 | 1.245 kg/m    |
| 1627   | 27.00 | 6.30 | 4.030 - 4.350 |
| 2527   | 27.00 | 3.20 | 2.200 - 2.500 |
| 2530   | 27.00 | 3.60 | 2.350 - 2.825 |
| K6949  | 28.00 | 2.65 | 0.578 kg/m    |
| 11695  | 28.00 | 5.82 | 3.610 - 4.332 |
| 2528   | 28.00 | 4.00 | 2.800 - 3.000 |
| 2528/A | 28.80 | 3.00 | 2.200 - 2.500 |
| 2529   | 29.00 | 4.50 | 3.080 - 3.696 |
| K7245  | 29.00 | 6.75 | 1.292 kg/m    |
| K7266  | 30.00 | 2.00 | 0.482 kg/m    |
| 1634   | 30.00 | 4.00 | 2.900 - 3.230 |
| 1635   | 30.00 | 3.00 | 2.380 - 2.650 |
| 11630  | 30.00 | 6.00 | 4.022 - 4.826 |
| K7633  | 30.00 | 7.50 | 1.431 kg/m    |
| 1667   | 30.00 | 8.85 | 5.520 - 6.070 |
| K7639  | 30.00 | 8.90 | 1.592 kg/m    |
| 1687   | 30.00 | 7.90 | 4.872 - 5.846 |
| K6743  | 30.00 | 6.50 | 4.286 - 5.238 |
| K7573  | 30.20 | 1.60 | 0.388 kg/m    |
| 1631   | 31.80 | 3.18 | 2.540 - 3.100 |
| 1637   | 31.80 | 1.80 | 1.530 - 1.830 |
| 2531   | 31.80 | 4.50 | 3.600 - 4.100 |
| K6863  | 31.80 | 2.3  | 1.904 - 2.327 |

| SEC NO  | D     | T     | WT/RANGE/12'  |
|---------|-------|-------|---------------|
| 1632    | 32.00 | 4.00  | 3.130 - 3.820 |
| 1674    | 32.00 | 7.00  | 5.240 - 5.625 |
| 11632   | 32.00 | 9.00  | 5.783 - 6.940 |
| K6676   | 32.00 | 5.00  | 3.785 - 4.626 |
| 11632/A | 32.00 | 10.00 | 6.146 - 7.376 |
| 2532    | 32.40 | 3.20  | 2.610 - 3.133 |
| 1633    | 33.00 | 6.20  | 4.640 - 5.670 |
| 1633/T  | 33.00 | 5.75  | 4.690 - 5.030 |
| 1642    | 33.40 | 3.38  | 3.000 - 3.300 |
| K7677   | 33.50 | 3.05  | 0.787 kg/m    |
| K7221   | 33.50 | 5.05  | 1.236 kg/m    |
| K7762   | 33.50 | 6.20  | 1.435 kg/m    |
| K7679   | 33.50 | 7.00  | 1.573 kg/m    |
| 1633/A  | 33.50 | 9.50  | 7.080 - 7.450 |
| 11708   | 33.50 | 9.75  | 7.100 - 7.907 |
| 1633/B  | 33.50 | 12.50 | 7.950 - 8.410 |
| 11709   | 33.50 | 8.875 | 7.000 - 7.738 |
| 1643    | 33.70 | 3.20  | 2.840 - 3.215 |
| K7466   | 33.80 | 1.10  | 0.305 kg/m    |
| 11706   | 33.92 | 8.79  | 6.170 - 7.541 |
| K7763   | 34.00 | 7.40  | 1.669 kg/m    |
| 11634   | 34.30 | 9.05  | 6.242 - 7.490 |
| 2533    | 34.40 | 4.50  | 4.150 - 4.400 |
| K7570   | 34.90 | 2.20  | 0.61 kg/m     |
| 2534    | 34.90 | 4.75  | 4.400 - 4.800 |
| K7198   | 35.00 | 1.50  | 0.432 kg/m    |
| 11698   | 35.00 | 2.50  | 2.270 - 2.714 |
| 2535    | 35.00 | 4.50  | 4.000 - 4.450 |
| 2536    | 35.00 | 3.50  | 3.230 - 3.450 |
| K7540   | 35.00 | 5.75  | 1.426 kg/m    |
| K6742   | 35.00 | 8.50  | 6.318 - 7.722 |
| 11693   | 36.00 | 6.00  | 1.547 kg/m    |
| 1686    | 36.00 | 7.00  | 5.672 - 6.807 |
| 2538    | 36.40 | 5.25  | 4.570 - 5.485 |
| 1636    | 37.00 | 0.85  | 0.870 - 1.060 |
| K6941   | 37.00 | 3.00  | 2.859 - 3.495 |
| 2537    | 37.00 | 4.50  | 4.340 - 4.550 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ROUND PIPE

PAGE 01 - III



D - OUTER DIAMETER  
T - THICKNESS

| SEC NO | D     | T     | WT/RANGE/12'    |
|--------|-------|-------|-----------------|
| 1638L  | 38.00 | 4.5   | 4.200 - 5.000   |
| 1638   | 38.00 | 7.5   | 6.400 - 7.800   |
| K6761  | 38.00 | 8.1   | 6.782 - 8.290   |
| 1639B  | 38.00 | 2.00  | 1.560 - 1.900   |
| 11638  | 38.00 | 5.50  | 4.994 - 5.993   |
| K6874  | 38.00 | 6.75  | 5.917 - 7.231   |
| 1639   | 38.10 | 3.18  | 3.400 - 3.800   |
| 1640   | 38.10 | 6.35  | 5.800 - 6.800   |
| K6864  | 38.10 | 2.10  | 2.187 - 2.673   |
| 1641   | 40.00 | 5.00  | 5.000 - 5.800   |
| 1644   | 40.00 | 3.20  | 3.425 - 3.880   |
| K6896  | 40.00 | 1.60  | 1.723 - 2.105   |
| K7320  | 40.00 | 2.50  | 0.806 kg/m      |
| K6993  | 40.00 | 9.50  | 2.220 - 2.714   |
| K7345  | 40.10 | 1.80  | 0.593 kg/m      |
| 2541   | 41.82 | 4.56  | 5.250 - 5.500   |
| 11692  | 42.00 | 6.00  | 6.034 - 7.241   |
| 11704  | 42.00 | 7.00  | 6.844 - 8.213   |
| K7759  | 42.00 | 10.75 | 2.849 kg/m      |
| 2542   | 42.20 | 4.75  | 5.800 - 6.100   |
| 2543   | 42.80 | 5.25  | 5.510 - 6.610   |
| K7761  | 43.00 | 5.25  | 1.681 kg/m      |
| K7676  | 43.00 | 6.20  | 1.935 kg/m      |
| 1644H  | 43.00 | 7.50  | 7.440 - 8.920   |
| K7569  | 44.00 | 2.00  | 0.712 kg/m      |
| K7710  | 44.00 | 5.10  | 1.682 kg/m      |
| K6564  | 44.00 | 10.5  | 9.862 - 12.054  |
| K7219  | 44.45 | 1.45  | 0.536 kg/m      |
| 1645   | 45.00 | 3.00  | 3.250 - 4.300   |
| 1646   | 45.00 | 10.75 | 11.164 - 11.695 |
| 11639  | 45.00 | 8.25  | 8.472 - 10.167  |
| K7229  | 46.00 | 9.38  | 2.955 kg/m      |
| 2549   | 47.90 | 4.50  | 5.800 - 6.330   |
| K6988  | 48.00 | 1.80  | 0.637 - 0.779   |
| K6582  | 48.00 | 6.50  | 9.25 - 7.566    |
| 1647   | 48.00 | 9.50  | 11.230 - 11.470 |
| 1648   | 48.00 | 8.50  | 9.500 - 11.500  |
| 11648  | 48.00 | 13.00 | 12.713 - 15.255 |
| 11691  | 48.00 | 7.00  | 8.017 - 9.621   |

| SEC NO | D     | T     | WT/RANGE/12'    |
|--------|-------|-------|-----------------|
| K6613  | 48.30 | 4.00  | 5.247 - 6.075   |
| 1649   | 50.00 | 2.50  | 3.450 - 3.922   |
| 1650   | 50.00 | 1.10  | 1.500 - 1.830   |
| 1651   | 50.00 | 10.00 | 11.250 - 13.700 |
| 1652   | 50.00 | 5.00  | 6.300 - 7.600   |
| K6771  | 50.00 | 11.50 | 12.418 - 15.178 |
| K7346  | 50.10 | 2.20  | 0.907 kg/m      |
| K6897  | 50.60 | 1.60  | 2.197 - 2.685   |
| 1653   | 50.80 | 3.18  | 4.250 - 5.150   |
| 1656   | 50.80 | 6.35  | 8.500 - 9.000   |
| 1658   | 50.80 | 2.00  | 2.700 - 3.300   |
| K6865  | 50.80 | 1.80  | 2.474 - 3.024   |
| K7220  | 50.80 | 7.90  | 2.917 kg/m      |
| K7612  | 50.80 | 9.52  | 3.334 kg/m      |
| 1652/A | 52.00 | 7.00  | 8.800 - 10.700  |
| K7192  | 52.00 | 7.50  | 2.872 kg/m      |
| K7318  | 52.00 | 10.00 | 3.615 kg/m      |
| 11707  | 52.82 | 1.69  | 2.408 - 2.943   |
| K7760  | 54.50 | 11.63 | 4.227 kg/m      |
| 1654   | 54.00 | 10.00 | 13.400 - 14.000 |
| 11654  | 54.00 | 12.00 | 14.082 - 16.898 |
| 11690  | 54.00 | 7.00  | 9.193 - 11.032  |
| K7186  | 54.00 | 8.00  | 3.121 kg/m      |
| 1691   | 55.00 | 2.50  | 3.670 - 4.400   |
| K7197  | 55.50 | 9.25  | 3.682 kg/m      |
| 1665   | 56.00 | 2.00  | 3.100 - 3.600   |
| 1655   | 56.00 | 3.00  | 4.930 - 5.755   |
| K7542  | 56.00 | 4.00  | 1.826 kg/m      |
| K7193  | 56.00 | 8.00  | 3.305 kg/m      |
| K7312  | 56.00 | 12.00 | 4.545 kg/m      |
| 1655/A | 56.20 | 1.60  | 2.450 - 2.950   |
| 1657/A | 57.00 | 2.60  | 4.150 - 4.600   |
| 1657   | 58.00 | 10.00 | 14.400 - 15.400 |
| K6719  | 58.00 | 12.00 | 15.482 - 18.922 |
| K7820  | 59.00 | 8.00  | 3.46 kg/m       |
| 1666   | 60.00 | 2.50  | 4.190 - 4.730   |
| K6614  | 60.00 | 5.00  | 8.14 - 9.425    |
| K7196  | 60.00 | 8.50  | 3.76 kg/m       |

ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM

ROUND PIPE

PAGE 01 - IV



D - OUTER DIAMETER  
T - THICKNESS

| SEC NO  | D     | T     | WT/RANGE/12'    |
|---------|-------|-------|-----------------|
| 1659    | 60.41 | 1.63  | 2.700 - 3.200   |
| 1660    | 61.00 | 2.60  | 4.250 - 5.100   |
| 1661    | 61.00 | 3.00  | 4.900 - 5.900   |
| K7234   | 61.50 | 3.00  | 1.51 kg/m       |
| 2562    | 62.00 | 5.30  | 8.395 - 10.075  |
| 1663    | 63.00 | 3.15  | 5.500 - 6.200   |
| K6791   | 63.00 | 2.00  | 3.423 - 4.183   |
| K7905   | 63.50 | 2.30  | 1.193 kg/m      |
| K7678   | 63.50 | 9.50  | 4.351 kg/m      |
| 1662    | 64.00 | 2.50  | 3.462 - 4.230   |
| K7185   | 64.00 | 8.00  | 3.8 kg/m        |
| 1664    | 64.00 | 11.50 | 18.400 - 20.100 |
| 11664   | 64.00 | 15.00 | 20.536 - 24.643 |
| 11664/A | 64.00 | 12.00 | 17.435 - 20.921 |
| K6720   | 65.70 | 2.50  | 4.431 - 5.415   |
| K7347   | 67.60 | 2.30  | 1.292 kg/m      |
| 11668   | 68.00 | 12.5  | 19.379 - 23.255 |
| 1668    | 68.00 | 18.00 | 27.500 - 28.400 |
| 1670    | 70.00 | 4.50  | 8.300 - 10.000  |
| 1671    | 70.00 | 5.00  | 9.700 - 10.500  |
| 1672    | 70.00 | 8.00  | 14.800 - 16.000 |
| 1673    | 70.00 | 10.00 | 18.250 - 19.000 |
| 1677    | 70.00 | 2.80  | 5.500 - 6.170   |
| 1669    | 71.00 | 3.50  | 6.500 - 7.740   |
| 1676    | 73.66 | 1.27  | 2.720 - 3.180   |
| K7529   | 72.00 | 13.50 | 6.698 kg/m      |

| SEC NO | D      | T     | WT/RANGE/12'    |
|--------|--------|-------|-----------------|
| 1675   | 75.00  | 3.5   | 7.760 - 8.870   |
| 1684   | 75.00  | 2.50  | 5.065 - 6.080   |
| 1682   | 76.00  | 8.00  | 15.200 - 18.240 |
| K7423  | 76.00  | 10.50 | 5.92 kg/m       |
| 1676/A | 76.20  | 6.35  | 13.300 - 14.200 |
| 1676/B | 76.20  | 9.50  | 19.260 - 20.085 |
| K7452  | 76.20  | 15.85 | 8.233 kg/m      |
| 1678   | 77.50  | 9.25  | 19.160 - 19.920 |
| 1679   | 77.50  | 9.25  | 19.160 - 19.920 |
| 1680   | 80.00  | 4.50  | 10.300 - 11.240 |
| 1681   | 80.00  | 10.00 | 21.080 - 22.380 |
| 1685   | 80.00  | 4.00  | 8.490 - 10.190  |
| 1683   | 83.80  | 33.15 | 51.890 - 52.360 |
| K6898  | 84.80  | 2.00  | 4.645 - 5.677   |
| K7348  | 84.80  | 2.40  | 1.702 kg/m      |
| K7906  | 88.90  | 2.60  | 1.903 kg/m      |
| 1688   | 88.90  | 5.46  | 13.625 - 14.400 |
| 11699  | 88.90  | 7.62  | 17.303 - 20.764 |
| 1689   | 89.00  | 3.00  | 7.500 - 8.500   |
| 11669  | 89.10  | 1.60  | 3.910 - 4.692   |
| 11689  | 89.10  | 1.60  | 3.911 - 4.694   |
| K7907  | 100.20 | 2.60  | 2.152 kg/m      |
| 1699   | 100.00 | 4.00  | 11.550 - 12.300 |
| K7515  | 100.00 | 6.00  | 4.784 kg/m      |
| 1698/B | 101.50 | 6.35  | 18.150 - 19.300 |
| 1698   | 101.60 | 3.18  | 9.100 - 10.320  |
| K6899  | 101.8  | 2.3   | 6.417 - 7.843   |
| K7349  | 101.80 | 2.50  | 2.136 kg/m      |
| 1697   | 105.00 | 3.15  | 9.330 - 10.590  |
| 1696   | 106.40 | 4.00  | 12.080 - 13.350 |
| K7305  | 108.00 | 9.00  | 7.669 kg/m      |
| 16110  | 110.00 | 3.50  | 10.910 - 12.230 |
| 11703  | 114.20 | 8.51  | 25.129 - 30.155 |
| K7908  | 148.20 | 3.00  | 3.694 kg/m      |
| K7469  | 153.00 | 2.75  | 3.504 kg/m      |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

ROUND ROD

PAGE 02 - I



D - DIAMETER

| SEC NO | D     | WT/RANGE/12'    |
|--------|-------|-----------------|
| 1201   | 6.00  | 0.260-0.320     |
| 1203   | 8.00  | 0.460-0.550     |
| 1209   | 9.00  | 0.620-0.720     |
| 1210   | 9.60  | 0.710-0.800     |
| 1205   | 10.00 | 0.650-0.800     |
| K6911  | 11.00 | 0.850-1.039     |
| 1206   | 11.50 | 1.030 - 1.070   |
| K7309  | 11.70 | 0.294 kg/m      |
| 1212   | 12.20 | 1.115 - 1.200   |
| 1211   | 12.70 | 1.200-1.350     |
| 1214   | 14.00 | 1.369 - 1.643   |
| 1216   | 15.70 | 1.800-2.000     |
| 1220   | 19.00 | 2.730-2.950     |
| 1222   | 22.00 | 3.750-3.950     |
| 1223   | 23.00 | 1.138 kg/m      |
| 1224   | 24.00 | 4.400-4.700     |
| 1225   | 25.40 | 4.800-5.200     |
| 1228   | 28.00 | 6.000-6.500     |
| 1230   | 30.50 | 6.900 - 7.500   |
| K6685  | 32.00 | 7.182 - 8.778   |
| 1235   | 35.00 | 8.558 - 10.269  |
| 1238   | 38.00 | 11.250-11.600   |
| K7090  | 38.50 | 3.189 kg/m      |
| 1239   | 39.60 | 12.078 - 13.286 |
| 1244   | 44.45 | 13.802 - 16.562 |

| SEC NO | D      | WT/RANGE/12'    |
|--------|--------|-----------------|
| 1250   | 50.80  | 20.000-21.000   |
| 1255   | 55.00  | 23.000-24.000   |
| 1257   | 57.00  | 25.000-26.000   |
| 1263   | 63.00  | 30.700-31.700   |
| 1265   | 65.00  | 32.800-33.800   |
| 1270   | 70.00  | 36.600-37.800   |
| 1276   | 76.20  | 45.000-46.000   |
| 1280   | 80.00  | 49.600-51.200   |
| 1290   | 90.00  | 56.578 - 67.893 |
| K7271  | 91.40  | 17.977 kg/m     |
| 1299   | 110.00 | 95.600 - 96.200 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

SQUARE TUBE

PAGE 03 - I



A - SIDE  
T - THICKNESS

| SEC NO | A     | T    | WT/RANGE/12'  |
|--------|-------|------|---------------|
| 1812   | 12.00 | 0.55 | 0.250 - 0.350 |
| 1816   | 16.00 | 0.61 | 0.360 - 0.410 |
| 1816 L | 16.00 | 0.53 | 0.310 - 0.360 |
| 1817   | 17.00 | 0.65 | 0.370 - 0.470 |
| K7409  | 18.00 | 0.60 | 0.114 kg/m    |
| 1818   | 18.00 | 0.85 | 0.500 - 0.650 |
| 1819   | 18.50 | 0.65 | 0.410 - 0.500 |
| 1820   | 19.00 | 2.00 | 1.200 - 1.450 |
| 1855   | 20.00 | 1.60 | 1.100 - 1.300 |
| K7485  | 20.00 | 2.00 | 0.388 kg/m    |
| 1822   | 22.00 | 0.60 | 0.465 - 0.550 |
| 1822 L | 22.00 | 0.50 | 0.380 - 0.465 |
| 1824   | 22.00 | 2.0  | 1.420 - 1.735 |
| 1823   | 23.00 | 0.62 | 0.500 - 0.600 |
| 1823 L | 23.00 | 0.51 | 0.400 - 0.500 |
| 1849   | 24.00 | 0.75 | 0.675 - 0.750 |
| 1854   | 25.00 | 1.50 | 1.450 - 1.650 |
| 1847   | 25.40 | 2.50 | 2.400 - 2.650 |
| 1848   | 25.40 | 2.00 | 1.700 - 2.100 |
| 1851   | 25.40 | 0.85 | 0.740 - 0.900 |
| 1852   | 25.40 | 0.70 | 0.650 - 0.710 |
| 1853   | 25.40 | 0.95 | 0.900 - 1.100 |
| 1848H  | 25.4  | 2.2  | 1.815-2.178   |
| 1828   | 28.00 | 1.20 | 1.300 - 1.500 |
| 1830   | 30.00 | 0.80 | 0.850 - 1.000 |
| 1830 L | 30.00 | 0.67 | 0.700 - 0.850 |
| K7315  | 30.00 | 2.00 | 0.613 kg/m    |
| 1830 H | 30.00 | 3.00 | 3.000 - 3.370 |
| K7314  | 30.00 | 4.00 | 1.139 kg/m    |
| 1832   | 32.00 | 1.40 | 1.700 - 1.900 |

| SEC NO | A      | T    | WT/RANGE/12'    |
|--------|--------|------|-----------------|
| 1832 L | 32.00  | 0.78 | 0.900 - 1.000   |
| 1831   | 32.00  | 5.00 | 4.800 - 5.759   |
| K7690  | 34.00  | 2.00 | 0.691 kg/m      |
| 1837   | 38.00  | 1.60 | 2.070 - 2.530   |
| 1838   | 38.00  | 0.84 | 1.150 - 1.350   |
| 1838L  | 38.00  | 0.59 | 0.800 - 0.950   |
| 1838M  | 38.00  | 1.20 | 1.700 - 1.800   |
| K7316  | 40.00  | 2.00 | 0.832 kg/m      |
| 1882   | 40.00  | 4.00 | 5.122 - 6.146   |
| 1843   | 43.00  | 2.0  | 3.000 - 3.480   |
| 1868   | 50.00  | 1.00 | 1.900 - 2.100   |
| 1869   | 50.00  | 2.00 | 3.800 - 4.100   |
| K7028  | 50.00  | 2.50 | 1.287 kg/m      |
| 1870   | 50.00  | 3.00 | 5.500 - 5.900   |
| 1872   | 50.00  | 1.50 | 2.580 - 3.160   |
| 1881   | 50.00  | 5.00 | 8.004 - 9.605   |
| 1860   | 60.00  | 4.00 | 7.968-9.562     |
| 1871   | 70.00  | 2.00 | 5.500 - 5.800   |
| K6929  | 70.60  | 1.50 | 1.119 kg/m      |
| 7057   | 76.00  | 2.00 | 5.900 - 6.500   |
| 1880   | 80.00  | 7.00 | 19.650 - 20.750 |
| K7384  | 100.00 | 3.00 | 3.189 kg/m      |
| 5055   | 105.00 | 2.50 | 10.200 - 10.700 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

SQUARE BAR

PAGE 04 - I



A - SIDE

| SEC NO | A      | WT/RANGE/12'    |
|--------|--------|-----------------|
| 1015   | 5.00   | 0.220 - 0.265   |
| K7474  | 6.00   | 0.094 kg/m      |
| 1012   | 12.00  | 1.280 -1.560    |
| 1013   | 12.70  | 1.430 -1.730    |
| 1019   | 19.05  | 3.230-3.930     |
| 1025   | 25.00  | 5.600- 6.850    |
| 1030   | 30.00  | 8.460-9.330     |
| K7404  | 32.50  | 2.851 kg/m      |
| 1035   | 35.00  | 11.900-12.300   |
| 1038   | 38.10  | 13.620-15.050   |
| 1050   | 50.80  | 24.220-26.780   |
| K7250  | 51.50  | 7.266 kg/m      |
| K7550  | 61.00  | 10.044 kg/m     |
| 1063   | 63.50  | 37.240-42.420   |
| 1089   | 67.54  | 40.371 - 48.445 |
| 1076   | 76.20  | 55.000-60.000   |
| 1088   | 88.00  | 68.273-82.648   |
| K7443  | 90.00  | 22.193 kg/m     |
| K7136  | 100.00 | 24 kg/m         |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

HEXAGON BAR

PAGE 05 - I

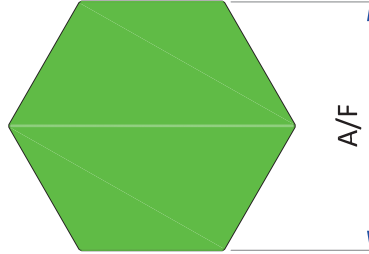

| SEC NO | A/F   | WEIGHT (kg/m) |
|--------|-------|---------------|
| 1081   | 10.00 | 0.234         |
| K6910  | 11.20 | 0.294         |
| 1082   | 27.00 | 1.705         |
| 1080   | 30.00 | 2.081         |
| K6834  | 41.20 | 3.984         |
| 1083   | 50.80 | 6.034         |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

RECTANGULAR TUBE

PAGE 06 - I

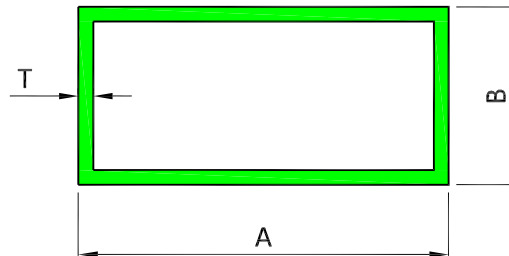

A - WIDTH  
B - HEIGHT  
T - THICKNESS

| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 1911   | 20.00 | 10.00 | 0.80 | 0.450 - 0.495 |
| 6154   | 20.00 | 10.00 | 1.00 | 0.550 - 0.700 |
| 1912   | 25.00 | 12.00 | 0.80 | 0.500 - 0.600 |
| K6558  | 25.00 | 10.00 | 0.80 | 0.484 - 0.592 |
| 1973   | 30.00 | 15.00 | 0.75 | 0.173 kg/m    |
| K7484  | 30.00 | 20.00 | 2.00 | 0.496 kg/m    |
| 1996   | 31.75 | 12.70 | 1.60 | 1.172 - 1.407 |
| 1933   | 33.00 | 20.00 | 1.20 | 1.040 - 1.280 |
| 1914   | 36.00 | 23.00 | 0.58 | 0.700 - 0.800 |
| 1914 L | 36.00 | 23.00 | 0.53 | 0.600 - 0.700 |
| 1913   | 36.50 | 24.50 | 0.70 | 0.780 - 0.910 |
| 1917   | 37.00 | 24.50 | 0.85 | 0.900 - 1.100 |
| 1918   | 37.00 | 25.0  | 0.75 | 0.700 - 1.080 |
| 1915   | 38.00 | 24.00 | 0.66 | 0.800 - 0.900 |
| 1916   | 38.00 | 24.00 | 2.00 | 2.200 - 2.400 |
| 1919   | 38.10 | 25.4  | 0.70 | 0.800 - 0.900 |
| 1932   | 40.00 | 20.00 | 2.30 | 2.450 - 2.700 |
| 1998   | 40.00 | 20.00 | 2.00 | 1.989 - 2.387 |
| 1944   | 44.50 | 38.10 | 1.78 | 2.380 - 2.775 |
| 1923   | 48.00 | 24.00 | 0.66 | 0.850 - 1.000 |
| 1922   | 48.70 | 24.25 | 0.65 | 0.880 - 0.920 |
| 1921   | 49.00 | 24.50 | 0.85 | 1.080 - 1.185 |
| 1925   | 49.00 | 25.00 | 0.75 | 0.845 - 1.300 |
| 1924   | 50.00 | 25.00 | 0.90 | 1.250 - 1.500 |
| 1929   | 50.00 | 25.00 | 1.30 | 1.900 - 2.100 |
| 1930   | 50.00 | 25.00 | 1.50 | 2.100 - 2.300 |
| 1931   | 50.00 | 25.00 | 2.00 | 2.670 - 2.940 |
| 1950   | 50.00 | 20.00 | 1.00 | 1.450 - 1.650 |
| 1951   | 50.00 | 20.00 | 3.00 | 3.540 - 4.050 |
| 1981   | 50.00 | 30.15 | 3.00 | 3.952 - 4.743 |
| 1959   | 60.00 | 40.00 | 3.00 | 5.275 - 5.865 |
| K6809  | 60.00 | 40.00 | 5.00 | 8.034 - 9.820 |
| 1960   | 60.00 | 40.00 | 1.50 | 3.000 - 3.300 |
| 1934   | 63.50 | 38.10 | 0.95 | 1.800 - 2.000 |

| SEC NO | A      | B     | T    | WT/RANGE/12'    |
|--------|--------|-------|------|-----------------|
| 1935   | 63.50  | 38.10 | 1.10 | 2.000 - 2.200   |
| 1936   | 63.50  | 38.10 | 1.25 | 2.300 - 2.500   |
| 1937   | 63.00  | 38.10 | 1.35 | 2.600 - 2.800   |
| 1938   | 63.50  | 38.10 | 1.45 | 2.800 - 3.000   |
| 1939   | 63.50  | 38.10 | 1.55 | 3.100 - 3.300   |
| 1940   | 63.50  | 38.10 | 1.65 | 3.300 - 3.500   |
| 1941   | 63.50  | 38.10 | 2.00 | 3.600 - 4.000   |
| 1993   | 70.00  | 20.00 | 2.00 | 3.057 - 3.668   |
| K7782  | 71.00  | 21.00 | 2.00 | 0.95 kg/m       |
| 1970   | 75.00  | 24.50 | 0.70 | 1.300 - 1.400   |
| 1974   | 75.00  | 25.00 | 2.00 | 3.750 - 4.150   |
| 1975   | 75.00  | 25.00 | 3.00 | 5.300 - 5.800   |
| 1976   | 76.00  | 38.00 | 3.00 | 6.500 - 7.000   |
| 1976 A | 76.00  | 38.00 | 2.00 | 3.907 - 4.688   |
| K7056  | 76.20  | 50.80 | 3.17 | 2.095 kg/m      |
| 1980   | 80.00  | 45.00 | 1.80 | 4.000 - 4.400   |
| K6724  | 80.00  | 50.00 | 3.00 | 6.641 - 8.117   |
| 1978   | 82.00  | 38.00 | 1.50 | 3.600 - 4.000   |
| 1979   | 82.00  | 38.00 | 3.00 | 6.700 - 7.000   |
| K7030  | 100.00 | 25.00 | 1.50 | 0.992 kg/m      |
| 1982   | 100.00 | 25.00 | 1.90 | 4.500 - 5.000   |
| 1990   | 100.00 | 55.00 | 2.00 | 5.478 - 6.573   |
| 1994   | 100.00 | 50.00 | 3.00 | 7.685 - 9.222   |
| K6748  | 100.00 | 30.00 | 3.00 | 6.641 - 8.117   |
| 1988   | 101.6  | 44.45 | 1.35 | 3.800 - 4.200   |
| 1991   | 101.6  | 44.45 | 2.00 | 5.500 - 6.000   |
| 19001  | 101.60 | 50.00 | 4.00 | 10.214 - 12.257 |
| 1997   | 103.00 | 46.00 | 3.60 | 8.900 - 10.680  |
| 1992   | 120.0  | 60.00 | 5.00 | 16.125 - 17.470 |
| 1977   | 120.0  | 50.00 | 3.00 | 8.911 - 10.694  |
| K7057  | 120.0  | 80.00 | 3.00 | 3.188 kg/m      |
| K6723  | 130.0  | 50.00 | 3.00 | 9.319 - 11.39   |
| 1995   | 150.00 | 50.00 | 2.50 | 8.669 - 10.403  |
| K6692  | 160.00 | 40.00 | 4.00 | 13.713 - 16.761 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

RECTANGLE TUBE WITH FULL RADIUS

PAGE 06A - I

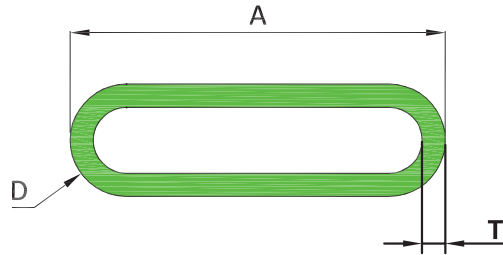

A - WIDTH  
D - DIAMETER  
T- THICKNESS

| SEC NO  | A     | D     | T    | kg/m  |
|---------|-------|-------|------|-------|
| K6959 A | 33.00 | 13.00 | 1.20 | 0.253 |
| K6960 A | 38.00 | 20.00 | 1.20 | 0.312 |
| K6959   | 34.00 | 13.70 | 1.55 | 0.340 |
| K6960   | 38.90 | 21.20 | 1.80 | 0.456 |

COMMERCIAL

COMMERCIAL

ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM

FLAT BAR

PAGE 07 - I

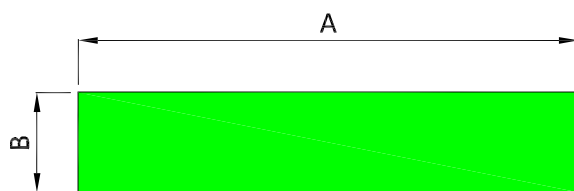

A - WIDTH  
B - THICKNESS

| SEC NO | A     | B     | WT/RANGE/12'  |
|--------|-------|-------|---------------|
| K6939  | 6.35  | 3.20  | 0.181 - 0.221 |
| K7617  | 10.00 | 4.00  | 0.107 kg/m    |
| 1173   | 12.70 | 6.35  | 0.675 - 0.740 |
| 11113  | 13.00 | 4.20  | 0.480 - 0.580 |
| 1105   | 15.00 | 8.00  | 1.060-1.300   |
| 1106   | 18.00 | 2.00  | 0.320-0.380   |
| 1107   | 19.00 | 5.00  | 0.840-1.000   |
| 1108   | 19.00 | 3.00  | 0.415-0.500   |
| 1110   | 19.00 | 10.00 | 1.690-2.050   |
| 1113   | 19.00 | 6.00  | 1.010-1.240   |
| K6411  | 19.05 | 6.35  | 1.081 - 1.321 |
| 1111   | 25.00 | 2.00  | 0.450-0.550   |
| 1114   | 25.00 | 3.00  | 0.520-0.600   |
| 1118   | 25.00 | 10.00 | 2.220-2.720   |
| 1119   | 25.00 | 12.00 | 2.700-3.230   |
| 1120   | 25.00 | 18.00 | 4.000-4.850   |
| 1197   | 25.00 | 6.00  | 1.335 - 1.600 |
| 1116   | 25.40 | 6.35  | 1.430-1.730   |
| K6409  | 25.40 | 4.78  | 1.074 - 1.312 |
| K6410  | 28.19 | 4.78  | 1.195 - 1.461 |
| 1122   | 28.70 | 4.50  | 1.150-1.400   |
| 1115   | 31.00 | 3.50  | 1.000 - 1.130 |
| K6469  | 31.80 | 6.50  | 1.802 - 2.202 |
| 1121   | 32.00 | 6.00  | 1.700-2.100   |
| 1123   | 32.00 | 10.00 | 3.100-3.225   |

| SEC NO | A     | B     | WT/RANGE/12'  |
|--------|-------|-------|---------------|
| 1124   | 32.00 | 12.00 | 3.400-4.200   |
| K7290  | 32.00 | 12.70 | 1.113 kg/m    |
| 1199   | 32.00 | 25.00 | 7.115 - 8.540 |
| K6711  | 35.00 | 2.00  | 0.623 - 0.761 |
| K6729  | 35.00 | 3.9   | 1.212 - 1.482 |
| K6801  | 35.00 | 2.96  | 0.925 - 1.131 |
| 11107  | 36.00 | 4.00  | 1.278 - 1.533 |
| 1135   | 38.00 | 6.00  | 2.000-2.500   |
| 1112   | 38.10 | 25.40 | 9.075-10.025  |
| 1117   | 38.10 | 3.00  | 1.050-1.200   |
| 1125   | 38.10 | 6.35  | 2.150-2.630   |
| 1127   | 38.10 | 12.70 | 4.550-5.000   |
| 1126   | 40.00 | 10.00 | 3.600-4.200   |
| 1126/A | 40.00 | 16.00 | 6.000-6.600   |
| 1172   | 40.0  | 6.0   | 2.250 - 2.475 |
| 1174   | 41.0  | 20.0  | 7.975 - 8.230 |
| K7377  | 44.60 | 27.50 | 3.358 kg/m    |
| 11131  | 49.00 | 9.50  | 4.600 - 4.695 |
| 1128   | 50.00 | 10.00 | 4.700-5.200   |
| 1129   | 50.00 | 2.00  | 0.890-1.090   |
| 1129/A | 50.00 | 8.00  | 3.750-4.130   |
| 1132   | 50.00 | 12.00 | 5.640-6.220   |
| 1143/A | 50.00 | 20.00 | 9.800-10.800  |
| 1144L  | 50.00 | 2.69  | 1.190-1.430   |
| 1144   | 50.40 | 3.00  | 1.420-1.560   |
| 1130   | 50.80 | 6.35  | 3.000-3.350   |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

FLAT BAR

PAGE 07 - II

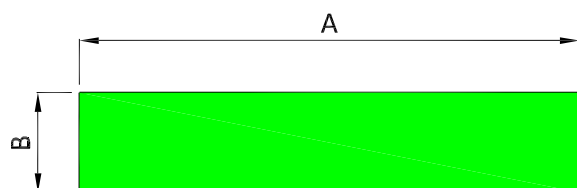

A - WIDTH  
B - THICKNESS

| SEC NO | A     | B     | WT/RANGE/12'    |
|--------|-------|-------|-----------------|
| 1130/A | 50.80 | 15.88 | 7.600-8.370     |
| 1131   | 50.80 | 25.40 | 12.700-13.500   |
| 1131/A | 50.80 | 9.50  | 4.550-5.000     |
| 1133   | 50.80 | 12.70 | 6.000-6.700     |
| 1143   | 50.80 | 19.05 | 9.100-10.000    |
| 1152   | 52.00 | 17.00 | 8.650-8.810     |
| 1151   | 52.25 | 3.25  | 1.620-1.720     |
| K7441  | 55.00 | 40.00 | 6.027 kg/m      |
| 11109  | 57.00 | 3.00  | 1.518 - 1.822   |
| 1164   | 58.00 | 8.00  | 4.380 - 4.780   |
| K6695  | 60.00 | 4.00  | 2.142 - 2.618   |
| 1145   | 60.00 | 6.00  | 3.400 - 3.800   |
| K6925  | 60.00 | 15.00 | 8.034 - 9.820   |
| K7442  | 60.00 | 55.00 | 9.041 kg/m      |
| K7827  | 60.50 | 10.00 | 1.632 kg/m      |
| K6948  | 60.96 | 6.00  | 0.991 kg/m      |
| 1136   | 63.00 | 10.00 | 5.950-6.550     |
| 1134   | 63.50 | 6.35  | 3.800-4.200     |
| 1137   | 63.50 | 12.70 | 7.570-8.370     |
| 1141   | 63.50 | 38.10 | 22.800-24.800   |
| 11106  | 64.00 | 14.0  | 7.900 - 9.480   |
| 1165   | 65.00 | 10.00 | 6.200 - 6.600   |
| K6728  | 68.00 | 12.00 | 7.283 - 8.902   |
| 1139   | 74.00 | 14.00 | 9.720-10.720    |
| 1138   | 75.00 | 10.00 | 7.000-7.800     |
| K6909  | 75.00 | 35.00 | 23.433 - 28.641 |
| 1178   | 75.0  | 12.00 | 8.000-9.600     |
| 1140   | 76.20 | 6.00  | 4.300-4.730     |

| SEC NO | A      | B     | WT/RANGE/12'    |
|--------|--------|-------|-----------------|
| 1142   | 76.20  | 12.70 | 9.100-10.000    |
| 1175   | 76.20  | 25.40 | 18.300-20.000   |
| 1176   | 76.20  | 15.88 | 12.600-13.900   |
| 1146   | 80.00  | 14.00 | 10.520-11.620   |
| 1146/A | 80.00  | 10.00 | 7.600-8.300     |
| K7553  | 80.00  | 50.00 | 10.797 kg/m     |
| K7552  | 80.00  | 65.00 | 14.037 kg/m     |
| 1166   | 85.00  | 8.00  | 6.500 - 6.900   |
| 1147   | 100.0  | 8.00  | 7.500-8.300     |
| 1148   | 100.0  | 10.0  | 9.400-10.400    |
| 1179   | 100.0  | 12.00 | 10.670-12.800   |
| K7551  | 100.00 | 59.00 | 15.927 kg/m     |
| 1149   | 101.6  | 6.35  | 6.000-6.500     |
| 1150   | 101.6  | 12.70 | 12.200-13.400   |
| 1180   | 101.60 | 15.88 | 15.200-16.700   |
| 1181   | 101.60 | 19.05 | 18.900-19.300   |
| 1182   | 101.60 | 25.40 | 25.300-25.700   |
| 1183   | 101.60 | 50.80 | 50.500-51.500   |
| 11105  | 105.00 | 5.0   | 4.980 - 5.395   |
| 11108  | 107.00 | 3.00  | 2.852 - 3.423   |
| 11110  | 110.00 | 7.90  | 7.826 - 9.392   |
| 1167   | 112.00 | 8.00  | 8.560 - 9.140   |
| K6675  | 114.00 | 3.00  | 3.047 - 3.725   |
| K7374  | 114.00 | 8.00  | 2.498 kg/m      |
| 1168   | 116.00 | 8.00  | 8.870 - 9.466   |
| 1169   | 120.0  | 8.0   | 10.450 - 11.150 |
| 1154   | 125.0  | 12.00 | 14.100-15.500   |
| 1159   | 125.00 | 10.00 | 11.800-12.800   |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

FLAT BAR

PAGE 07 - III

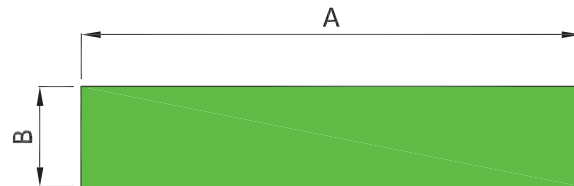

A - WIDTH  
B - THICKNESS


| SEC NO | A      | B     | WT/RANGE/12'    |
|--------|--------|-------|-----------------|
| 1198   | 125.30 | 5.00  | 5.570 - 6.685   |
| 1158   | 127.00 | 6.35  | 7.600-8.600     |
| 1184   | 127.00 | 16.00 | 19.100-21.000   |
| 1185   | 127.00 | 20.00 | 24.800-25.300   |
| 1186   | 127.00 | 25.40 | 31.500-32.800   |
| 1187   | 127.00 | 32.00 | 39.800-40.600   |
| 1188   | 127.00 | 40.00 | 49.700-50.700   |
| 1189   | 127.00 | 50.80 | 63.200-65.400   |
| 1177   | 140.0  | 10.00 | 12.450-14.940   |
| 1170   | 140.0  | 8.0   | 10.700 - 11.440 |
| 1156   | 150.0  | 10.00 | 14.100-15.500   |
| 1171   | 150.0  | 12.0  | 10.700 - 11.440 |
| 1190   | 152.00 | 25.00 | 36.500-38.500   |
| 1155   | 152.4  | 6.35  | 9.100-10.000    |
| 1157   | 152.4  | 12.70 | 18.200-20.000   |
| 1191   | 152.40 | 19.05 | 28.400-29.000   |
| 1193   | 160.0  | 10.00 | 15.400-16.200   |
| K7350  | 160.0  | 25.00 | 10.959 kg/m     |
| K6579  | 170.0  | 10.00 | 15.175 - 18.547 |
| 1192   | 177.80 | 12.70 | 22.000-22.600   |
| 1196   | 180.0  | 10.0  | 16.000 - 19.210 |
| 1195   | 190.0  | 4.0   | 7.130 - 7.880   |
| 1162   | 200.00 | 12.00 | 23.300-24.100   |
| 1163   | 200.00 | 10.00 | 18.800-20.700   |

| SEC NO | A      | B     | WT/RANGE/12'    |
|--------|--------|-------|-----------------|
| 11194  | 200.00 | 6.00  | 10.673 - 12.807 |
| 1194   | 201.6  | 6.35  | 12.200-13.100   |
| 1160   | 203.20 | 12.70 | 24.300-26.500   |
| 1161   | 203.20 | 9.52  | 18.200-20.000   |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

FLAT BAR WITH CORNER RADIUS

PAGE 07A - I

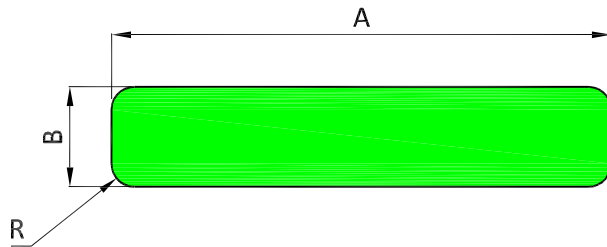

A - WIDTH  
B - THICKNESS

| SEC NO | A     | B     | R           | WEIGHT (kg/m) |
|--------|-------|-------|-------------|---------------|
| K7819  | 40.00 | 29.00 | 1.00        | 3.129         |
| K7488  | 40.00 | 30.00 | 2.00        | 3.23          |
| K7454  | 45.00 | 8.00  | 3.00        | 0.951         |
| K7722  | 50.00 | 8.00  | 3.00        | 1.059         |
| K7827  | 60.50 | 10.00 | 0.50        | 1.632         |
| K6917  | 85.00 | 16.00 | 3.00        | 3.700         |
| K7818  | 85.00 | 74.00 | 1.00        | 16.98         |
| K6920  | 75.00 | 16.00 | 3.00        | 3.266         |
| K7514  | 63.50 | 8.00  | 3.00        | 1.35          |
| K7649  | 101.6 | 15.88 | 3.00        | 4.335         |
| K7680  | 101.6 | 20.00 | 3.00        | 5.465         |
| K7578  | 102.0 | 32.90 | 2.30        | 9.048         |
| K7655  | 127.0 | 20.00 | 3.00        | 6.837         |
| K7713  | 77.85 | 21.00 | 8.00        | 4.265         |
| K7714  | 98.00 | 21.00 | 8.00 / 0.50 | 5.482         |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

RADIUS FLAT BAR

PAGE 08 - I



A - WIDTH  
B - THICKNESS

| SEC NO | A      | B     | WT/RANGE/12'    |
|--------|--------|-------|-----------------|
| 6419   | 9.30   | 1.20  | 0.090 - 0.130   |
| 6416   | 10.80  | 1.20  | 0.120 - 0.170   |
| 1572   | 15.88  | 2.03  | 0.278 - 0.334   |
| 1571   | 20.00  | 2.50  | 0.431 - 0.517   |
| 1573   | 36.50  | 3.20  | 1.017 - 1.221   |
| 1540   | 38.00  | 6.00  | 2.100-2.250     |
| K7303  | 38.10  | 8.636 | 0.857 kg/m      |
| K6822  | 40.00  | 20.00 | 6.390 - 7.810   |
| 1545   | 45.00  | 5.00  | 2.170-2.600     |
| 1550   | 50.00  | 10.00 | 4.700-4.900     |
| 1552   | 50.00  | 12.00 | 5.600-5.800     |
| 1549   | 50.00  | 5.00  | 2.175 - 2.610   |
| 1567   | 63.50  | 6.00  | 3.319 - 3.983   |
| 1564   | 64.00  | 14.00 | 8.400-8.600     |
| 1566   | 64.50  | 3.00  | 1.700 - 2.050   |
| 1565   | 65.00  | 12.00 | 7.480 - 7.940   |
| 1570   | 70.00  | 14.00 | 8.340-10.000    |
| K7516  | 70.00  | 20.00 | 3.779 kg/m      |
| 1575   | 75.00  | 14.00 | 9.900-10.100    |
| 1577   | 77.00  | 13.00 | 9.500-10.300    |
| 1580   | 80.00  | 14.00 | 10.600-11.200   |
| 1585   | 85.00  | 14.00 | 11.300-12.300   |
| 8195   | 91.25  | 34.75 | 24.832 - 29.798 |
| 1569   | 100.00 | 3.00  | 2.648 - 3.178   |
| 1568   | 120.00 | 3.50  | 3.712 - 4.454   |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

EQUAL ANGLE

PAGE 09 - I

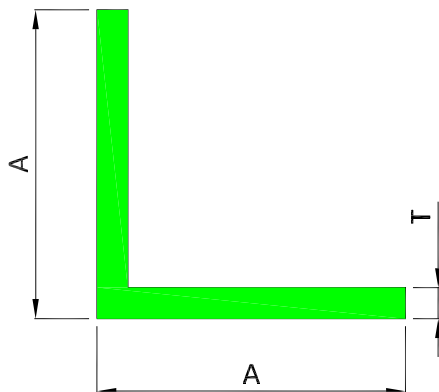

A - WIDTH / HEIGHT  
T - THICKNESS

| SEC NO | A     | T    | WT/RANGE/12'  |
|--------|-------|------|---------------|
| 1312   | 12.00 | 0.70 | 0.140 - 0.170 |
| 1317   | 19.00 | 0.65 | 0.215 - 0.260 |
| 1318   | 18.00 | 1.50 | 0.500 - 0.700 |
| 1319   | 19.00 | 2.00 | 0.700 - 0.900 |
| K7940  | 25.25 | 1.20 | 0.159 kg/m    |
| 1320   | 25.40 | 0.70 | 0.350 - 0.450 |
| 1321   | 25.40 | 0.95 | 0.450 - 0.550 |
| 1322   | 25.40 | 1.10 | 0.550 - 0.650 |
| 1323   | 25.40 | 1.35 | 0.700 - 0.800 |
| 1324   | 25.40 | 1.60 | 0.800 - 0.950 |
| 1328   | 25.40 | 1.35 | 1.100 - 1.300 |
| 1329   | 25.40 | 3.00 | 1.300 - 1.500 |
| 1329/A | 25.40 | 3.40 | 1.510 - 1.665 |
| 1332   | 31.90 | 2.80 | 1.650 - 1.850 |
| 1338   | 38.00 | 1.45 | 1.000 - 1.100 |
| 1341   | 38.10 | 1.60 | 1.100 - 1.300 |
| 1344   | 38.10 | 2.30 | 1.600 - 1.900 |
| 1346   | 38.10 | 3.00 | 2.000 - 2.300 |
| 1349   | 38.10 | 4.75 | 3.200 - 3.500 |
| 1351   | 38.10 | 6.00 | 4.000 - 4.300 |
| 1352   | 40.00 | 6.00 | 4.385 - 4.823 |
| K6763  | 44.00 | 1.50 | 1.159 - 1.417 |
| 1350   | 50.00 | 2.00 | 2.000 - 2.400 |
| 1365   | 50.00 | 4.70 | 3.982 - 4.779 |
| 1353   | 50.00 | 4.50 | 3.818 - 4.666 |
| 1366   | 50.80 | 6.35 | 5.800 - 6.200 |

| SEC NO | A     | T     | WT/RANGE/12'    |
|--------|-------|-------|-----------------|
| 1367   | 50.80 | 3.00  | 2.700 - 3.100   |
| 1360   | 60.00 | 4.00  | 4.375 - 4.800   |
| 1363   | 63.50 | 2.00  | 3.360 - 4.000   |
| 1354   | 63.50 | 6.00  | 6.453 - 7.887   |
| 1375   | 75.00 | 6.00  | 8.000 - 8.500   |
| 1376   | 75.00 | 10.00 | 13.700 - 14.500 |
| 1339   | 100.0 | 3.00  | 5.047 - 6.309   |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

UNEQUAL ANGLE

PAGE 10 - I

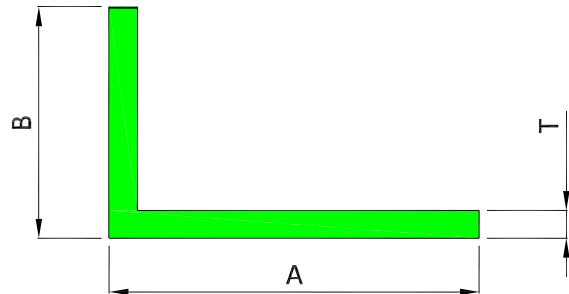

A - WIDTH  
B - HEIGHT  
T - THICKNESS

| SEC NO | A      | B      | T    | WT/RANGE/12'  |
|--------|--------|--------|------|---------------|
| 1410   | 10.00  | 6.00   | 1.00 | 0.150 - 0.225 |
| 1418   | 18.50  | 12.00  | 1.85 | 0.470 - 0.565 |
| 1419   | 19.0   | 12.50  | 0.65 | 0.175 - 0.215 |
| 1426   | 25.00  | 15.00  | 2.00 | 0.740 - 0.940 |
| 1427   | 25.00  | 20.00  | 2.00 | 0.900 - 1.050 |
| K7524  | 25.40  | 19.05  | 3.18 | 0.354 kg/m    |
| 1430   | 30.00  | 20.00  | 2.20 | 0.950 - 1.150 |
| K7251  | 35.00  | 12.00  | 2.00 | 0.246 kg/m    |
| 1425   | 25.40  | 12.70  | 1.30 | 0.450 - 0.550 |
| 1440   | 40.00  | 18.00  | 2.50 | 1.350 - 1.550 |
| 1452   | 38.10  | 25.40  | 2.20 | 1.300 - 1.500 |
| 1454   | 38.10  | 25.40  | 2.85 | 1.600 - 1.800 |
| 1445   | 45.00  | 35.00  | 2.00 | 1.500 - 1.700 |
| 1446   | 40.00  | 45.00  | 6.00 | 3.768 - 4.522 |
| 1450   | 50.00  | 25.00  | 2.80 | 2.050 - 2.350 |
| 1451   | 38.10  | 25.40  | 2.00 | 1.100 - 1.300 |
| K6737  | 50.00  | 30.00  | 3.00 | 2.052 - 2.508 |
| 1453   | 50.00  | 38.00  | 3.00 | 2.270 - 2.720 |
| 1497   | 50.00  | 100.50 | 6.00 | 7.710 - 9.250 |
| 1455   | 55.00  | 45.00  | 4.00 | 3.410 - 4.170 |
| 1435   | 55.00  | 35.00  | 2.50 | 1.897-2.277   |
| 7203   | 60.00  | 50.00  | 2.70 | 2.650 - 3.100 |
| 1466   | 66.00  | 33.00  | 6.00 | 5.400 - 6.000 |
| 1475   | 75.00  | 25.00  | 3.00 | 2.850 - 3.250 |
| 1476   | 76.20  | 50.80  | 6.35 | 7.400 - 8.100 |
| 1485   | 85.00  | 25.00  | 2.50 | 2.500 - 2.800 |
| 1498   | 100.00 | 45.00  | 4.00 | 5.000- 6.100  |
| 1499   | 100.50 | 50.00  | 5.00 | 6.490 - 7.790 |
| K7689  | 120.0  | 50.00  | 5.00 | 2.227 kg/m    |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL






# KMC ALUMINIUM

SINGLE CHANNEL / U - CHANNEL

PAGE 11 - I

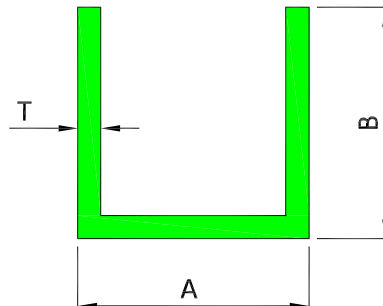

A - WIDTH  
B - HEIGHT  
T - THICKNESS


| SEC NO | A      | B      | T    | WT/RANGE/12'  |
|--------|--------|--------|------|---------------|
| 2081   | 9.30   | 9.40   | 0.70 | 0.165-0.200   |
| 2079   | 11.50  | 11.50  | 0.80 | 0.230-0.280   |
| 2085   | 12.00  | 12.00  | 0.90 | 0.270-0.330   |
| K7440  | 12.00  | 12.00  | 1.25 | 0.114 kg/m    |
| K7839  | 15.00  | 15.00  | 3.00 | 0.315 kg/m    |
| 6321   | 16.30  | 16.0   | 1.40 | 0.600 - 0.750 |
| K7790  | 22.00  | 25.00  | 1.20 | 0.225 kg/m    |
| 8609   | 31.5   | 40.00  | 2.00 | 1.907-2.289   |
| 3902   | 33.89  | 14.96  | 2.00 | 1.075 - 1.275 |
| 2087   | 45.00  | 22.00  | 0.70 | 0.465-0.740   |
| 2050   | 50.00  | 50.00  | 3.80 | 4.830-5.900   |
| 2052   | 50.00  | 25.00  | 1.20 | 1.040-1.270   |
| 2053   | 50.00  | 25.00  | 3.00 | 2.500-3.060   |
| 2056   | 56.00  | 50.00  | 3.00 | 4.000 - 4.800 |
| 8628   | 60.00  | 80.00  | 5.00 | 9.335-11.202  |
| 8629   | 60.00  | 110.00 | 5.00 | 12.003-14.402 |
| K6663  | 63.00  | 10.00  | 5.00 | 0.722 - 0.882 |
| 2092   | 70.00  | 30.00  | 4.00 | 4.338 - 5.205 |
| 3106   | 101.00 | 39.80  | 2.90 | 4.500-5.500   |

ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

## FLUTED PIPE




D - OUTER DIAMETER  
T - THICKNESS

| SEC NO | D     | T    | WT/RANGE/12'  |
|--------|-------|------|---------------|
| 1515H  | 24.00 | 0.55 | 0.450 - 0.550 |
| 1524   | 25.00 | 2.23 | 1.170-1.430   |
| 1525   | 25.00 | 1.15 | 0.500 - 0.600 |
| 1527   | 25.00 | 1.30 | 0.670 - 0.800 |
| 1526   | 25.20 | 3.00 | 1.600 - 1.930 |
| K7841  | 30.00 | 1.60 | 0.317 kg/m    |
| 1531   | 30.80 | 5.00 | 3.274 - 3.929 |

## RECTANGULAR TUBE WITH C.RADIUS

PAGE 12 - I

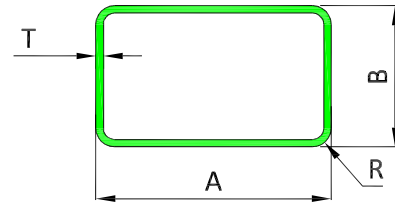

A - WIDTH  
B - HEIGHT  
T - THICKNESS  
R - RADIUS

| SEC NO | A     | B     | T    | R    | WT/RANGE/12'  |
|--------|-------|-------|------|------|---------------|
| 1973   | 30.00 | 15.00 | 0.75 | 2.00 | 0.173 kg/m    |
| 1961   | 61.00 | 26.00 | 1.50 | 3.00 | 2.400-2.800   |
| K6646  | 65.00 | 24.00 | 1.20 | 5.30 | 1.769 - 2.162 |
| 1972   | 72.00 | 25.00 | 1.50 | 3.00 | 2.650-2.950   |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

GENERAL


PAGE 13 - I

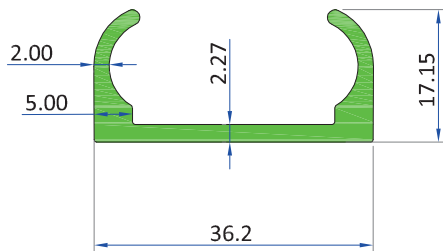


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8916   | 1.511 - 1.814 |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5318   | 2.734- 3.280 |

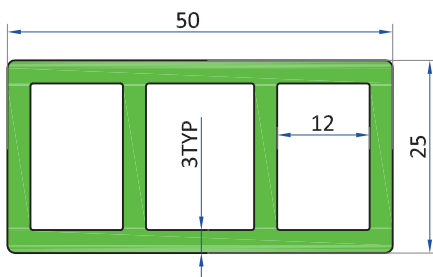


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8922   | 4.687 - 5.624 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8917   | 0.543 - 0.652 |




| SEC NO | A      | B     | T    | WT/RANGE/12'  |
|--------|--------|-------|------|---------------|
| 2150   | 14.0   | 9.00  | 1.0  | 0.290 - 0.400 |
| 2153   | 22.22  | 12.00 | 0.85 | 0.400-0.500   |
| 2154   | 24.750 | 10.90 | 1.0  | 0.450 - 0.620 |
| 2155   | 27.3   | 10.50 | 2.50 | 1.150- 1.500  |
| 2159   | 22.22  | 12.00 | 1.40 | 0.750 - 0.800 |
| 3074   | 22.4   | 14.00 | 0.60 | 0.330 - 0.390 |

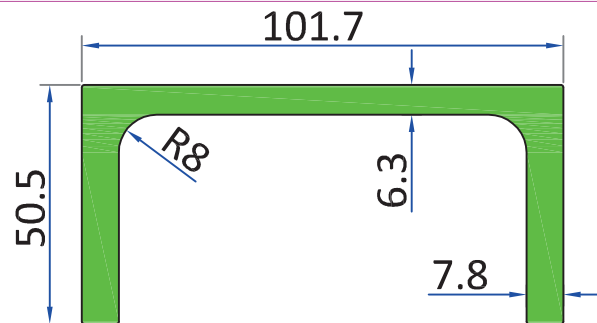

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 7409   | 12.000 - 14.485 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3074   | 0.330 - 0.390 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 7022   | 28.00 | 23.50 | 2.10 | 1.400-1.600   |
| 7022L  | 28.00 | 23.50 | 1.95 | 1.300 - 1.400 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

GENERAL


PAGE 13 - II




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8014   | 3.260-3.700  |




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2352   | 37.80 | 27.80 | 1.70 | 1.600 - 1.800 |




| SEC NO | A     | B    | T    | WT/RANGE/12' |
|--------|-------|------|------|--------------|
| 7023   | 24.00 | 8.00 | 1.10 | 0.370-0.430  |




| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 2110   | 22.22 | 12.00 | 0.63 | 0.325-0.375  |
| 2111   | 22.22 | 12.00 | 0.80 | 0.390-0.435  |
| 2112   | 22.22 | 12.00 | 0.95 | 0.465-0.570  |
| 2114   | 22.22 | 12.00 | 1.10 | 0.530-0.650  |
| 2120   | 30.00 | 15.00 | 0.80 | 0.510-0.630  |
| 2121   | 28.30 | 14.10 | 0.80 | 0.484-0.581  |
| 2123   | 28.30 | 14.10 | 1.13 | 2.220-2.664  |

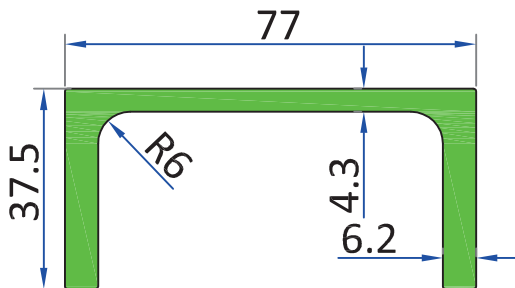


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7410   | 6.740 - 8.100 |



| SEC NO | WEIGHT kg/m |
|--------|-------------|
| 3119   | 1.132       |



| SEC NO | WEIGHT kg/m |
|--------|-------------|
| 2289   | 0.106       |

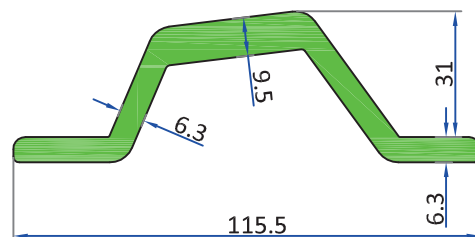

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| 8265   | 2.787       |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

AC GRILL


PAGE 14 - I

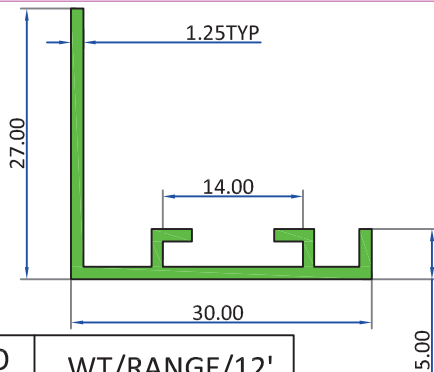


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5303   | 0.800- 0.960 |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5301   | 0.948- 1.138 |

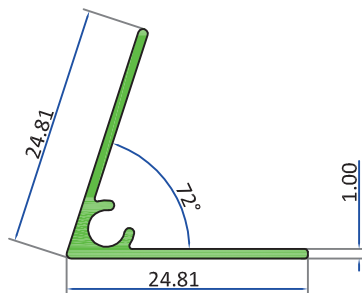


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5302   | 0.497- 0.596 |

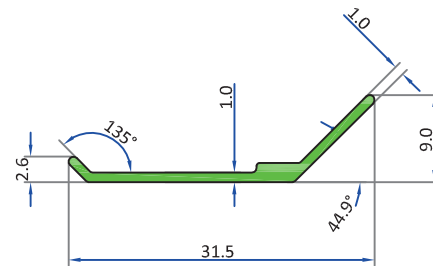


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5304   | 0.342- 0.411 |

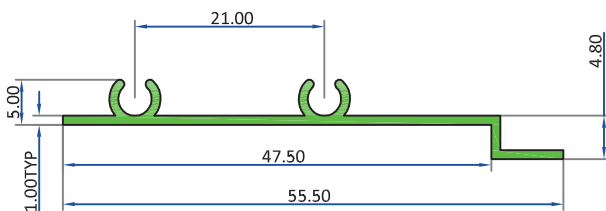


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 5313   | 0.681 - 0.818 |

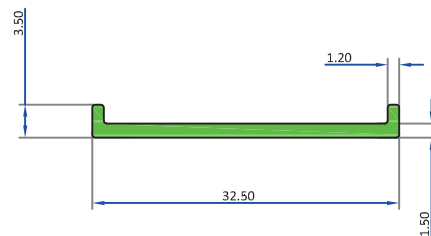

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5315   | 0.474- 0.379 |

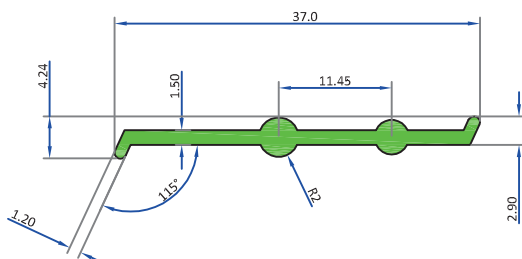

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5316   | 0.602- 0.723 |

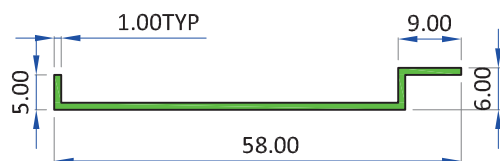

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 5314   | 0.592 - 0.711 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

AC GRILL


PAGE 14 - II




| SEC NO | A    | B    | C   | T   | WT/RANGE/12'  |
|--------|------|------|-----|-----|---------------|
| 6392   | 15.7 | 24.7 | 9.0 | 0.9 | 0.370 - 0.590 |
| 6393   | 15.7 | 19.0 | 6.8 | 0.9 | 0.340 - 0.450 |
| 6394   | 15.7 | 15.0 | 4.6 | 0.9 | 0.300 - 0.400 |

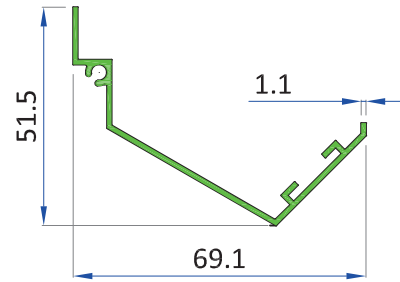


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6046   | 1.320-1.580  |



| SEC NO | A     | B    | D° | T    | WT/RANGE/12'  |
|--------|-------|------|----|------|---------------|
| 6034   | 15.70 | 7.90 | 30 | 1.00 | 0.240 - 0.330 |
| 7019   | 15.70 | 7.30 | 23 | 1.00 | 0.300-0.370   |
| 7020   | 15.70 | 9.50 | 40 | 0.90 | 0.260-0.320   |
| 8022   | 15.70 | 6.43 | 16 | 0.85 | 0.230 - 0.290 |

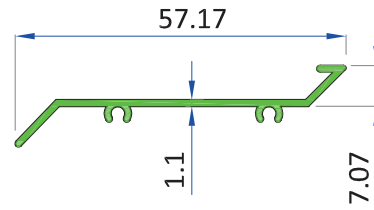

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6047   | 0.750-0.910  |

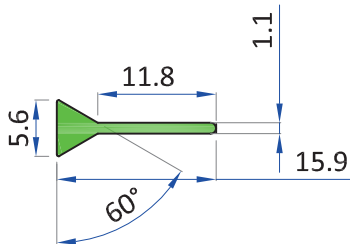

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7021   | 0.240-0.290  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

AC GRILL

PAGE 14 - III

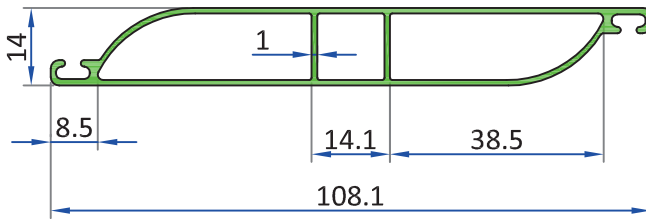


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6149   | 0.696         |

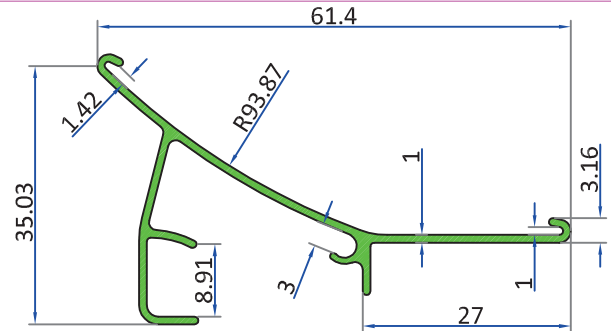


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8212   | 0.340         |


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6150   | 0.993         |

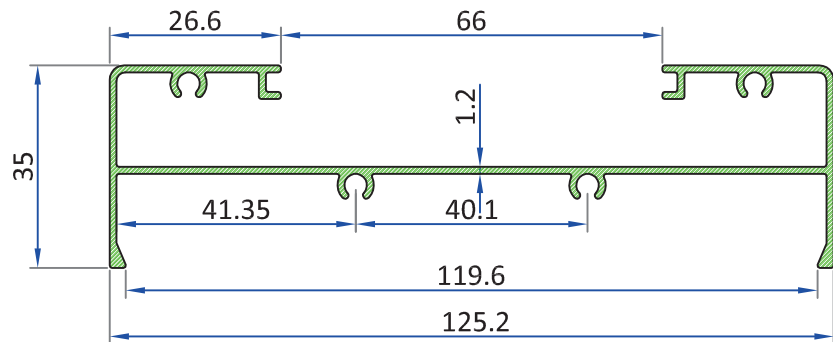


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8647   | 0.377         |

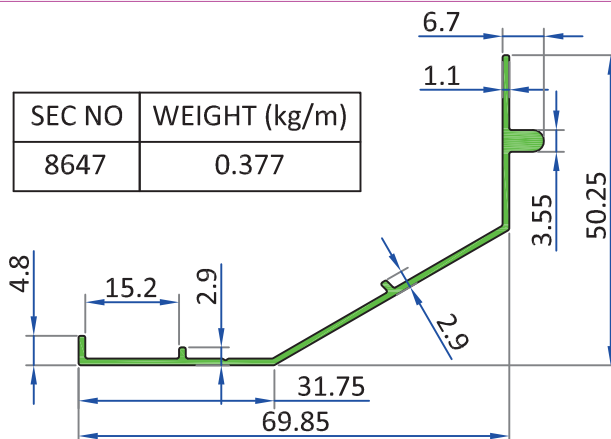


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8648   | 0.127         |



| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8649   | 0.194         |

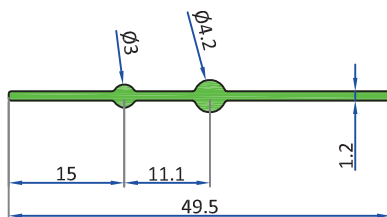

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8650   | 0.0963        |



ALL DIMENSIONS ARE IN MM







# KMC ALUMINIUM

AC GRILL


PAGE 14 - IV

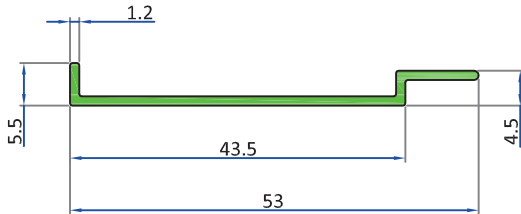


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8651   | 0.195         |

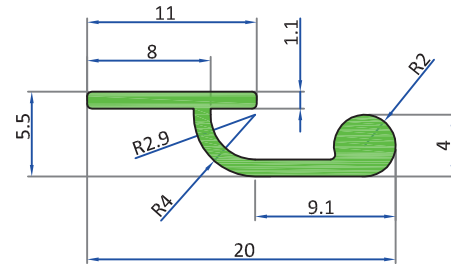


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8695   | 0.101         |

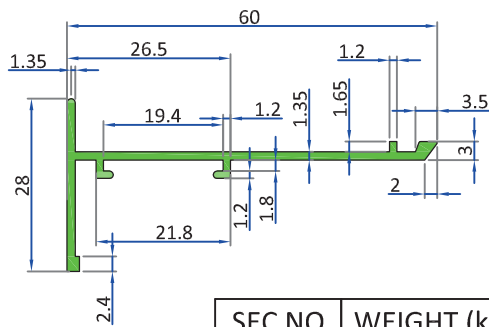


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8696   | 0.361         |

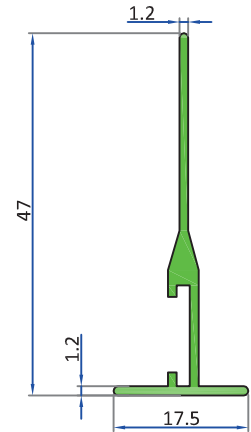


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8697   | 0.243         |

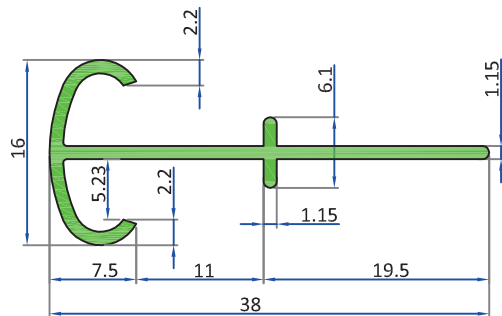


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8698   | 0.205         |

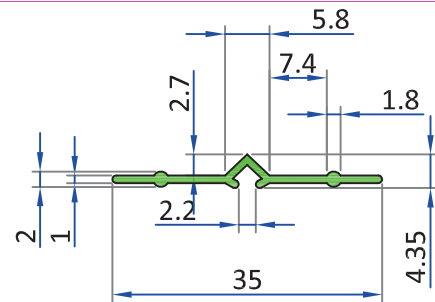

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 9046   | 0.112         |



| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 9047   | 0.074         |

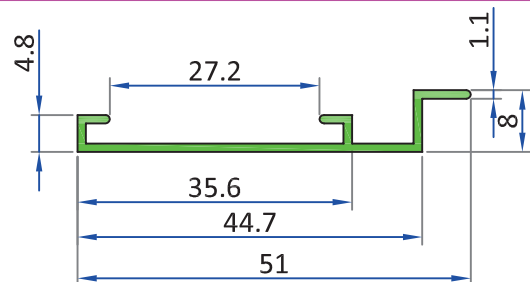

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 9048   | 0.211         |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

AC GRILL

PAGE 14 - V

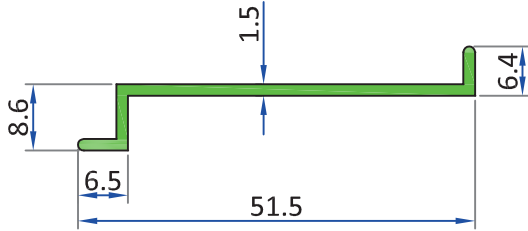

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 9049   | 0.255         |

COMMERCIAL

COMMERCIAL

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - I

## RUNNER 15MM SERIES




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2950   | 37.50 | 15.00 | 0.90 | 1.000 - 1.200 |
| 2951   | 37.50 | 15.00 | 1.10 | 1.300 - 1.500 |
| 2952   | 37.50 | 15.00 | 1.45 | 1.600 - 1.800 |

## INTER LOCK 15MM SERIES

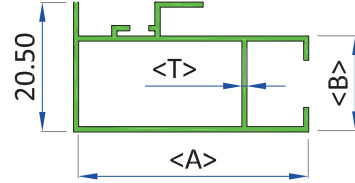


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2954   | 37.50 | 15.00 | 0.70 | 1.000 - 1.200 |
| 2955   | 37.50 | 15.00 | 0.95 | 1.300 - 1.500 |
| 2956   | 37.50 | 15.00 | 1.20 | 1.600 - 1.800 |

## TRACK 15MM SERIES




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2959   | 44.50 | 34.00 | 1.00 | 1.250 - 1.500 |
| 2960   | 44.50 | 34.00 | 1.60 | 1.700 - 1.900 |
| 2961   | 44.50 | 34.00 | 1.20 | 1.500 - 1.700 |

## ONE SIDE OPEN




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2962   | 40.00 | 18.00 | 0.85 | 1.000-1.200   |
| 2965   | 40.00 | 18.00 | 1.35 | 1.600 - 1.800 |
| 2966   | 40.00 | 18.00 | 1.50 | 1.800 - 2.000 |
| 6066   | 49.8  | 18.00 | 1.20 | 1.57-2.020    |

## INTER LOCK




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2969   | 40.00 | 18.00 | 0.90 | 1.200 - 1.400 |
| 2971   | 40.00 | 18.00 | 1.05 | 1.600 - 1.800 |
| 2972   | 40.00 | 18.00 | 1.40 | 2.000 - 2.400 |

## BOTH SIDE OPEN




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2974   | 40.00 | 18.00 | 0.90 | 1.000 - 1.200 |
| 2975   | 40.00 | 18.00 | 0.60 | 0.800 - 0.850 |
| 2977   | 40.00 | 18.00 | 1.35 | 1.600 - 1.800 |
| 2978   | 40.00 | 18.00 | 1.55 | 1.800 - 2.100 |

## TRACK SIDE

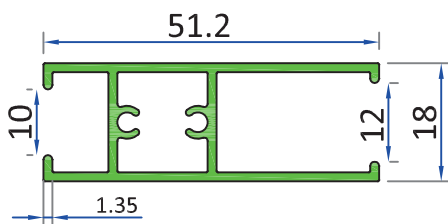

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7407   | 1.920 - 2.120 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2987   | 62.20 | 31.60 | 0.75 | 1.450 - 1.650 |
| 2988   | 62.20 | 31.60 | 0.96 | 1.800 - 2.000 |
| 2989   | 62.20 | 31.60 | 1.04 | 2.000 - 2.300 |
| 2990   | 62.20 | 31.60 | 1.20 | 2.300 - 2.500 |
| 3908   | 83.00 | 40.00 | 1.50 | 3.000 - 3.670 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - II

TWO TRACK BOTTOM




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2993   | 62.00 | 32.00 | 0.70 | 1.400 - 1.600 |
| 2994   | 62.00 | 32.00 | 0.83 | 1.900 - 2.100 |
| 2995   | 62.20 | 31.60 | 1.05 | 2.100 - 2.400 |
| 2996   | 62.20 | 31.60 | 1.16 | 2.400 - 2.800 |

TWO TRACK GUTTER BOTTOM




| SEC NO | A     | B     | T   | WT/RANGE/12'  |
|--------|-------|-------|-----|---------------|
| 2999   | 62.20 | 45.50 | 1.1 | 2.900 - 3.200 |

THREE TRACK SIDE

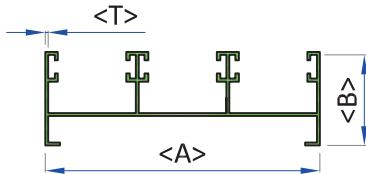


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 3002   | 92.00 | 31.60 | 1.00 | 2.500 - 2.800 |
| 3004   | 92.00 | 31.60 | 1.30 | 3.200 - 3.600 |

THREE TRACK BOTTOM

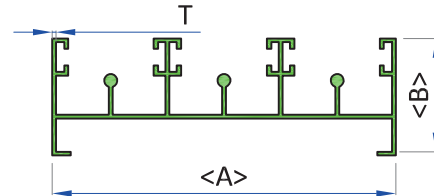


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 3008   | 92.00 | 31.60 | 1.00 | 2.900 - 3.300 |
| 3010   | 92.00 | 31.60 | 1.30 | 4.100 - 4.400 |


THREE TRACK GUTTRACK

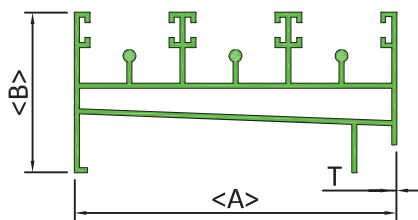

| SEC NO | A     | B    | T    | WT/RANGE/12' |
|--------|-------|------|------|--------------|
| 3013   | 92.00 | 45.5 | 1.20 | 4.500-5.000  |

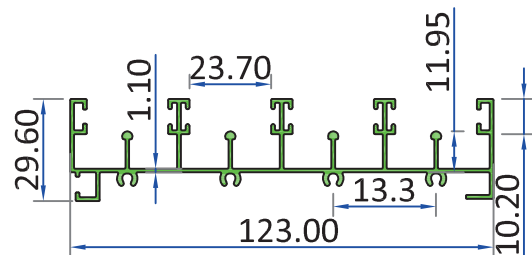


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3262   | 4.230 - 5.080 |

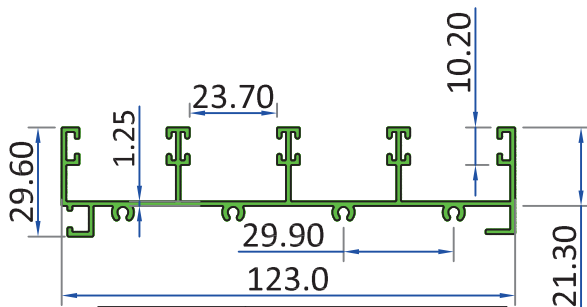

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3261   | 4.080 - 4.890 |

SHUTTER PLAIN



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 3028   | 1.410-1.722  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - III

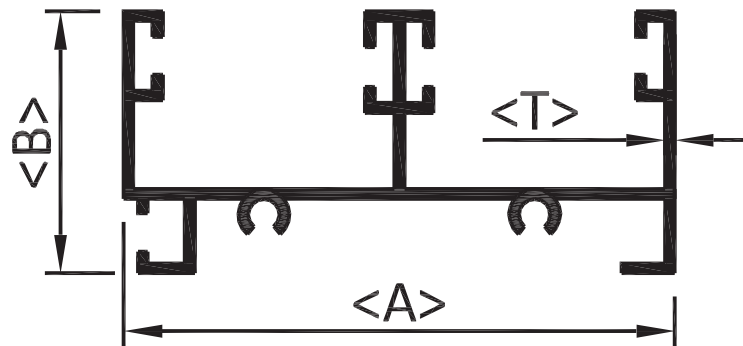

| SECNO | A     | B     | T    | WT/RANGE/12'  |
|-------|-------|-------|------|---------------|
| 3040  | 62.00 | 29.50 | 0.90 | 1.800 - 1.980 |
| 3041  | 62.00 | 29.50 | 1.18 | 2.280 - 2.500 |
| 3042  | 62.00 | 29.50 | 1.30 | 2.570 - 2.825 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


ARCHITECTURAL

PAGE 15 - IV

THREE TRACK SIDE

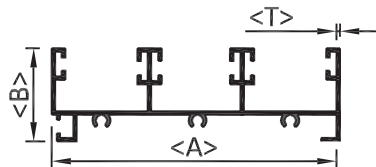


| SECNO | A     | B     | T    | WT/RANGE/12' |
|-------|-------|-------|------|--------------|
| 3048  | 92.36 | 29.70 | 1.18 | 3.140-3.840  |




| SECNO | A     | B     | T    | WT/RANGE/12'  |
|-------|-------|-------|------|---------------|
| 3043  | 62.00 | 29.50 | 0.90 | 2.100 - 2.310 |
| 3044  | 62.00 | 29.50 | 1.15 | 2.520 - 2.770 |
| 3045  | 62.00 | 29.50 | 1.30 | 2.800 - 3.080 |


THREE TRACK BOTTOM

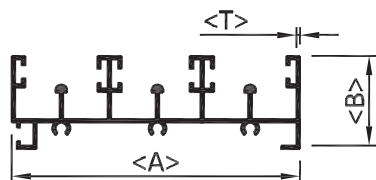


| SECNO | A     | B     | T    | WT/RANGE/12' |
|-------|-------|-------|------|--------------|
| 3050  | 92.36 | 29.70 | 1.18 | 3.640-4.500  |

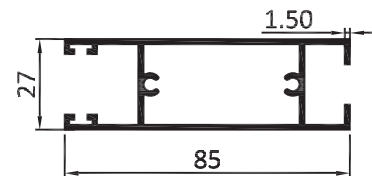


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5034   | 3.540-4.320  |

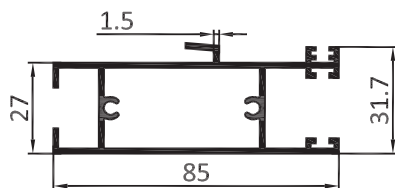

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5035   | 4.040-4.610  |

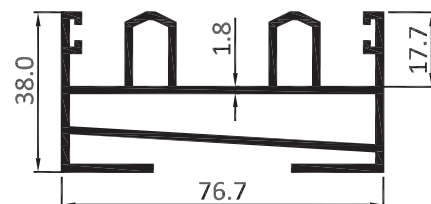

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5041   | 5.450-6.090  |

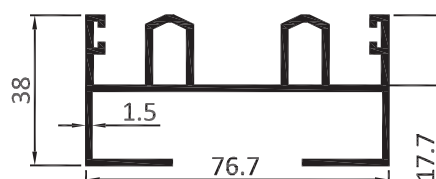

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5040   | 4.000-4.400  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - V

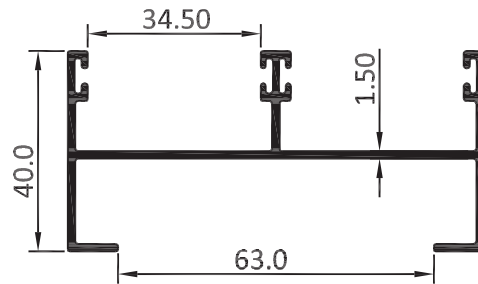


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3908   | 3.000 - 3.670 |

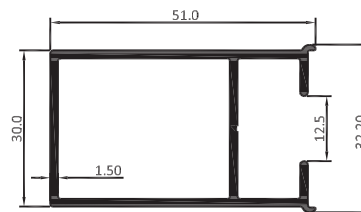


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3911   | 2.250 - 2.780 |

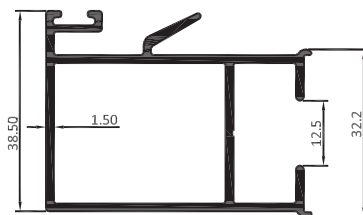

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3910   | 2.700 - 3.350 |

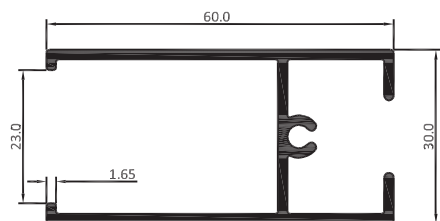

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3907   | 2.570 - 2.860 |



|      | A    | B     | T    | WT/RANGE/12' |
|------|------|-------|------|--------------|
| 3202 | 33.0 | 38.50 | 2.30 | 1.450-1.770  |
| 3204 | 33.0 | 38.50 | 3.00 | 1.780-2.170  |
| 3205 | 33.0 | 38.50 | 4.30 | 2.290-2.800  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - VI

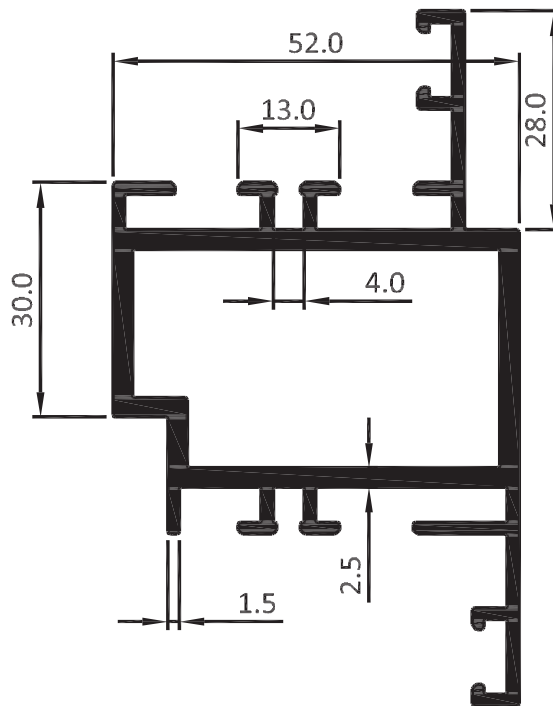

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8298   | 5.580 - 6.696 |

ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - VII

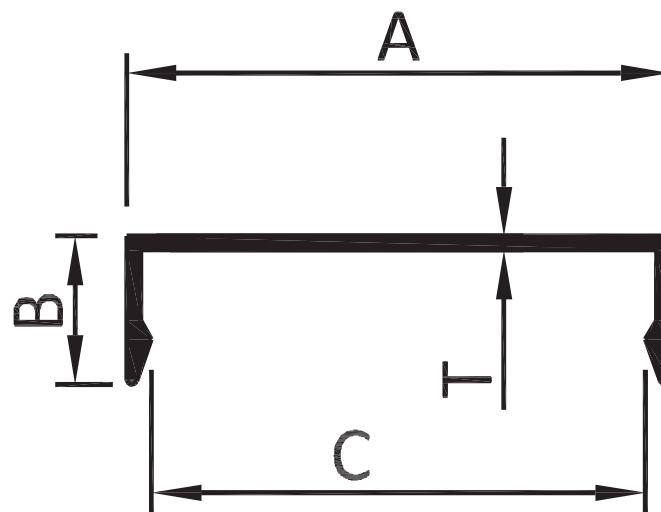

| SEC NO | A    | B    | C    | T    | WT/RANGE/12' |
|--------|------|------|------|------|--------------|
| 7073   | 55.0 | 15.0 | 50.0 | 1.80 | 1.300-1.600  |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - VIII

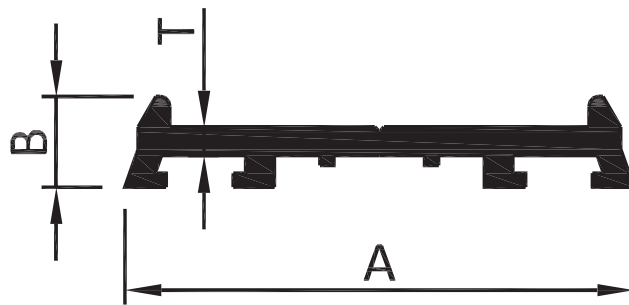

| SEC NO | A     | B   | T   | WT/RANGE/12' |
|--------|-------|-----|-----|--------------|
| 7072   | 53.45 | 9.5 | 4.0 | 2.050-2.400  |

COMMERCIAL

COMMERCIAL



ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM


ARCHITECTURAL

PAGE 15 - IX

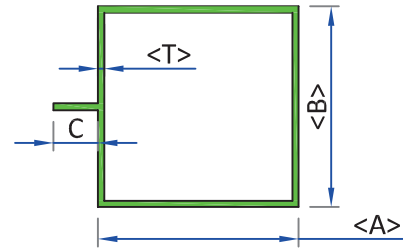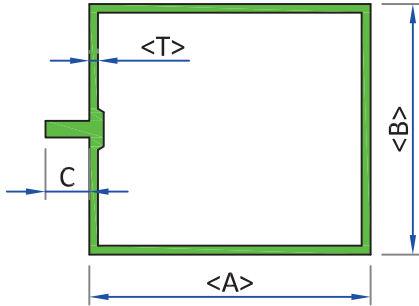


| SEC NO | A     | B     | C     | T    | WT/RANGE/12'  |
|--------|-------|-------|-------|------|---------------|
| 4591   | 45.00 | 45.00 | 10.00 | 1.40 | 2.400 - 2.800 |
| 4592   | 45.00 | 45.00 | 6.00  | 1.10 | 1.800 - 2.200 |
| 4596   | 70.00 | 58.00 | 27.00 | 2.00 | 5.150 - 5.700 |


| SEC NO | A      | B     | C     | T    | WT/RANGE/12'    |
|--------|--------|-------|-------|------|-----------------|
| 4590   | 118    | 57.00 | 18.00 | 2.00 | 6.300 - 7.300   |
| 4592   | 45.00  | 45.00 | 6.00  | 1.10 | 1.800 - 2.200   |
| 4597   | 95.00  | 57.00 | 26.00 | 2.50 | 9.100 - 9.500   |
| 4598   | 64.00  | 57.00 | 10.00 | 2.00 | 4.900 - 5.400   |
| 4599   | 100.00 | 57.00 | 10.00 | 2.00 | 6.000 - 6.500   |
| 4575   | 65.00  | 57.40 | 13.50 | 3.50 | 7.747 - 9.296   |
| 45150  | 140.00 | 57.40 | 13.50 | 3.50 | 12.415 - 14.898 |

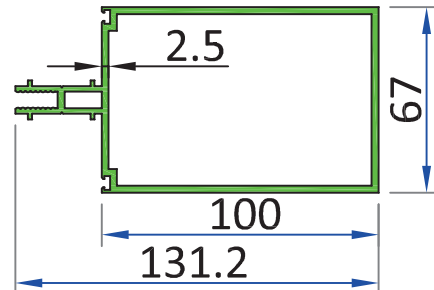


| SEC NO | A     | B     | T    | WT/RANGE/12'   |
|--------|-------|-------|------|----------------|
| 5053   | 131.2 | 67.0  | 2.50 | 9.500 - 10.000 |
| 5068   | 131.2 | 67.00 | 2.0  | 7.420 - 8.710  |

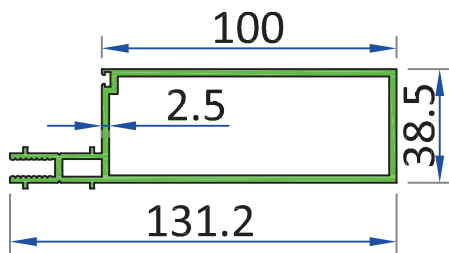


| SEC NO | A      | B     | T    | WT/RANGE/12'  |
|--------|--------|-------|------|---------------|
| 5054   | 131.16 | 38.50 | 2.50 | 8.500 - 9.000 |
| 5069   | 131.16 | 38.5  | 2.0  | 6.030 - 7.750 |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5058   | 5.100-5.300  |

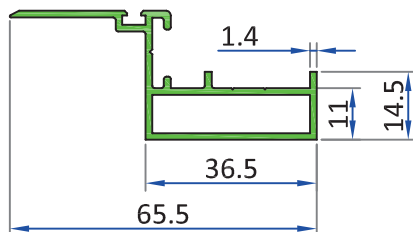

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5059   | 2.100-2.350  |

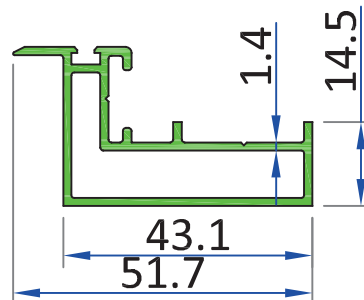

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5056   | 2.200-2.600  |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - X

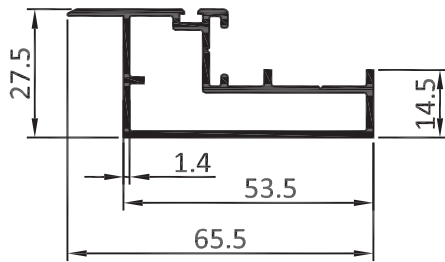


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5066   | 2.600-2.800  |

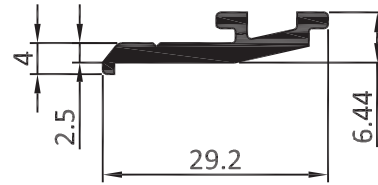


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5067   | 0.850-1.100  |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6014   | 3.120-4.000  |

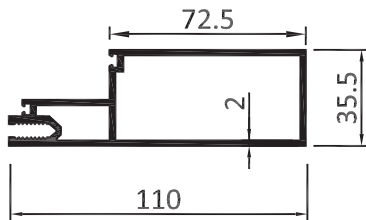

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6054   | 6.100-7.100  |

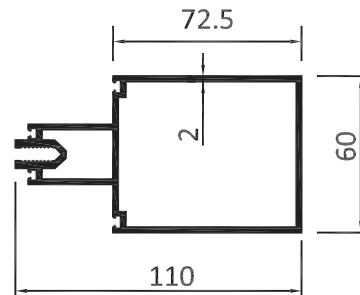

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6053   | 7.400-8.600  |

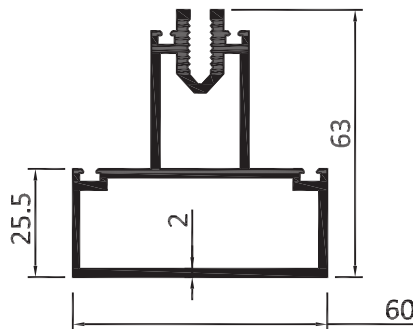

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6056   | 5.400-6.600  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XI

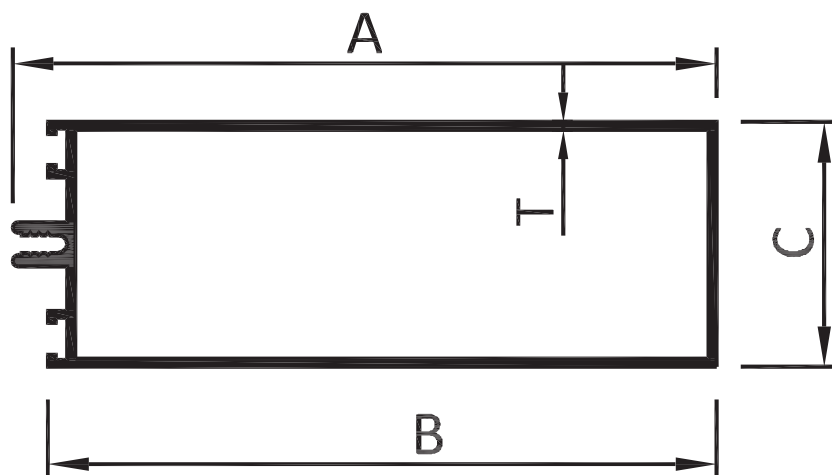

| SEC NO | A      | B      | C     | T   | WT/RANGE/12'  |
|--------|--------|--------|-------|-----|---------------|
| 6229   | 158.25 | 150.25 | 55.00 | 1.8 | 7.400-8.800   |
| 6230   | 158.25 | 150.25 | 55.00 | 2.8 | 11.000-12.700 |

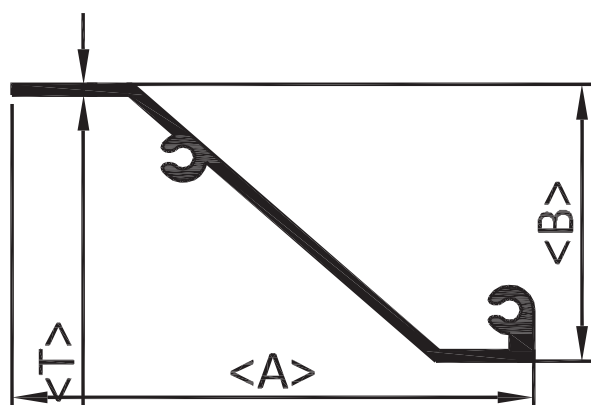


| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 4651   | 64.00 | 34.00 | 1.30 | 1.100-1.300  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XII

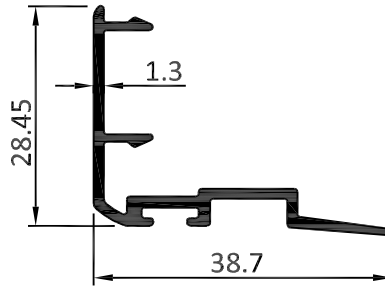

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 9004   | 1.050-1.220  |

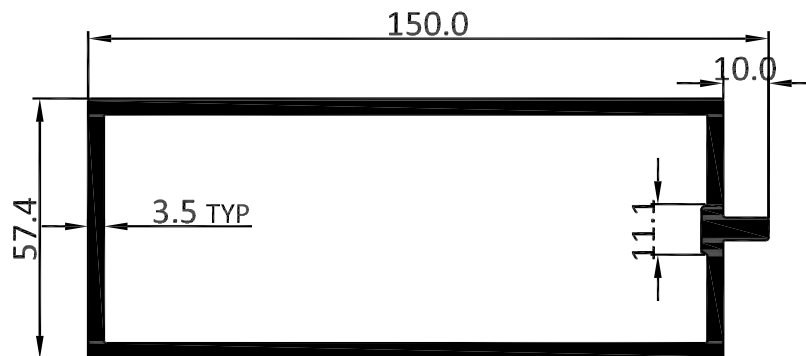

| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 45150  | 12.415- 14.898 |

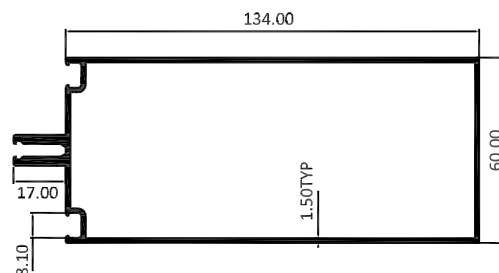


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8995   | 6.136 - 7.364 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XIII

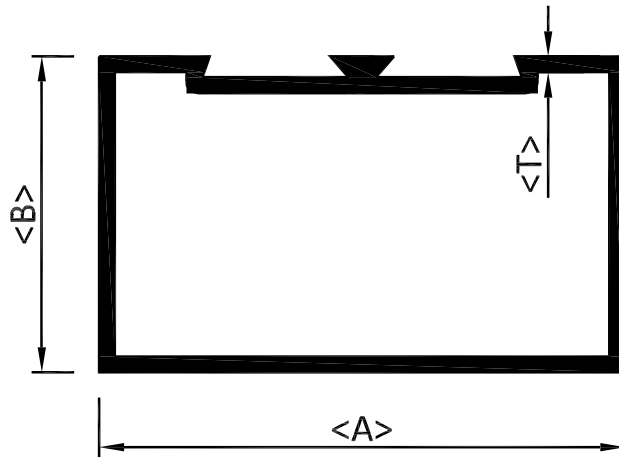


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2603   | 48    | 24    | 0.60 | 0.925 - 1.130 |
| 2604   | 50.8  | 25.40 | 0.90 | 1.380 - 1.680 |
| 2605   | 50.8  | 25.40 | 1.30 | 1.910 - 2.290 |
| 2617   | 63.50 | 38.10 | 0.66 | 1.400 - 1.600 |
| 2618   | 63.50 | 38.10 | 0.77 | 1.600 - 1.800 |
| 2619   | 63.50 | 38.10 | 0.87 | 1.800 - 2.000 |
| 2620   | 63.50 | 38.10 | 0.97 | 2.000 - 2.200 |
| 2621   | 63.50 | 38.10 | 1.07 | 2.200 - 2.400 |
| 2622   | 63.50 | 38.10 | 1.18 | 2.400 - 2.600 |
| 2623   | 63.50 | 38.10 | 1.28 | 2.600 - 2.800 |
| 2624   | 63.50 | 38.10 | 1.38 | 2.800 - 3.000 |
| 2625   | 63.50 | 38.10 | 1.49 | 3.000 - 3.200 |
| 2626   | 63.50 | 38.10 | 1.59 | 3.200 - 3.400 |
| 2627   | 63.50 | 38.10 | 1.66 | 3.400 - 3.600 |
| 2628   | 63.50 | 38.10 | 1.76 | 3.600 - 3.800 |
| 2629   | 63.50 | 38.10 | 1.87 | 3.800 - 4.000 |
| 2659   | 101.6 | 44.45 | 1.25 | 3.370 - 4.120 |
| 2661   | 101.6 | 44.45 | 1.65 | 4.380 - 5.350 |
| 2664   | 101.6 | 44.45 | 1.95 | 5.410-5.955   |
| 2666   | 101.6 | 44.45 | 2.20 | 6.070 - 6.675 |
| 2668   | 101.6 | 44.45 | 2.45 | 6.715 - 7.385 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XIV

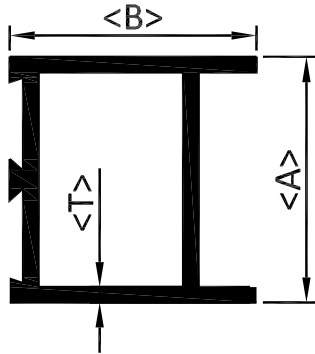


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2701   | 47.00 | 44.40 | 1.00 | 2.000 - 2.300 |
| 2703   | 44.50 | 47.00 | 1.40 | 2.600 - 2.900 |
| 2705   | 47.00 | 44.40 | 1.70 | 3.500 - 4.000 |
| 2707   | 47.00 | 44.40 | 2.50 | 4.500 - 4.900 |

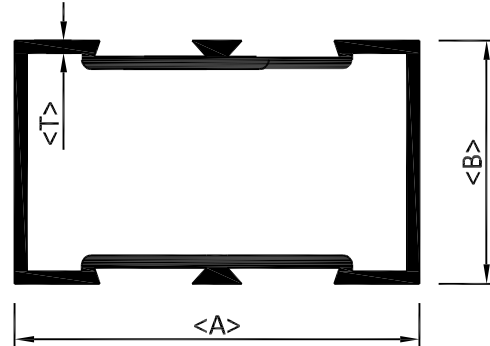


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2610   | 48.00 | 24.00 | 0.55 | 1.030-1.260   |
| 2611   | 50.8  | 24.40 | 0.70 | 1.300-1.510   |
| 2633   | 63.50 | 38.10 | 0.57 | 1.600 - 1.800 |
| 2634   | 63.50 | 38.10 | 0.77 | 1.800 - 2.000 |
| 2635   | 63.50 | 38.10 | 0.87 | 2.000 - 2.200 |
| 2636   | 63.50 | 38.10 | 0.97 | 2.200 - 2.400 |
| 2637   | 63.50 | 38.10 | 1.07 | 2.400 - 2.600 |
| 2638   | 63.50 | 38.10 | 1.17 | 2.600 - 2.800 |
| 2639   | 63.50 | 38.10 | 1.27 | 2.800 - 3.000 |
| 2640   | 63.50 | 38.10 | 1.37 | 3.000 - 3.200 |
| 2641   | 63.50 | 38.10 | 1.47 | 3.200 - 3.400 |
| 2642   | 63.50 | 38.10 | 1.57 | 3.400 - 3.600 |
| 2643   | 63.50 | 38.10 | 1.68 | 3.600 - 3.800 |
| 2645   | 63.50 | 38.10 | 1.78 | 3.800 - 4.000 |
| 2672   | 101.6 | 44.45 | 1.30 | 3.885 - 4.270 |
| 2674   | 101.6 | 44.45 | 1.45 | 4.290 - 4.720 |
| 2676   | 101.6 | 44.45 | 1.62 | 4.750 - 5.225 |
| 2678   | 101.6 | 44.45 | 1.85 | 5.360 - 5.895 |
| 2680   | 101.6 | 44.45 | 2.1  | 6.025 - 6.625 |
| 5043   | 63.50 | 38.10 | 1.70 | 3.380-4.130   |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2730   | 47.00 | 44.45 | 1.00 | 2.000 - 2.400 |
| 2732   | 47.00 | 44.45 | 1.50 | 2.600 - 3.000 |
| 2737   | 83.50 | 44.45 | 1.50 | 3.900 - 4.300 |



| SEC NO | A     | B     | T    | WT/RANGE/7'   |
|--------|-------|-------|------|---------------|
| 2711   | 47.50 | 44.45 | 0.95 | 1.000 - 1.200 |
| 2712   | 47.50 | 44.45 | 1.20 | 1.300 - 1.500 |
| 2714   | 47.50 | 44.45 | 1.45 | 1.600 - 1.800 |
| 2717   | 47.50 | 44.45 | 1.70 | 1.800 - 2.000 |
| 2718   | 47.50 | 44.45 | 2.00 | 2.000 - 2.400 |
| 2719   | 85.00 | 44.45 | 1.00 | 2.600 - 2.900 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2742   | 47.00 | 44.45 | 0.83 | 2.200 - 2.300 |
| 2744   | 47.00 | 44.45 | 1.20 | 2.600 - 2.900 |
| 2749   | 47.00 | 44.45 | 2.60 | 4.500 - 5.000 |
| 2752   | 83.50 | 44.45 | 1.40 | 3.900 - 4.300 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL







# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XV

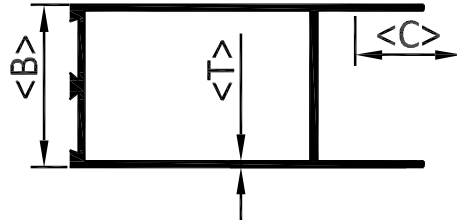

| SEC NO | A      | B     | C     | T    | WT/RANGE/12'  |
|--------|--------|-------|-------|------|---------------|
| 2755   | 95.25  | 44.45 | 25.40 | 0.85 | 2.400 - 2.700 |
| 2756   | 95.25  | 44.45 | 25.40 | 1.00 | 3.000 - 3.500 |
| 2757   | 95.25  | 44.45 | 25.40 | 1.25 | 3.500 - 3.900 |
| 2762   | 95.25  | 44.45 | 25.40 | 2.00 | 5.500 - 6.000 |
| 2767   | 114.00 | 44.45 | 25.40 | 1.35 | 3.800 - 4.200 |
| 2770   | 114.00 | 44.45 | 25.40 | 2.10 | 7.000 - 7.400 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2800   | 19.61 | 17.47 | 0.40 | 0.210-0.250   |
| 2801   | 19.61 | 17.47 | 0.47 | 0.250-0.300   |
| 2802   | 19.60 | 17.47 | 1.00 | 0.295 - 0.340 |
| 2803   | 19.60 | 17.47 | 1.35 | 0.340 - 0.395 |
| 2804   | 19.60 | 17.47 | 1.50 | 0.395 - 0.440 |

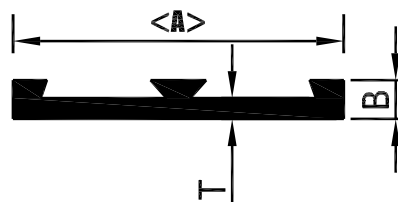

| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 2789   | 44.00 | 3.40 | 0.45 | 0.420 - 0.505 |
| 2790   | 44.00 | 3.40 | 0.80 | 0.580 - 0.650 |
| 2791   | 44.00 | 3.40 | 1.00 | 0.690 - 0.790 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XVI



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2203 L | 25.40 | 25.40 | 0.40 | 0.245-0.295   |
| 2203   | 25.40 | 25.40 | 0.53 | 0.300-0.370   |
| 2204   | 25.40 | 25.40 | 0.85 | 0.375 - 0.425 |
| 2207   | 25.40 | 25.40 | 1.00 | 0.475 - 0.575 |
| 2211   | 25.40 | 25.40 | 1.35 | 0.650 - 0.750 |
| 2224   | 32.00 | 32.00 | 1.45 | 0.950 - 1.120 |
| 2240   | 38.00 | 25.00 | 1.30 | 0.800 - 0.900 |
| 2241   | 38.00 | 25.00 | 1.45 | 0.950 - 1.100 |
| 2242   | 38.00 | 38.00 | 1.20 | 0.950 - 1.250 |
| 2243   | 38.00 | 38.00 | 1.60 | 1.140 - 1.400 |
| 2245   | 50.00 | 38.00 | 1.40 | 1.300 - 1.550 |



| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 6003   | 38.45 | 17.84 | 1.17 | 0.775-0.975  |



| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 6004   | 33.00 | 26.60 | 1.60 | 1.000-1.200  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XVII

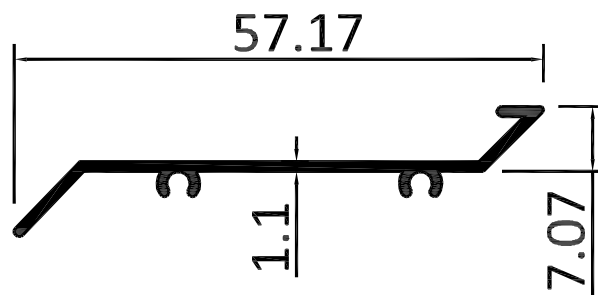

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6047   | 0.750-0.910  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XVIII

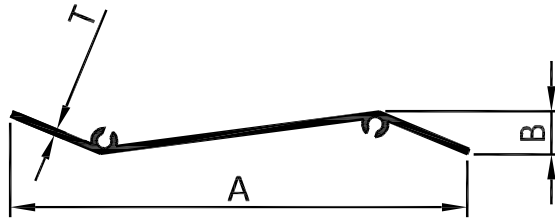

| SEC NO | A      | B     | T    | WT/RANGE/12' |
|--------|--------|-------|------|--------------|
| 4650   | 116.80 | 15.50 | 1.80 | 2.400-2.670  |
| 4650/L | 116.80 | 15.50 | 1.50 | 1.900-2.100  |

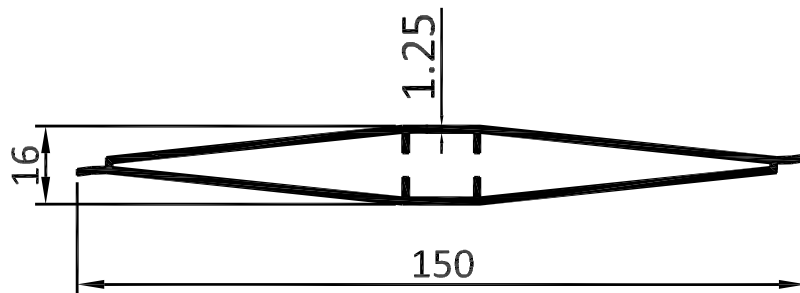

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6011   | 3.500-4.100  |

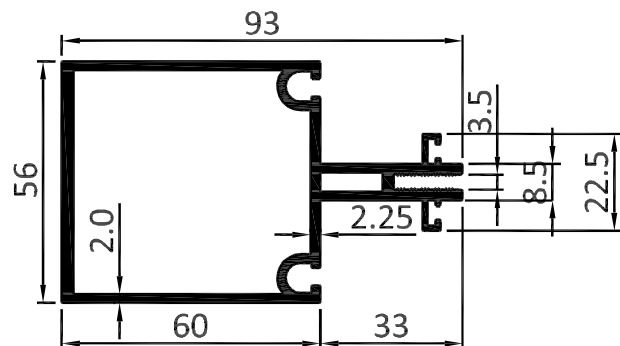

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8134   | 6.470 - 7.770 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XIX

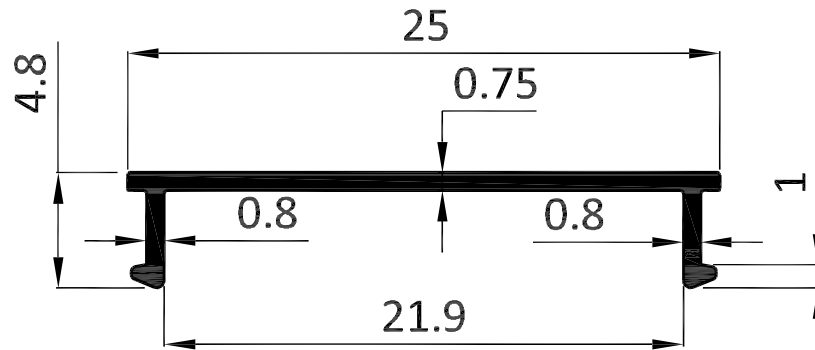

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K6475  | 0.070       |




| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 7060   | 67.00 | 81.40 | 2.00 | 5.300-6.500  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XX

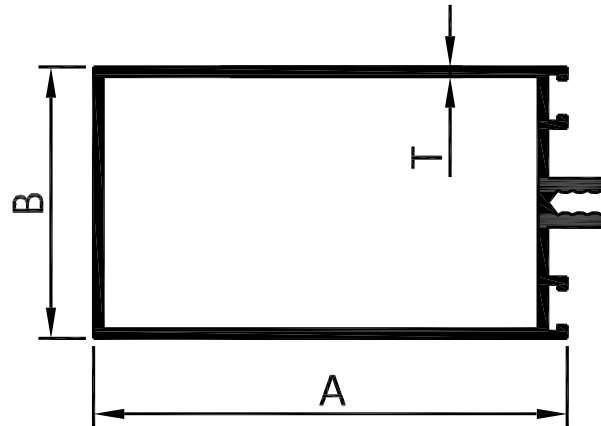

| SEC NO | A    | B    | T   | WT/RANGE/12' |
|--------|------|------|-----|--------------|
| 7071   | 96.0 | 55.0 | 2.0 | 6.350-7.000  |

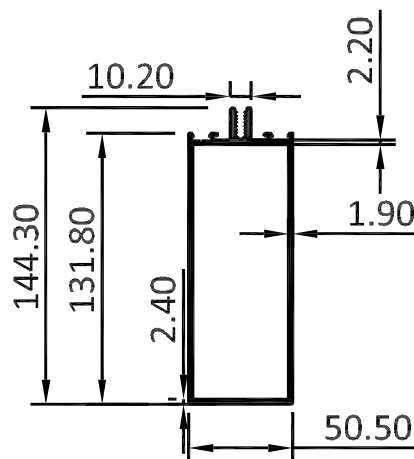

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7105   | 7.500-8.500  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM


ARCHITECTURAL

PAGE 15 - XXI

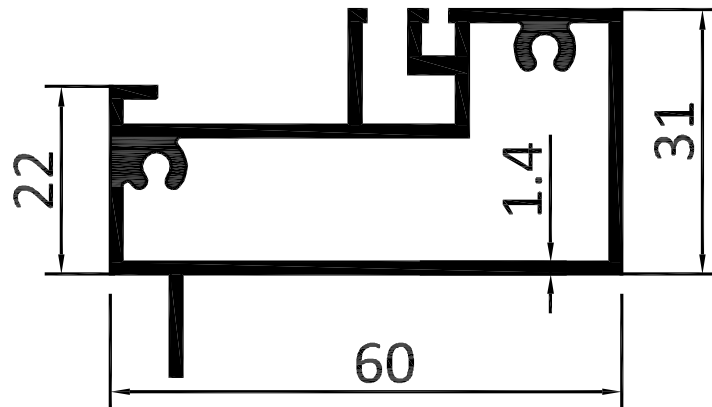

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8055   | 3.125-4.150  |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XXII

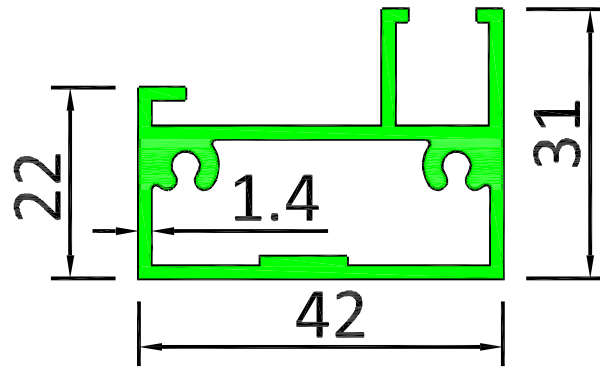


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8056   | 2.500-3.200  |

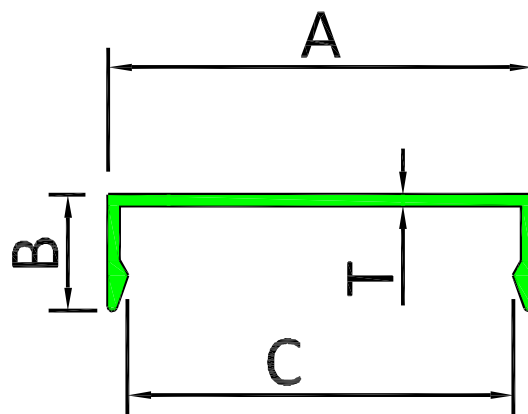

| SEC NO | A    | B    | C    | T    | WT/RANGE/12' |
|--------|------|------|------|------|--------------|
| 7073   | 55.0 | 15.0 | 50.0 | 1.80 | 1.300-1.600  |

ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XXIII

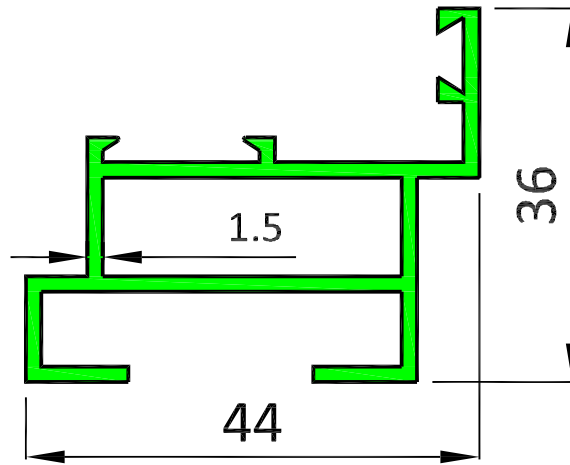


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5031   | 2.100-2.400  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XXIV



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 5038   | 0.580 - 0.680 |

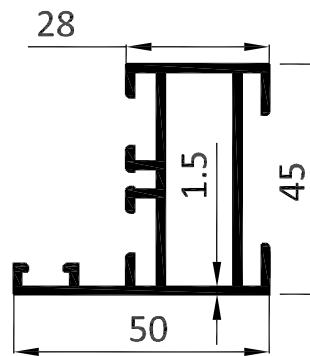

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5047   | 3.100-3.400  |

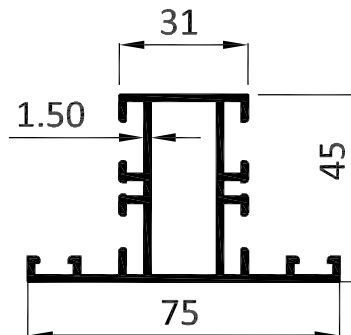


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5048   | 3.850-4.150  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XXV




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5057   | 2.600-2.800  |




| SEC NO | A     | B    | T   | WT/RANGE/12'  |
|--------|-------|------|-----|---------------|
| 3903   | 25.00 | 26.0 | 1.5 | 1.200 - 1.350 |
| 5052   | 25.00 | 26.0 | 1.5 | 1.200 - 1.350 |

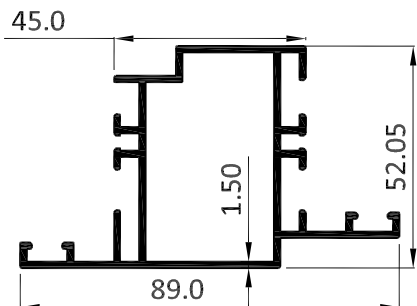


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3901   | 4.150 - 5.150 |

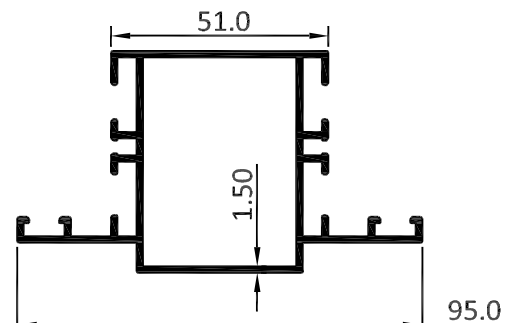

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3904   | 4.350 - 5.300 |

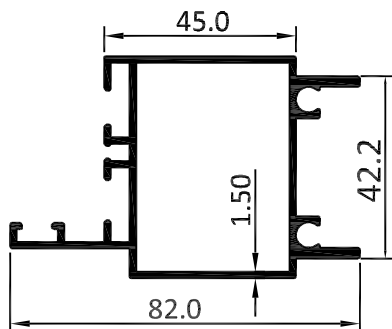

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3905   | 4.200 - 5.200 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3906   | 1.000 - 1.175 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XXVI

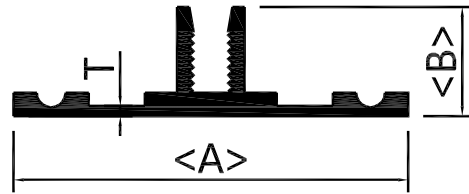

| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 1538   | 49.20 | 13.60 | 1.25 | 1.400-1.600  |

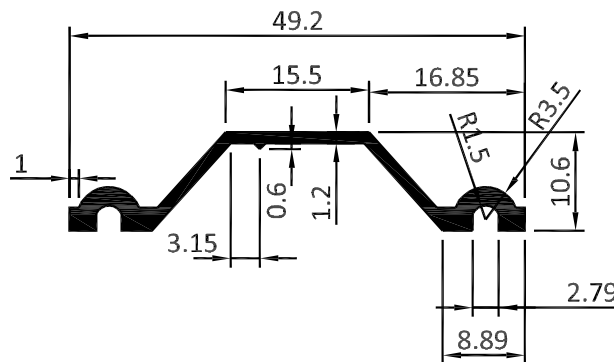

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 1539   | 0.890-1.060  |

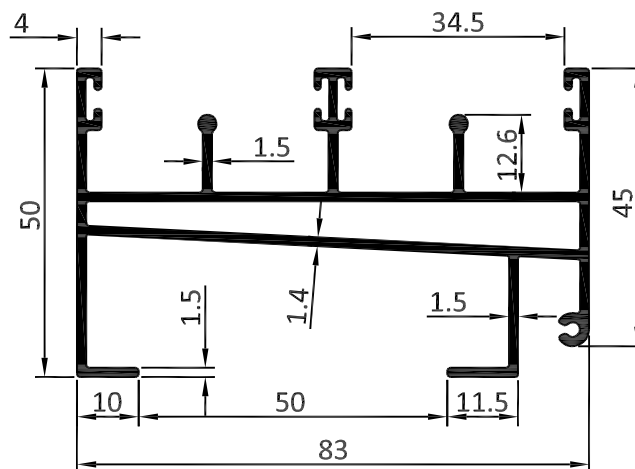


| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 3909   | 1.481         |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XXVII

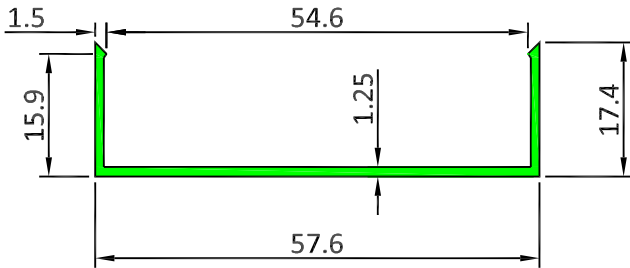


| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 4601   | 0.286         |

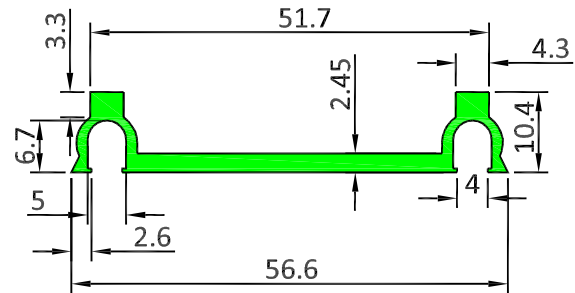

| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 4602   | 0.456         |

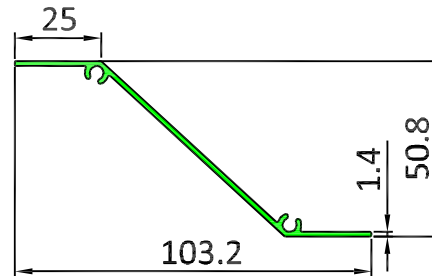

| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 4652   | 0.524         |

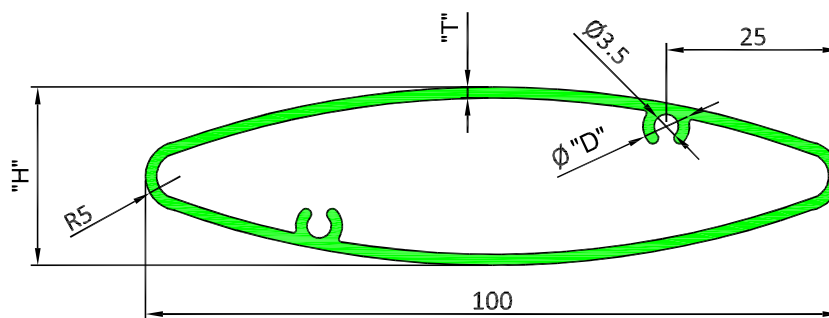

| SEC NO | WEIGHT kg/m | "T"  | "H"  | "D" |
|--------|-------------|------|------|-----|
| 7028   | 0.984       | 1.60 | 25.7 | 6.7 |
| K7027  | 0.914       | 1.45 | 25.8 | 6.5 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XXVIII

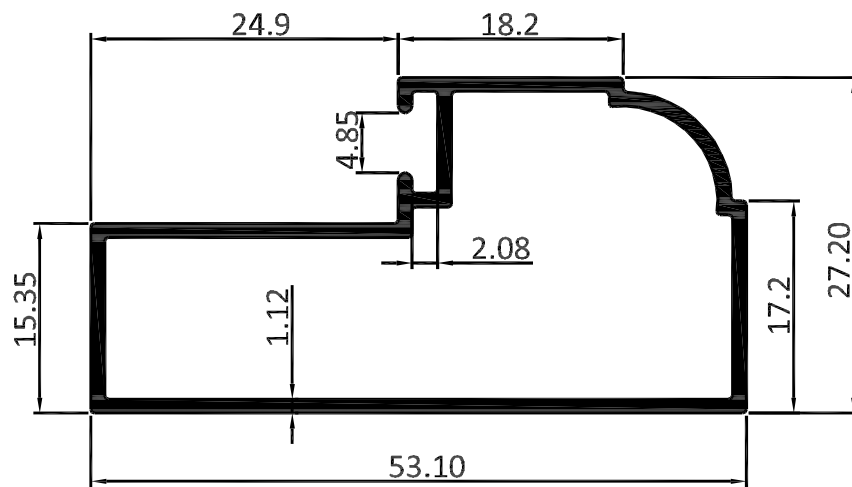


| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 8217   | 0.481         |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XXIX

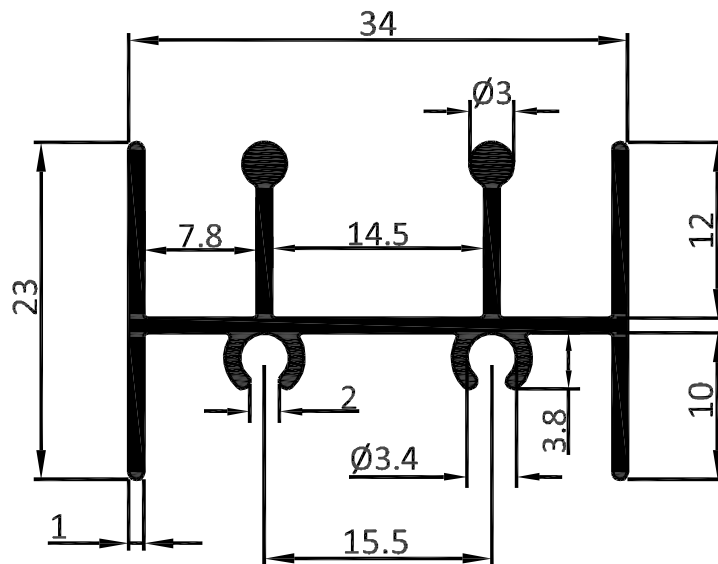

| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 8632   | 0.342         |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

ARCHITECTURAL


PAGE 15 - XXX

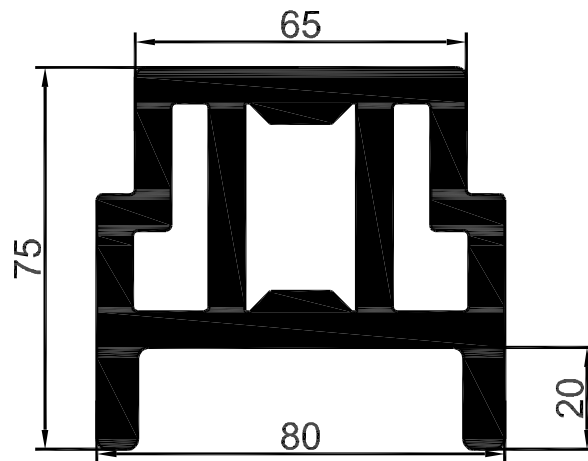

| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 8967   | 7.328         |

ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM

ARCHITECTURAL

PAGE 15 - XXXI

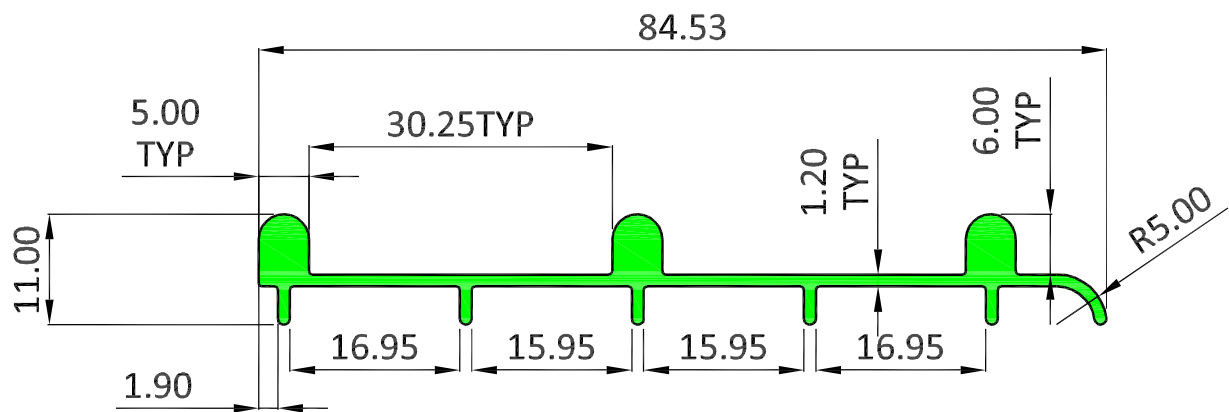


| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| K6965  | 0.563         |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM



ARCHITECTURAL


PAGE 15 - XXXII

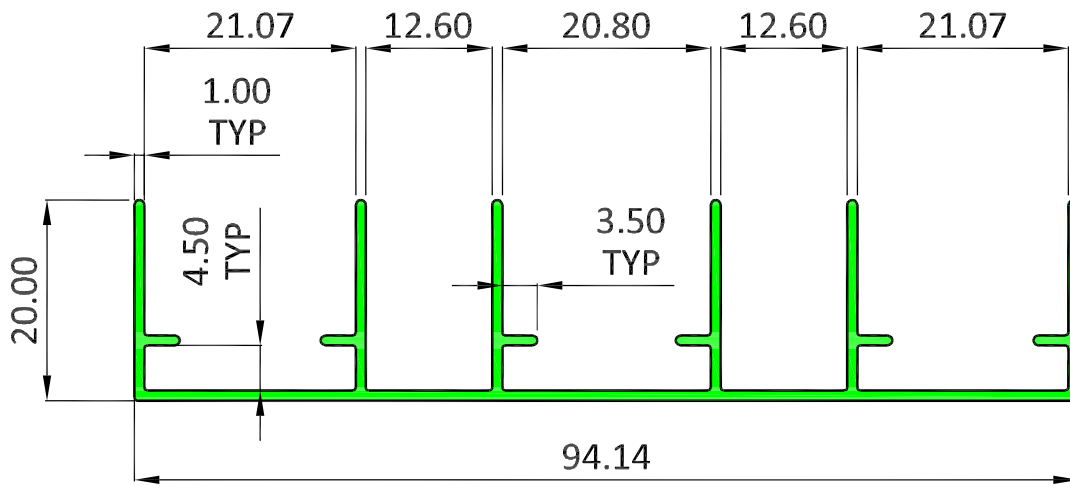


| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| K6966  | 0.619         |

ALL DIMENSIONS ARE IN MM




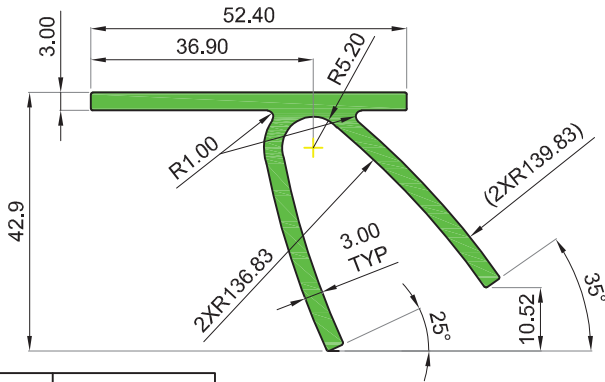


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7026  | 1.105       |

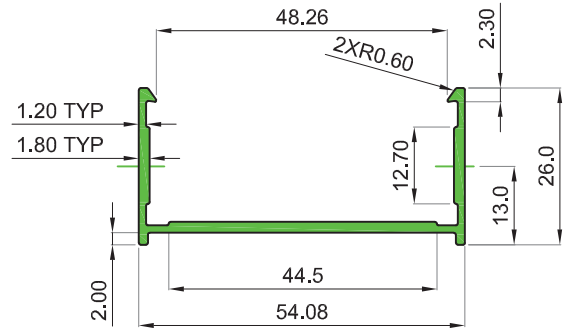


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7022  | 0.467       |

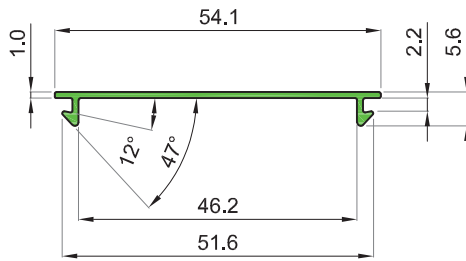


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7023  | 0.183       |

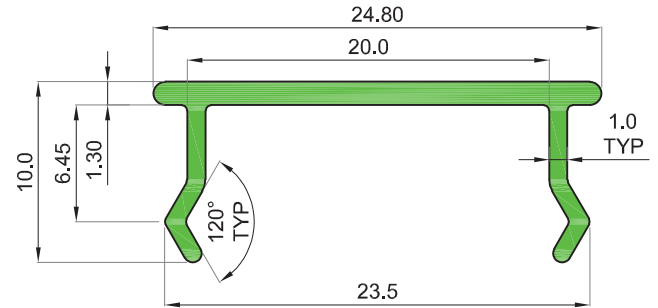


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7025  | 0.136       |

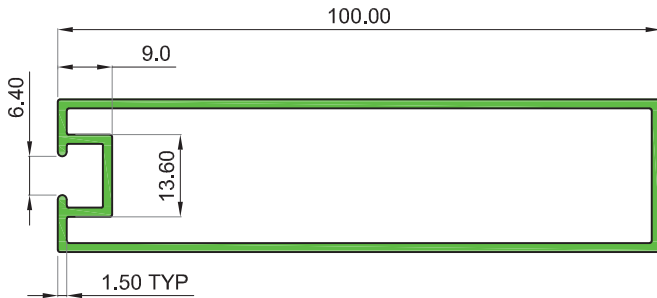


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7024  | 1.070       |

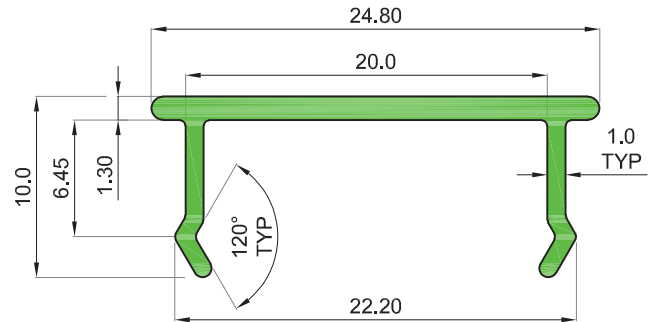

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7025  | 0.136       |

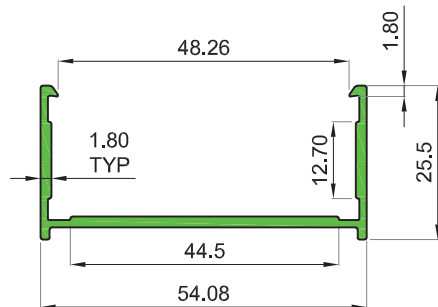

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7022  | 0.467       |

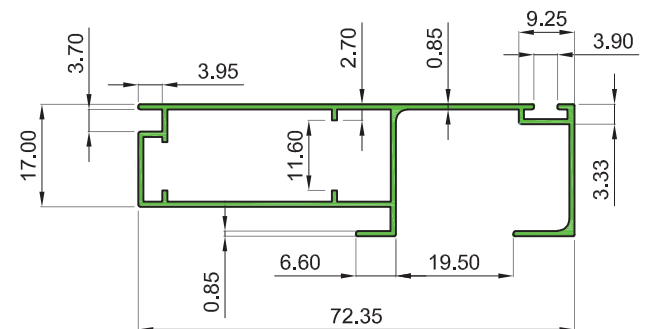

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7449  | 0.472       |


COMMERCIAL

COMMERCIAL




ARCHITECTURAL

PAGE - 15 - XXXV

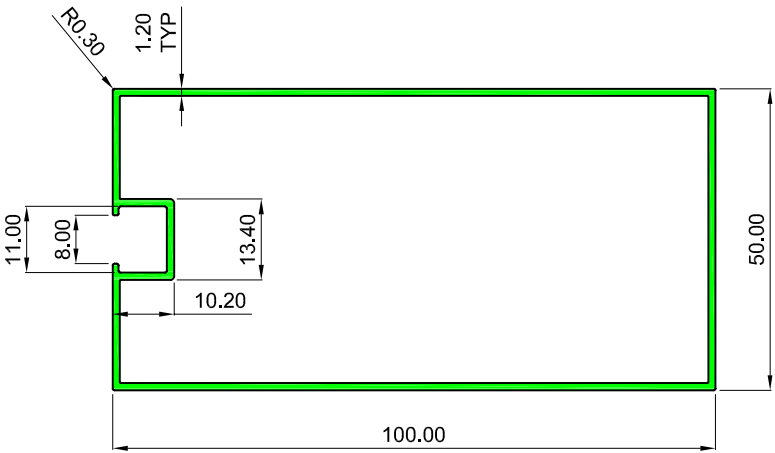

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7275  | 1.02        |

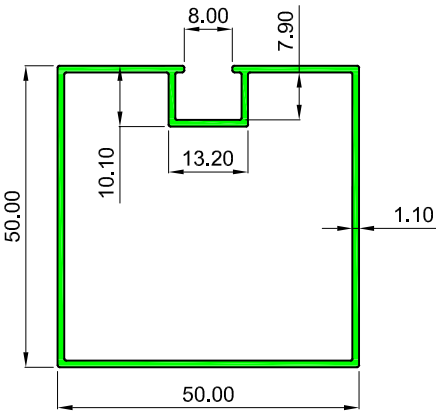





| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7279  | 0.643       |

COMMERCIAL

COMMERCIAL



PAGE 16 - I



ALL DIMENSIONS ARE IN MM

## COMMERCIAL


## COMMERCIAL




# KMC ALUMINIUM

AUTOMOBILE

PAGE 16 - II

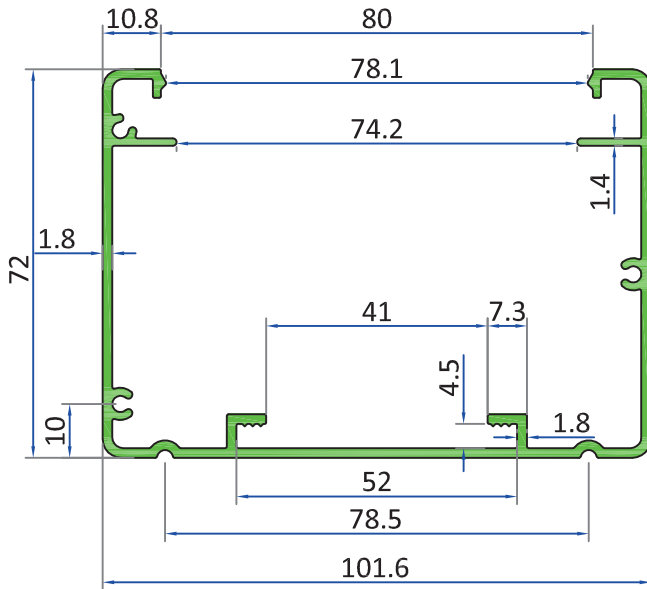

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8933   | 1.582           |

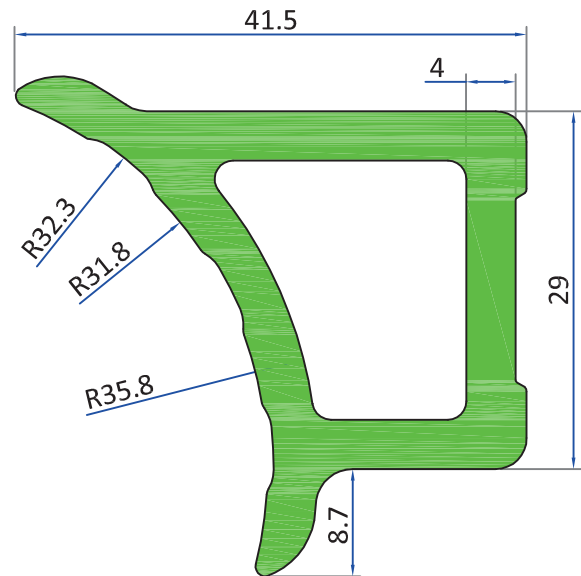


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 9088   | 1.240           |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - I

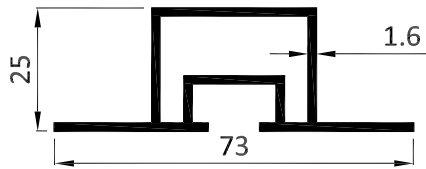


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5070   | 2.700-3.100  |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5071   | 2.450-2.850  |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6109   | 3.600-3.900  |

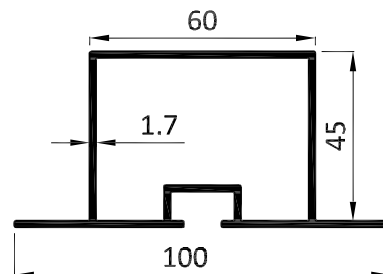

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6159   | 4.500-5.000  |

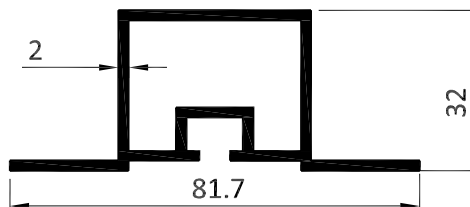

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7093   | 3.550-4.330  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7095   | 3.250-3.750  |

COMMERCIAL

COMMERCIAL

ALL DIMENSIONS ARE IN MM







# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - II




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7094   | 3.840-4.200  |

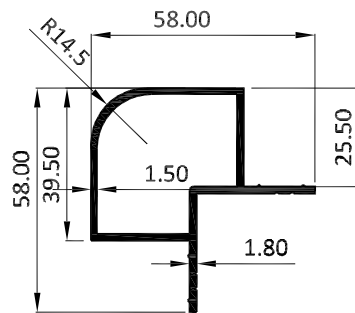


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8775   | 2.753-3.304  |

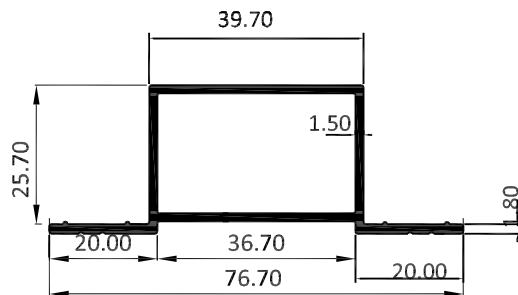

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8776   | 2.305-2.766  |

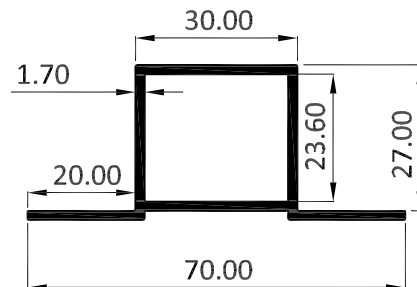

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8793   | 2.276-2.731  |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8794   | 2.015-2.419  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - III

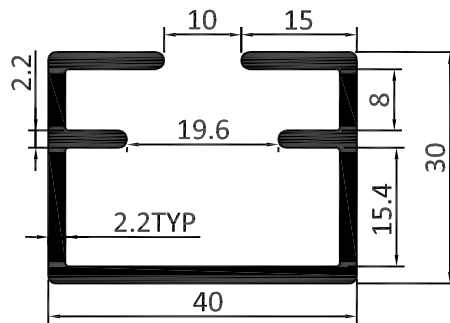

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8892   | 2.661 - 3.193 |

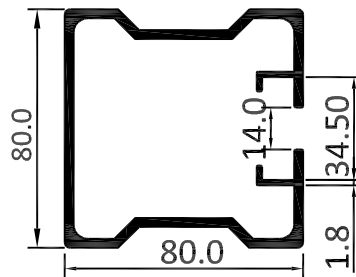

| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 6553   | 9.200 - 10.500 |

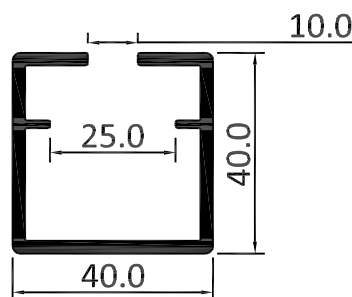


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6554   | 3.300 - 3.800 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - IV




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6555   | 5.450 - 6.300 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6558   | 3.850 - 4.200 |

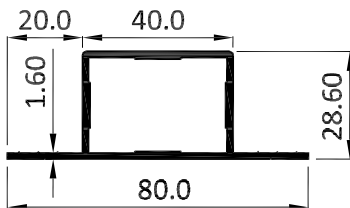


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6556   | 2.600 - 3.180 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6559   | 3.350 - 3.700 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6557   | 3.100 - 3.450 |

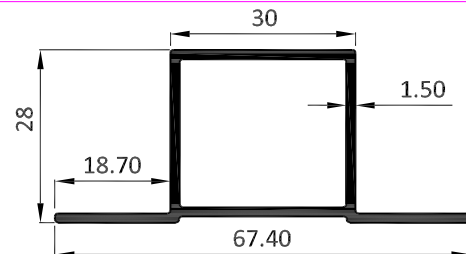

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8151   | 1.950 - 2.410 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8152   | 2.010 - 2.490 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - V

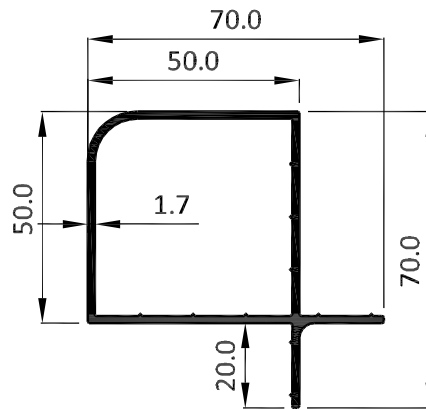

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8612   | 3.501 - 4.201 |

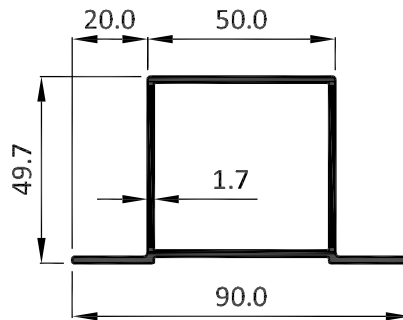

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8613   | 0.960 - 1.152 |

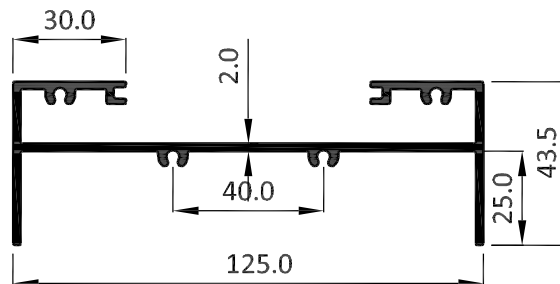


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8614   | 5.504 - 6.605 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - VI

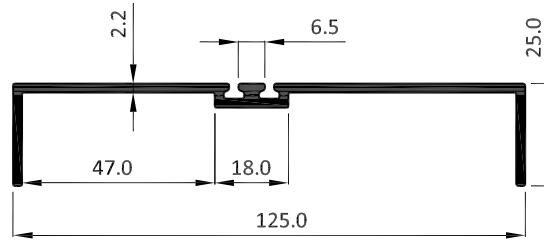


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8615   | 3.332 - 3.984 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 9103   | 3.281 - 3.935 |

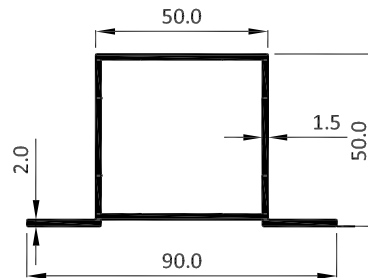

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 9104   | 3.304 - 3.965 |

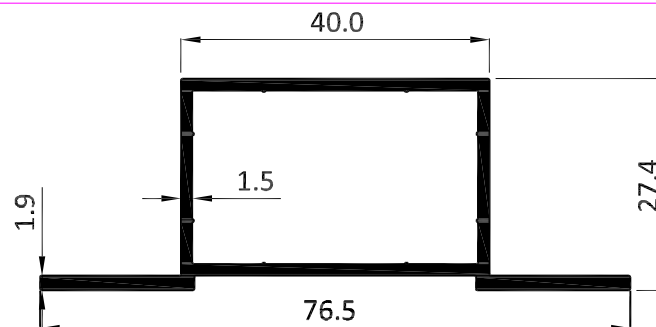

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 9105   | 2.346 - 2.815 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - VII

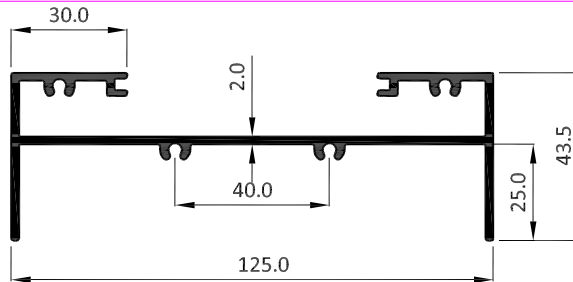


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8614   | 5.504 - 6.605 |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6536   | 0.579           |

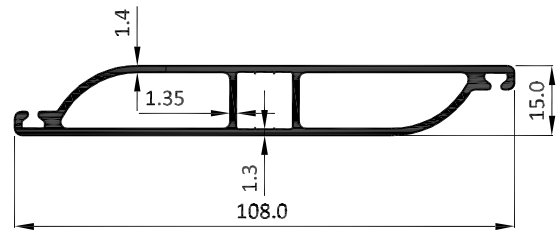


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8616   | 3.228 - 3.873 |

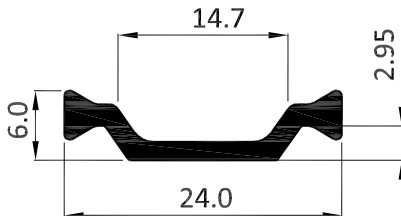

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6537   | 0.149           |

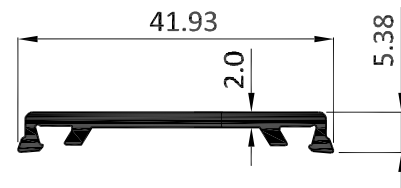

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6539   | 0.278           |

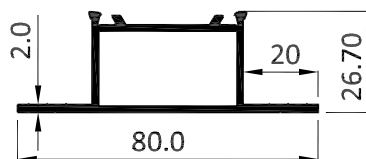


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6540   | 0.805           |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK

PAGE 17 - VIII

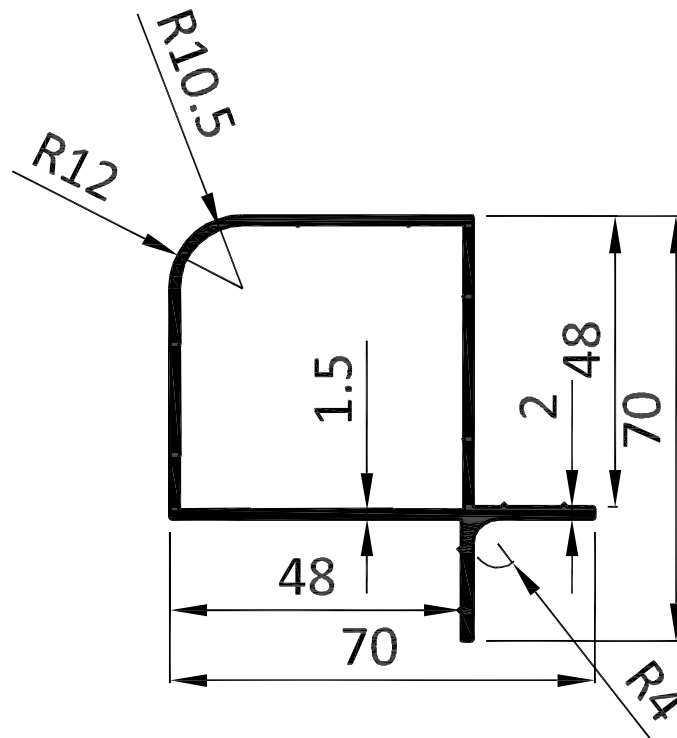

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 9103   | 0.995           |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

HVAC , AHU & THERMAL BREAK


PAGE 17 - IX

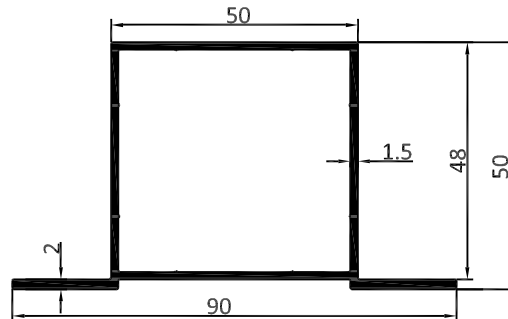

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 9104   | 1.003           |

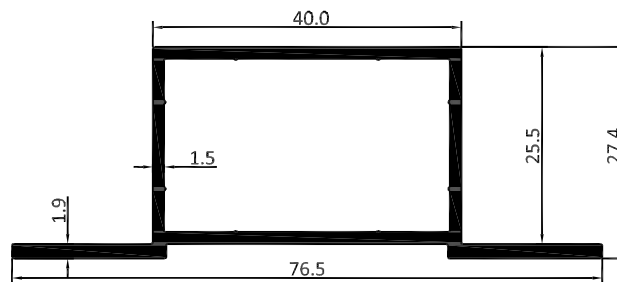

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 9105   | 0.712           |

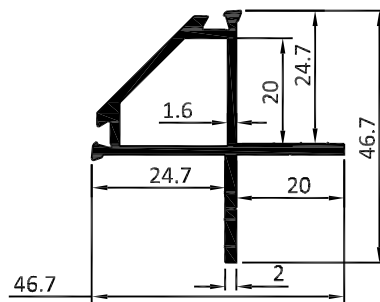

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6538   | 0.640           |

ALL DIMENSIONS ARE IN MM


COMMERCIAL

COMMERCIAL





PAGE 17 - X



|        |             |
|--------|-------------|
| SEC NO | WEIGHT kg/m |
| K7568  | 1.576       |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

LADDER


PAGE 18 - I




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8156   | 3.485 - 4.180 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 9022   | 1.770 - 2.165 |

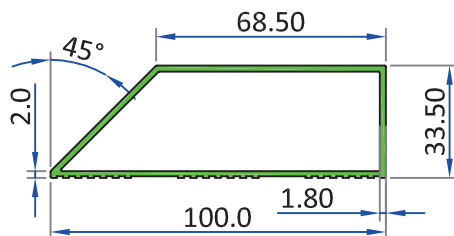


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5065   | 3.710-4.640  |

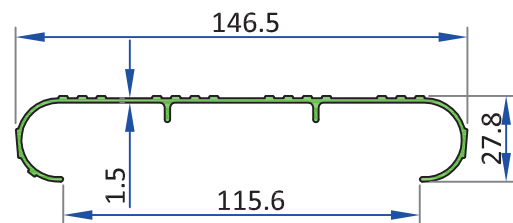


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6528   | 3.200 - 3.950 |

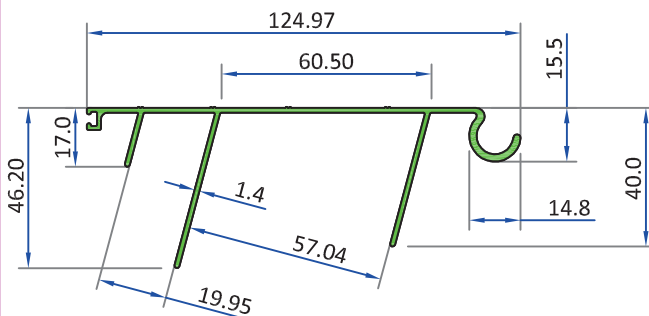


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7175   | 3.200-4.200  |

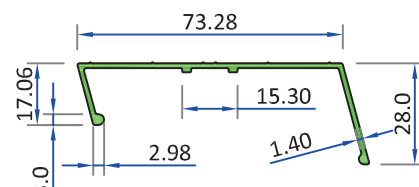

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7178   | 1.500-2.000  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 3079   | 2.990-3.310  |

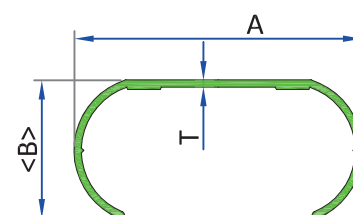

| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2410   | 66.60 | 32.00 | 1.50 | 1.800 - 2.000 |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

LADDER


PAGE 18 - II

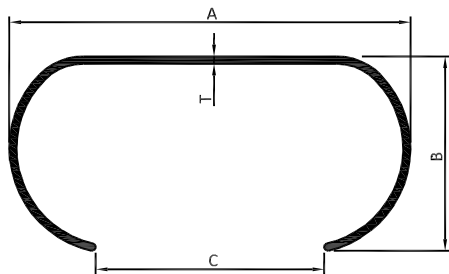


| SEC NO | A     | B     | C     | T    | WT/RANGE/12'  |
|--------|-------|-------|-------|------|---------------|
| 2413   | 65.00 | 31.50 | 37.00 | 1.20 | 1.400 - 1.600 |

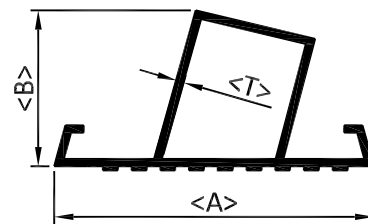


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2406   | 64.80 | 31.60 | 1.40 | 1.800 - 2.100 |
| 2407   | 64.80 | 31.60 | 1.60 | 2.350 - 2.600 |
| 2408   | 64.40 | 31.90 | 1.07 | 1.750 - 1.930 |

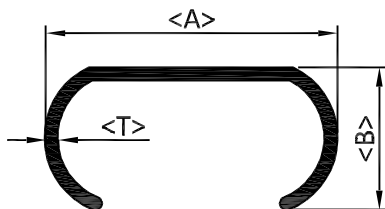


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2403   | 66.00 | 31.60 | 2.00 | 2.280 - 2.520 |
| 2404   | 66.00 | 31.60 | 2.40 | 2.820 - 3.060 |
| 2405   | 66.00 | 31.60 | 3.00 | 3.420 - 3.660 |

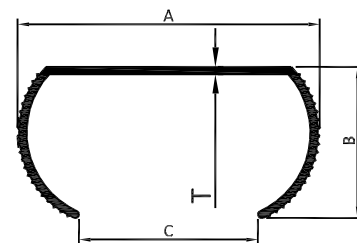

| SEC NO | A     | B     | C     | T    | WT/RANGE/12'  |
|--------|-------|-------|-------|------|---------------|
| 2412   | 49.00 | 24.50 | 29.00 | 1.20 | 1.050 - 1.300 |

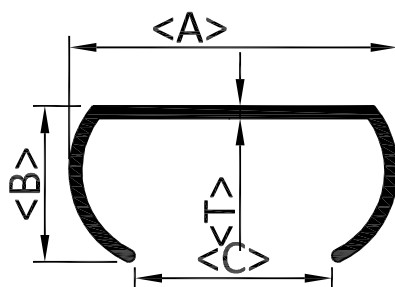

| SEC NO | A      | B     | C     | T    | WT/RANGE/12'  |
|--------|--------|-------|-------|------|---------------|
| 2421   | 65.00  | 32.00 | 36.00 | 1.20 | 1.590 - 1.740 |
| 2422   | 66.50  | 31.60 | 40.50 | 2.00 | 2.490 - 2.670 |
| 2423   | 66.50  | 31.60 | 40.10 | 2.50 | 3.090 - 3.330 |
| 2424   | 66.50  | 31.60 | 39.27 | 3.00 | 3.690 - 3.930 |
| 2425   | 66.50  | 31.60 | 39.60 | 3.50 | 4.740 - 5.100 |
| 2426   | 100.00 | 31.60 | 73.10 | 3.50 | 4.865 - 5.835 |
| 2432   | 79.00  | 35.95 | 45.00 | 4.00 | 5.400 - 5.960 |

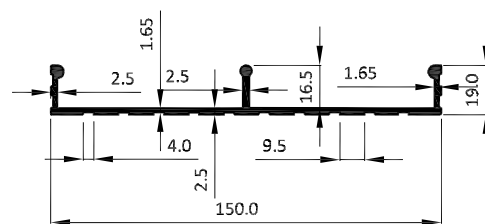

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8205   | 4.247 - 5.096 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

LADDER


PAGE 18 - III

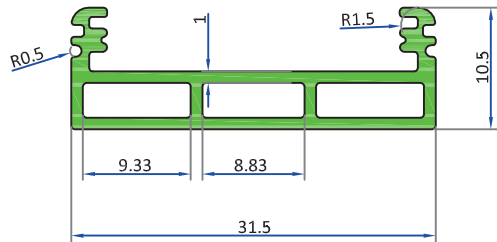


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8368   | 0.257           |

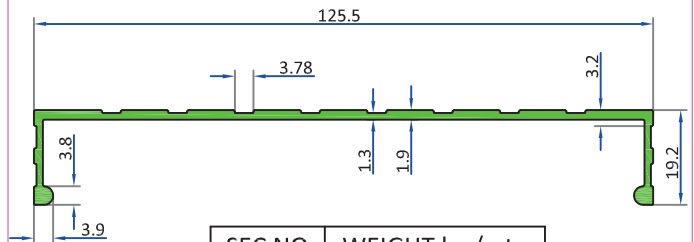


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16011  | 0.772           |

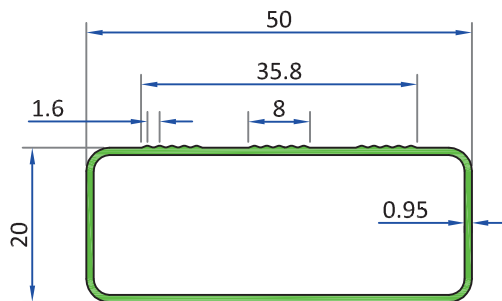

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8159   | 0.349           |

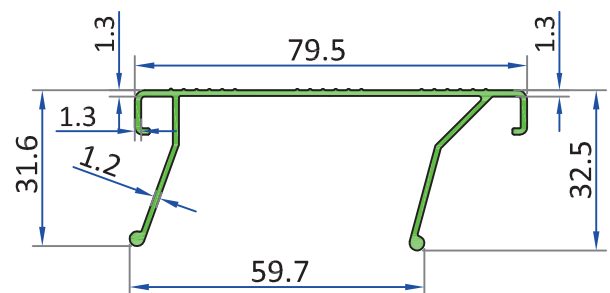


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8160   | 0.570           |

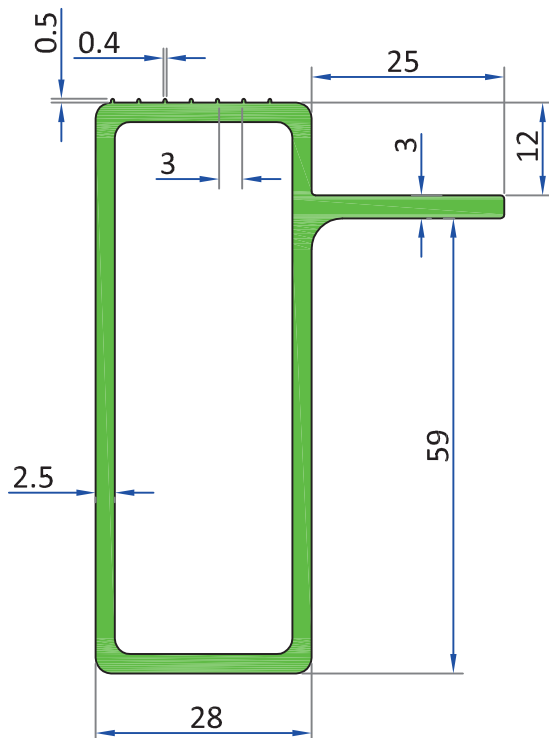

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8610   | 1.524           |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

MESH


PAGE 19 - I




| SEC NO | A     | B    | T    | WT/RANGE/12' |
|--------|-------|------|------|--------------|
| 7050   | 19.00 | 9.00 | 0.70 | 0.335-0.500  |
| 7050 L | 19.00 | 9.00 | 0.85 | 0.420-0.590  |




| SEC NO | A    | B     | T    | WT/RANGE/12' |
|--------|------|-------|------|--------------|
| 6155   | 25.0 | 13.30 | 1.09 | 0.650-0.775  |
| 6155L  | 25.0 | 13.30 | 0.86 | 0.500-0.650  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 7420   | 0.390-0.465  |

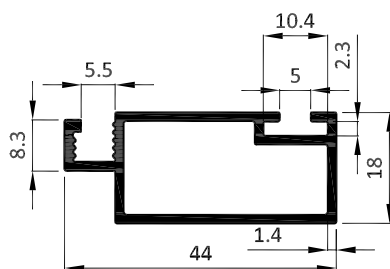

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7437   | 1.625 - 1.950 |

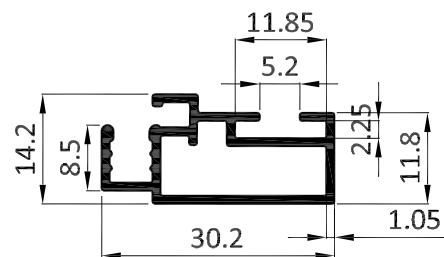


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7441   | 0.950 - 1.140 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

MESH


PAGE 19 - II

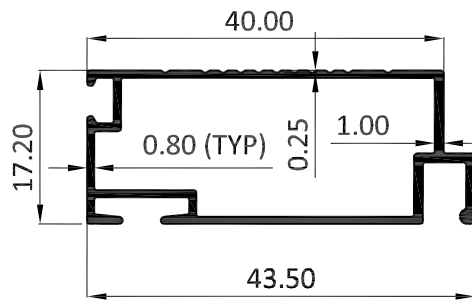

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8183   | 1.017 - 1.221 |

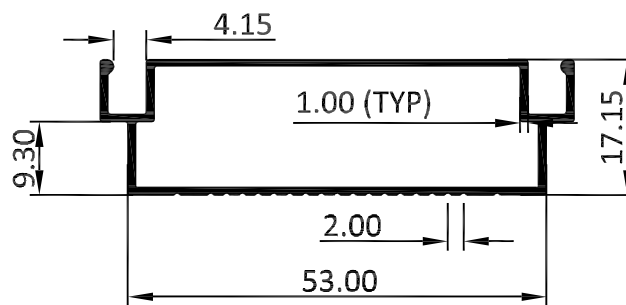

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8185   | 1.30 - 1.56  |

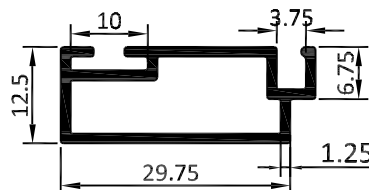


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8120   | 1.160 - 1.360 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

MESH


PAGE 19 - III

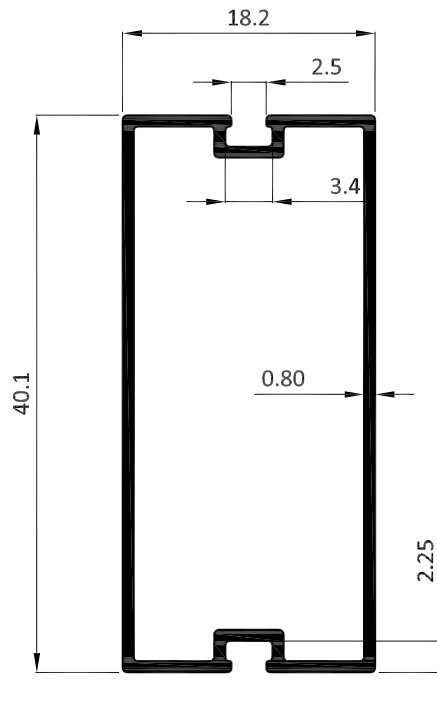

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8272   | 0.882 - 1.059 |

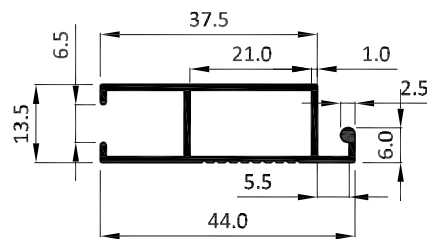

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8633   | 1.027 - 1.233 |

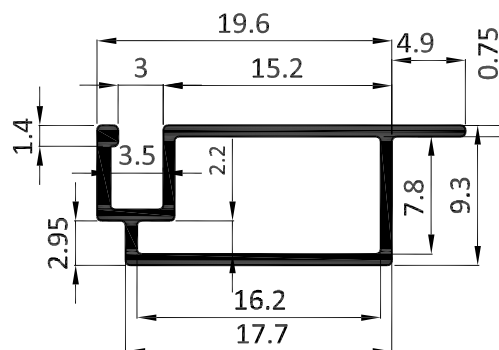

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6574   | 0.132         |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

MESH

PAGE 19 - IV

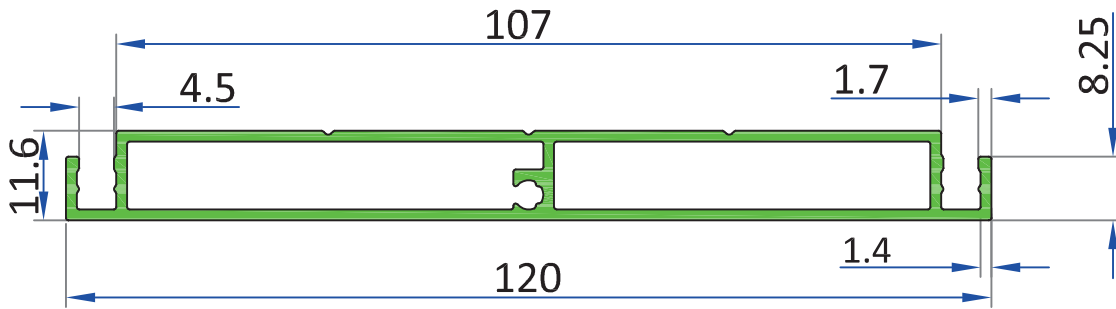


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 7438   | 1.037         |

COMMERCIAL

COMMERCIAL

ALL DIMENSIONS ARE IN MM







# KMC ALUMINIUM

MODULAR


PAGE 20 - I




| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 7051   | 76.00 | 74.80 | 2.00 | 8.200-9.000  |




| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 7052   | 76.00 | 65.20 | 2.20 | 5.500-5.800  |




| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 7053   | 76.00 | 45.20 | 2.00 | 4.500-5.400  |




| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 7054   | 76.00 | 50.00 | 2.10 | 6.100-6.500  |

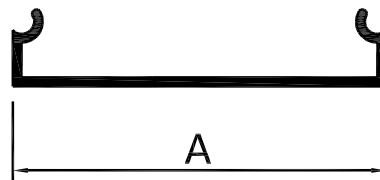

| SEC NO | A     | B     | T     | WT/RANGE/12' |
|--------|-------|-------|-------|--------------|
| 7055   | 76.00 | 10.12 | 1.200 | 1.100-1.250  |



| SEC NO | A     | B    | T    | WT/RANGE/12' |
|--------|-------|------|------|--------------|
| 7058   | 24.80 | 7.90 | 1.25 | 0.410-0.470  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8778   | 0.378-0.454  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

MOTOR BODY


PAGE 21 - I

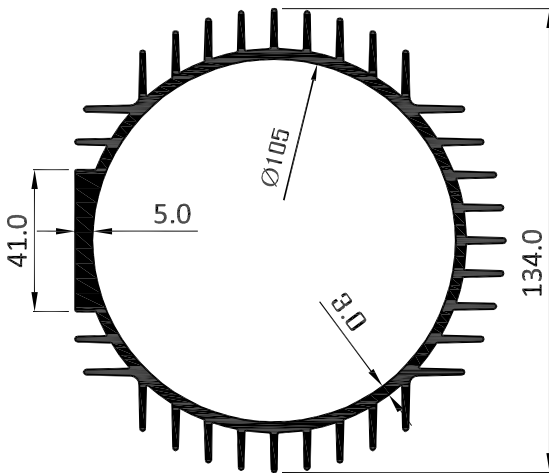


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| A 3750 | 18.000-19.000 |

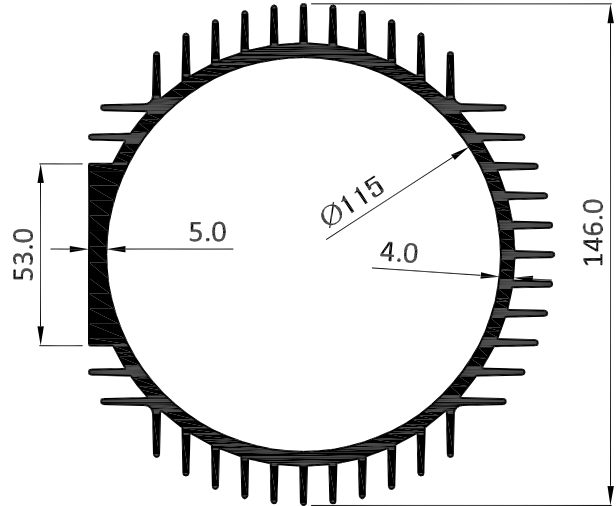

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| A 3751 | 24.300-25.500 |

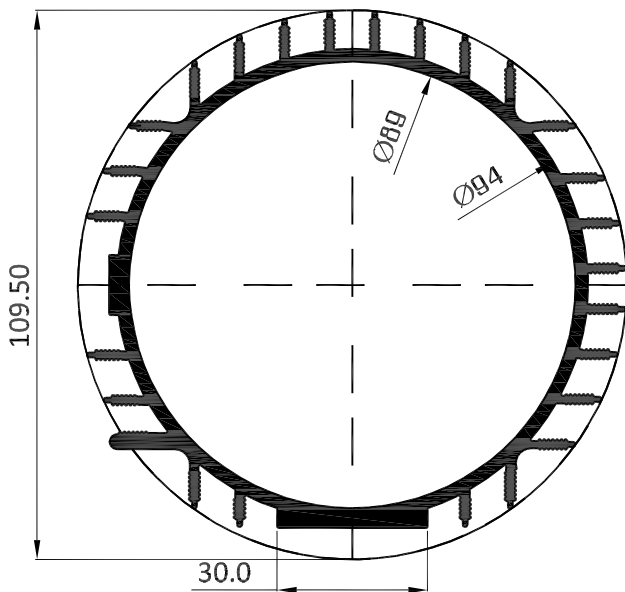

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3752   | 11.250 - 12.500 |

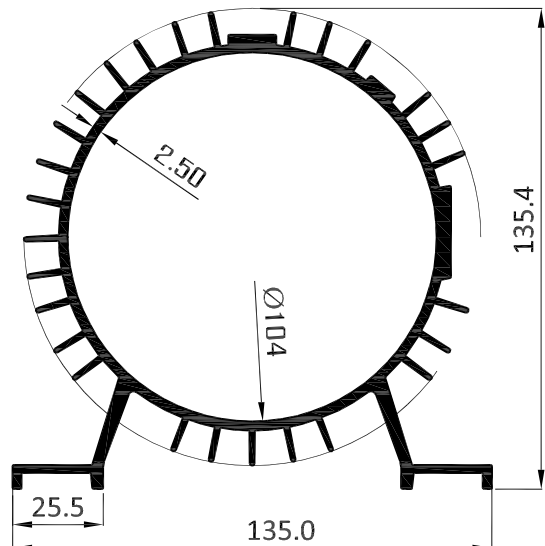

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| A 3753 | 15.500 - 17.500 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

MOTOR BODY


PAGE 21 - II

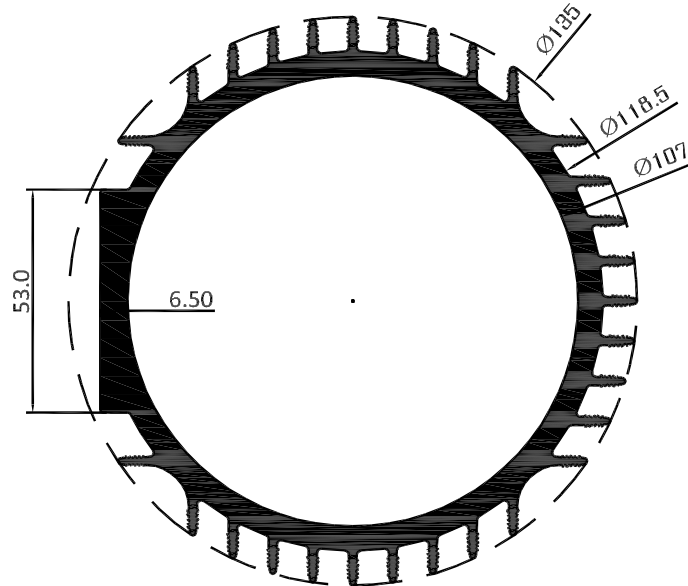

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3754   | 24.300-29.150 |

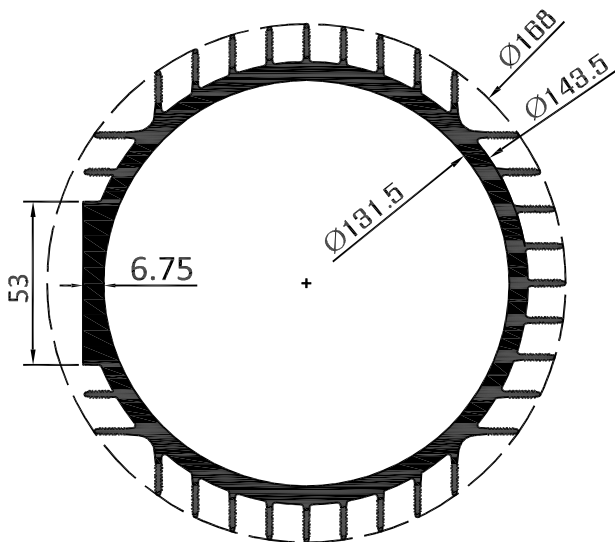

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3756   | 31.380 - 37.650 |

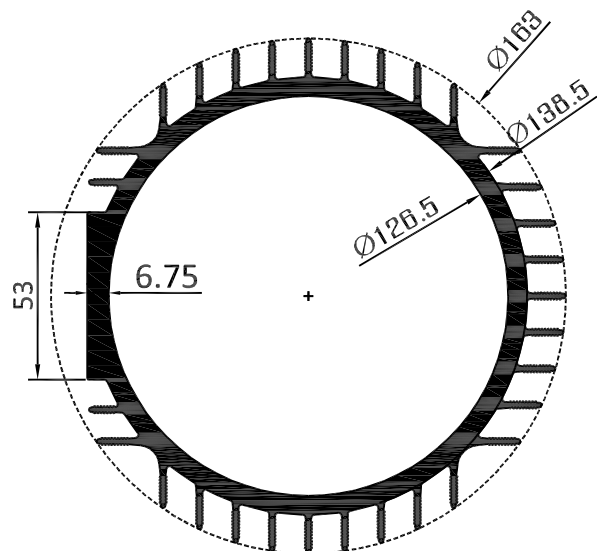

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3757   | 30.590 - 36.710 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

MOTOR BODY

PAGE 21 - III

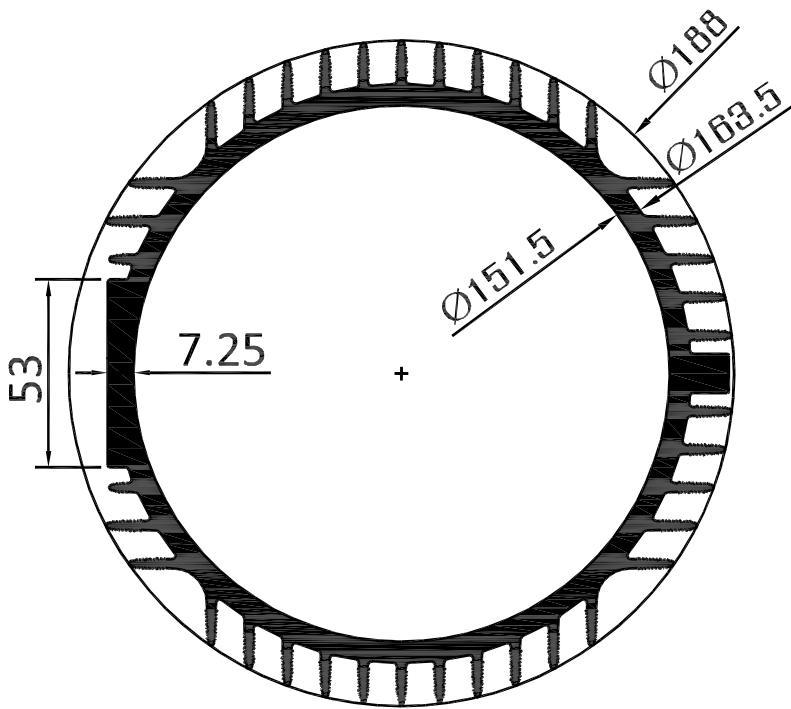

| SEC NO | WT/RANGE/12"    |
|--------|-----------------|
| 3758   | 39.975 - 47.970 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM


MOTOR BODY

PAGE 21 - IV

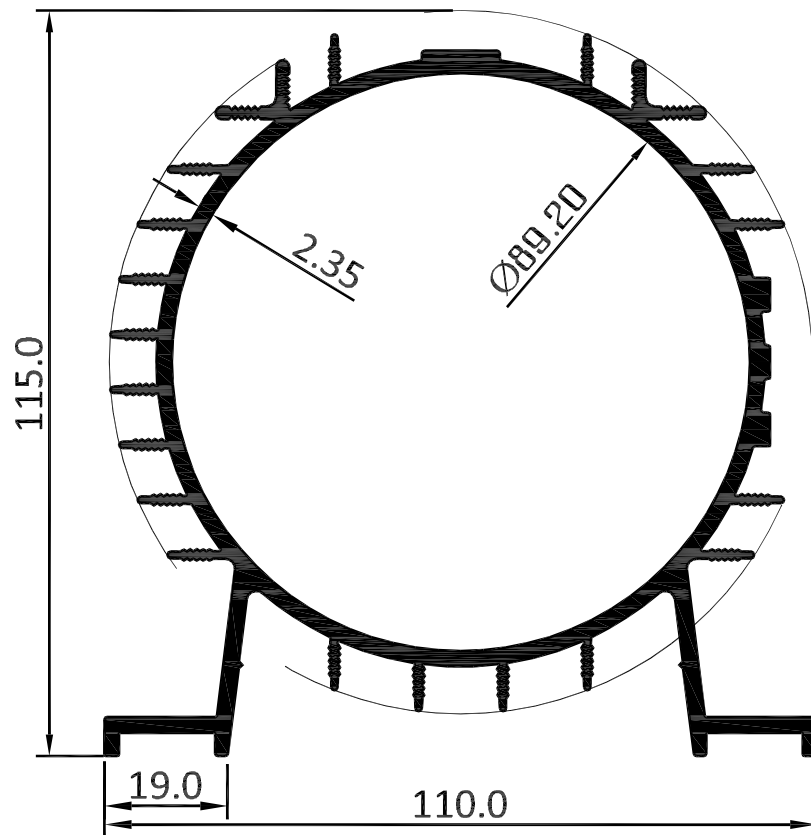

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3765   | 10.673 - 13.043 |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

MOTOR BODY

PAGE 21 - V

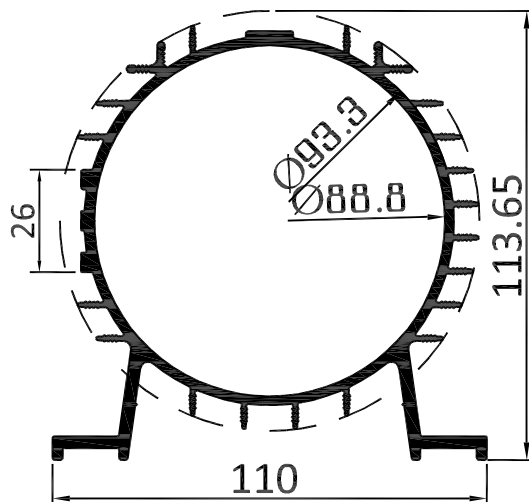

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3772   | 11.840 - 12.560 |

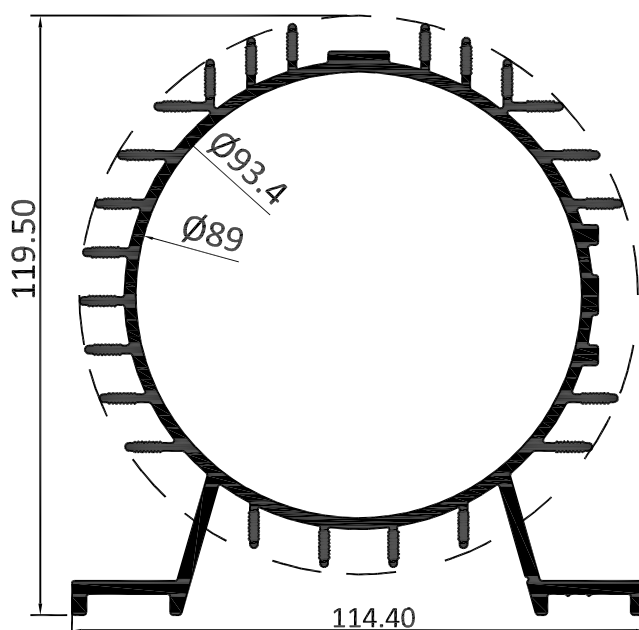

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3771   | 12.150 - 14.580 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

MOTOR BODY

PAGE 21 - VI

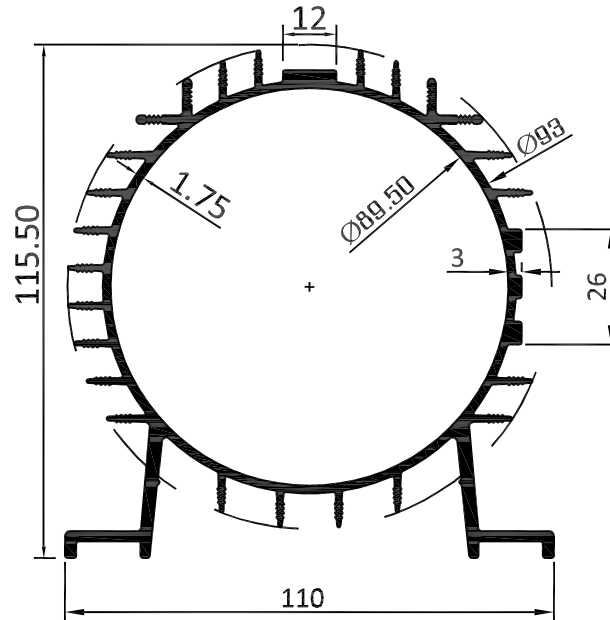

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3776   | 10.060 - 12.070 |

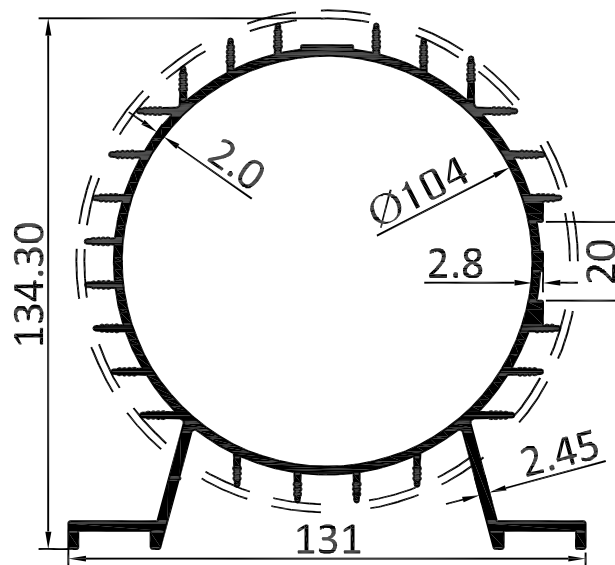

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3775   | 11.785 - 14.140 |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

MOTOR BODY


PAGE 21 - VII

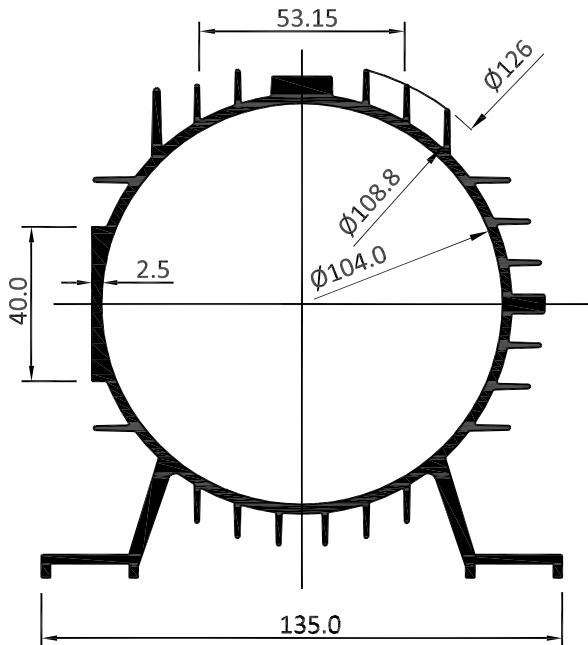

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3777   | 14.002 - 16.803 |

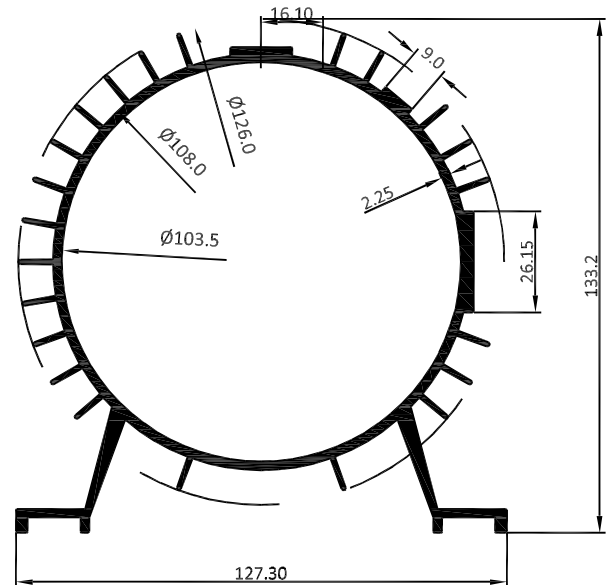

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3778   | 12.044 - 14.452 |

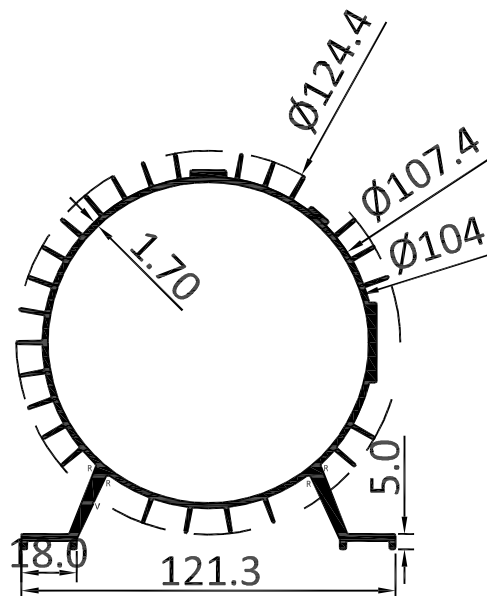


| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 3781   | 10.208 - 12.250 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL







# KMC ALUMINIUM

MOTOR BODY

PAGE 21 - VIII

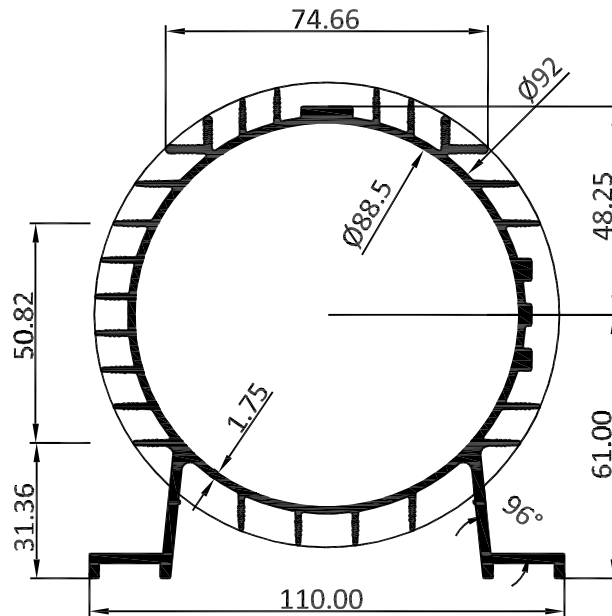

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3783   | 9.667 -11.601 |

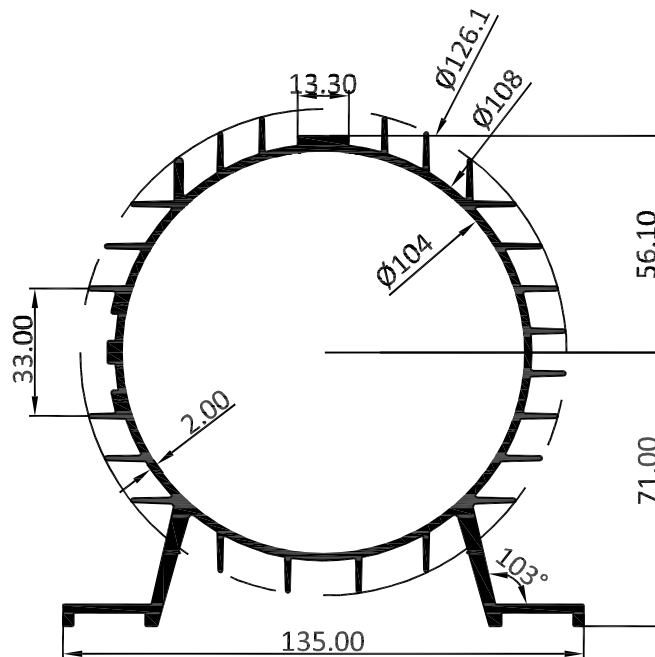

| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 3784   | 12.592 -15.111 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

MOTOR BODY

PAGE 21 - IX

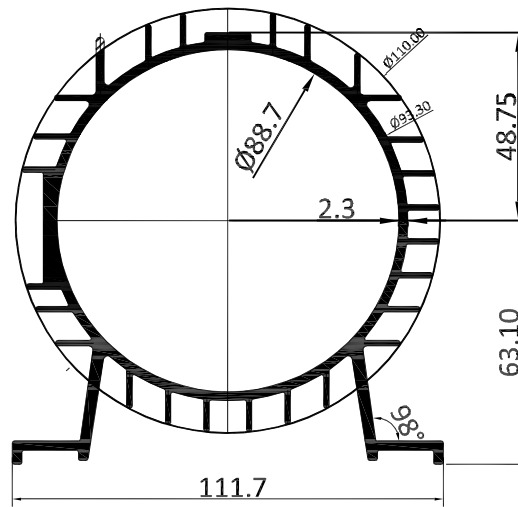

| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 3786   | 12.207 -14.649 |

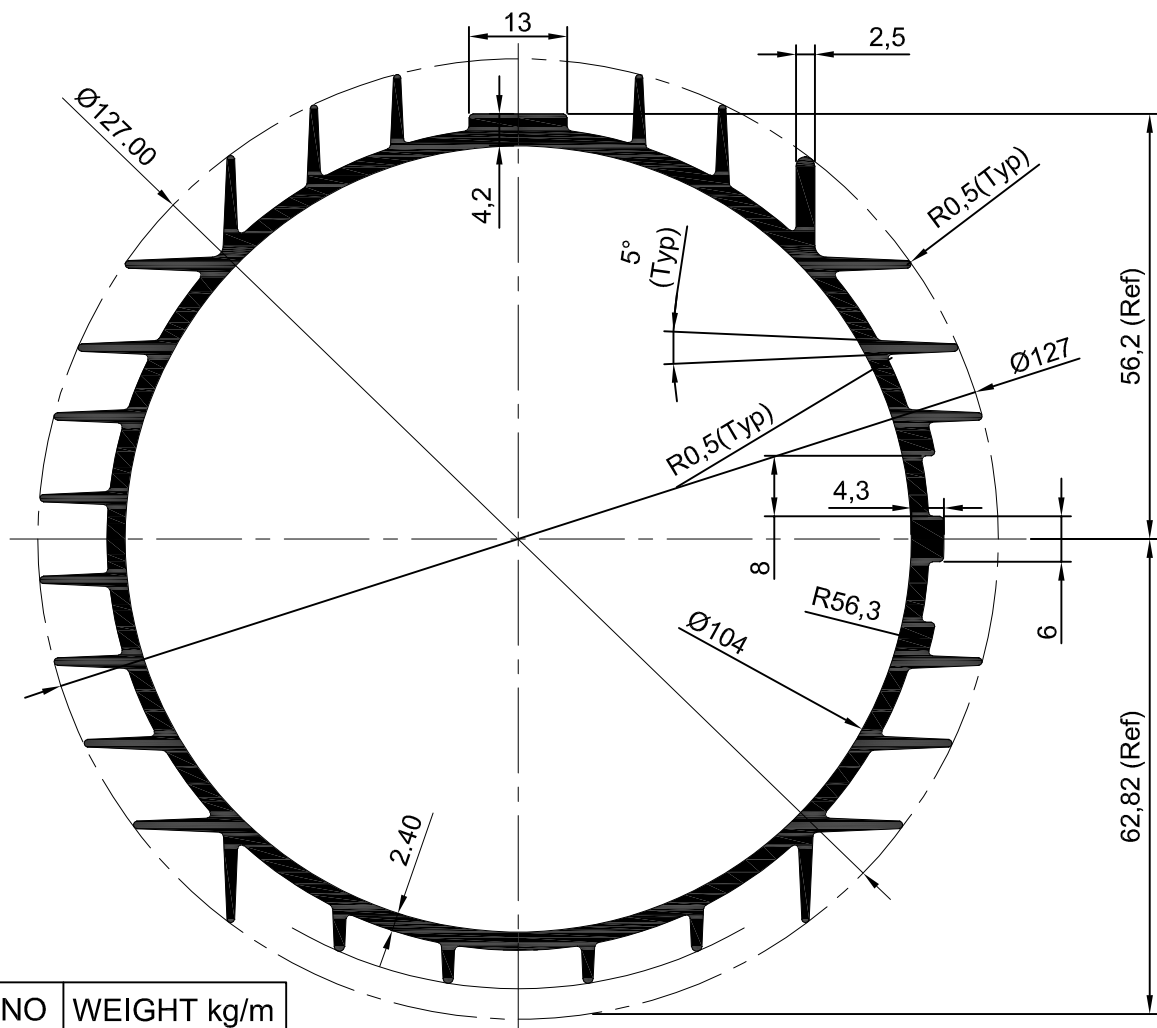

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7729  | 3.314       |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

MOTOR BODY

PAGE 21 - X

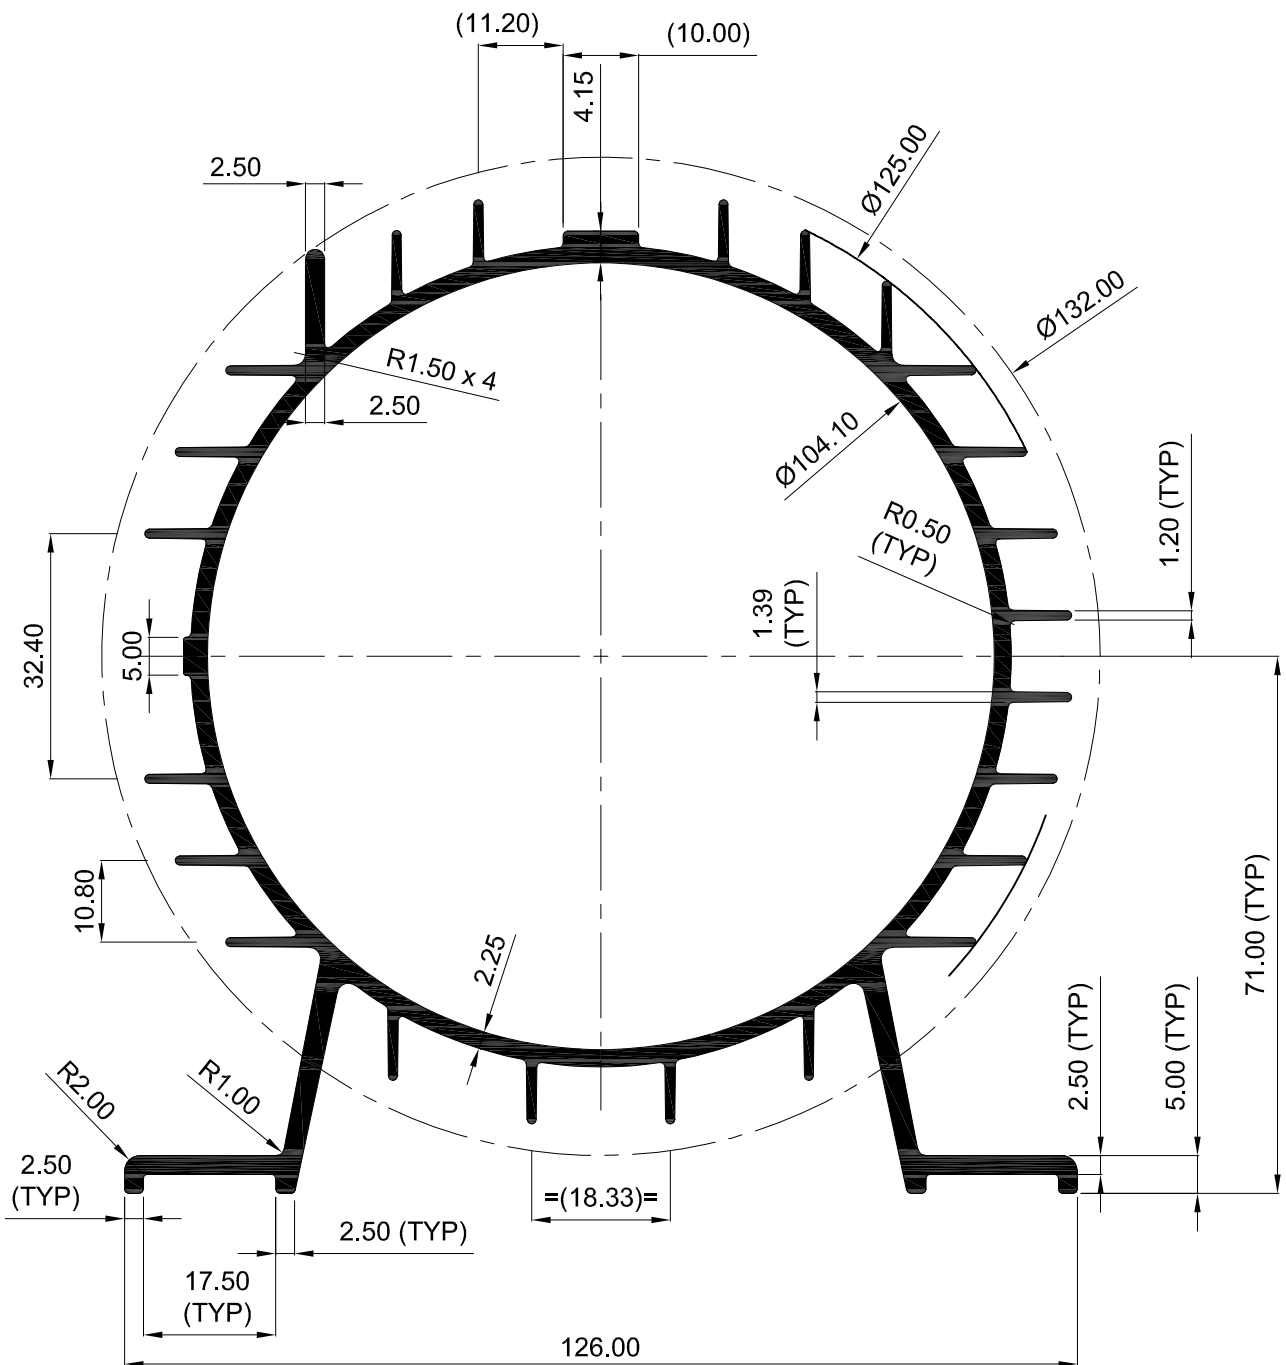

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7730  | 3.707       |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

OEM


PAGE 22 - I

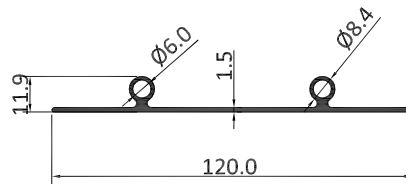


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8941   | 2.233 - 2.680 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6973   | 2.500 - 3.250 |

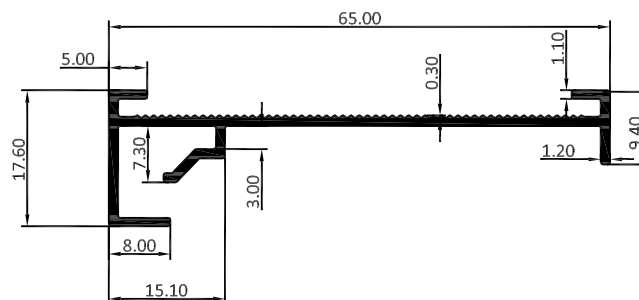

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 4073   | 0.376           |

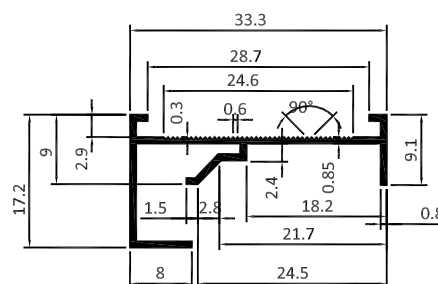

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 4072   | 0.159           |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

OEM


PAGE 22 - II

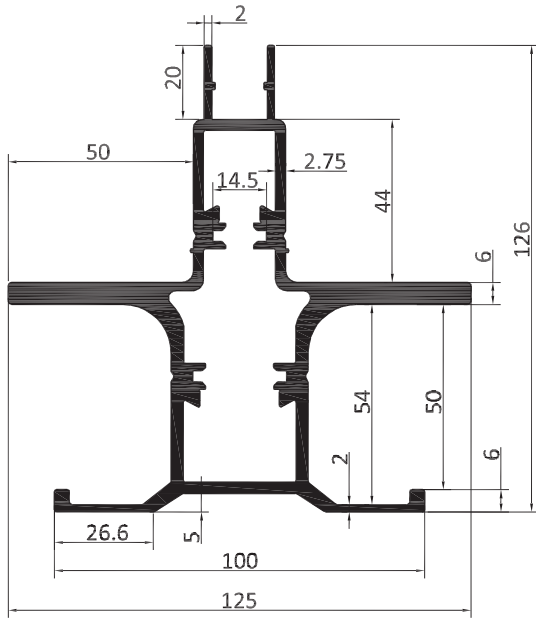

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8654   | 4.906           |

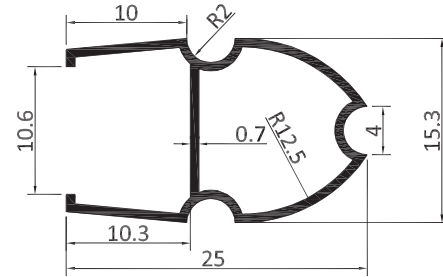

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8007   | 0.140           |

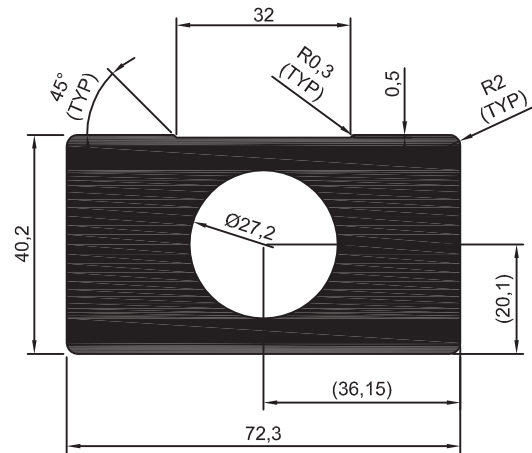

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7265  | 6.317       |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

POWER


PAGE 23 - I

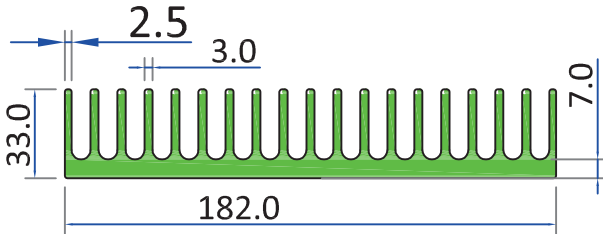


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6605   | 27.000-28.600 |

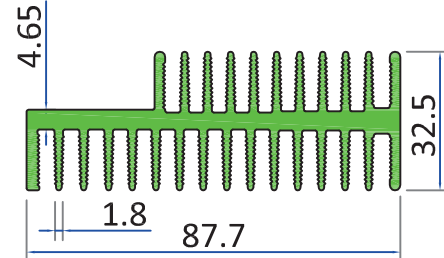


| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 6607   | 10.200 - 10.800 |

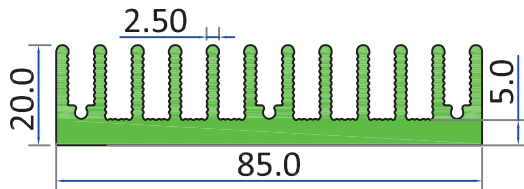


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6611   | 8.000 - 9.000 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6613   | 0.800 - 1.000 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6616   | 2.500 - 3.430 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6615   | 5.800 - 7.500 |



| SECNO | OD | ID   | WT/RANGE/12'  |
|-------|----|------|---------------|
| 3064  | 32 | 18.0 | 2.330 - 2.770 |
| 3065  | 33 | 21.5 | 2.200 - 2.500 |
| 3067  | 43 | 25.0 | 4.228 - 4.900 |

| SECNO | OD | ID | WT/RANGE/12'  |
|-------|----|----|---------------|
| 3071  | 58 | 38 | 7.200-7.600   |
| 3077  | 48 | 29 | 5.030-6.030   |
| 3085  | 64 | 41 | 9.200-10.000  |
| 3086  | 48 | 31 | 5.100-5.600   |
| 3104  | 38 | 23 | 3.450-3.750   |
| 3133  | 54 | 33 | 6.230-7.480   |
| 6093  | 54 | 34 | 6.700-7.100   |
| 9052  | 32 | 19 | 2.300 - 2.800 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

POWER


PAGE 23 - II




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 9056   | 3.530-4.030  |




| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 8113   | 12.100 - 14.500 |

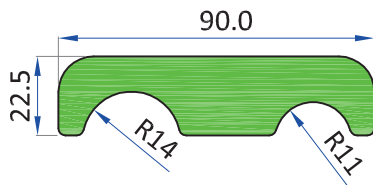


| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 8114   | 13.830 - 16.600 |

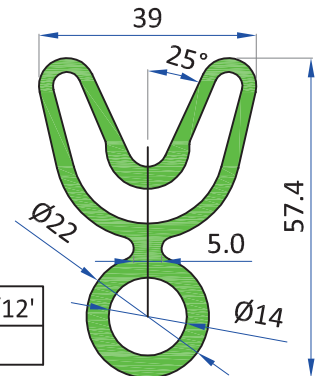


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8130   | 5.700 - 6.840 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8131   | 0.410 - 0.490 |

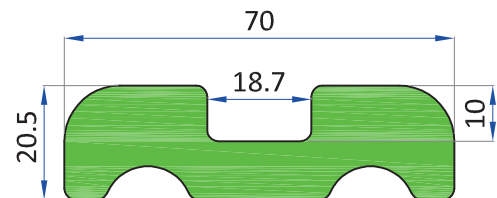

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 8132   | 10.515 - 12.620 |

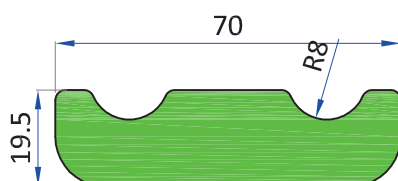

| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 8133   | 10.505 - 12.605 |

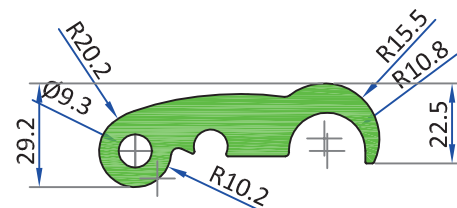

| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 8145   | 9.350 - 11.210 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

POWER


PAGE 23 - III

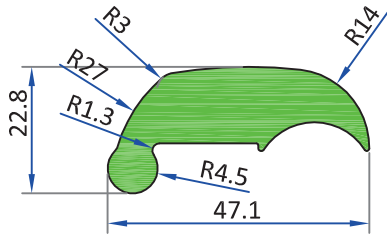


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8146   | 4.800 - 5.750 |

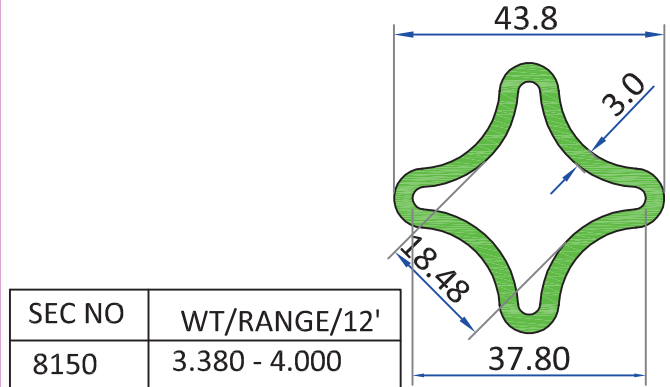


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8150   | 3.380 - 4.000 |

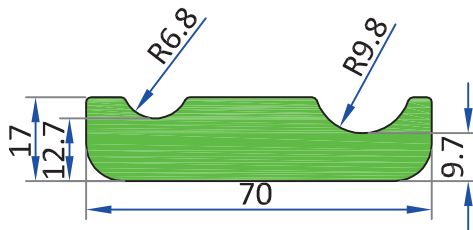


| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 8153   | 9.100 - 10.920 |

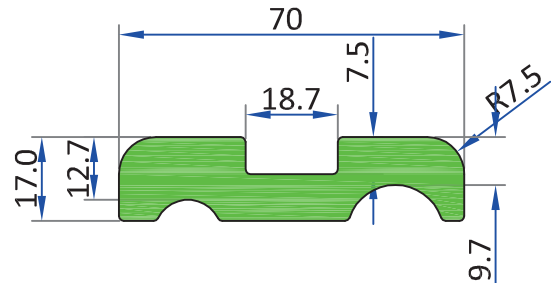


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8154   | 7.850 - 9.425 |

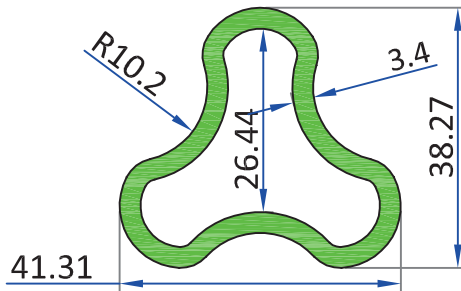


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8168   | 3.285 - 3.940 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8174   | 0.780 - 0.935 |

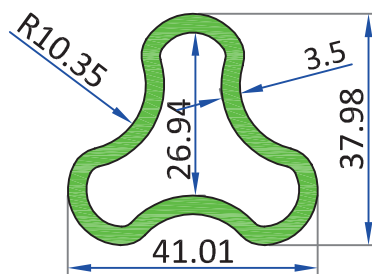

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8177   | 3.830 - 4.600 |

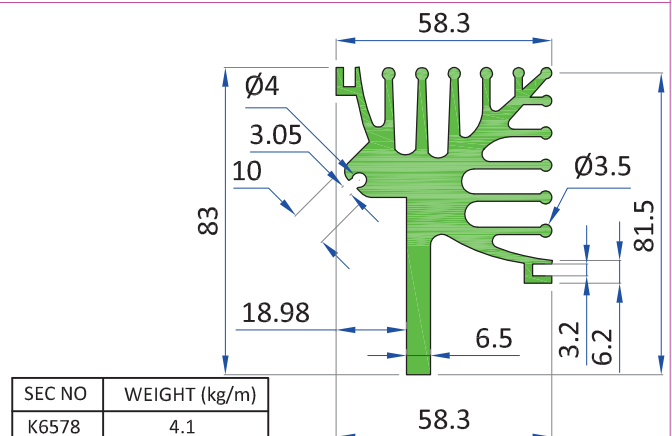

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| K6578  | 4.1           |

ALL DIMENSIONS ARE IN MM






COMMERCIAL

COMMERCIAL





PAGE 23 - IV



ALL DIMENSIONS ARE IN MM


COMMERCIAL




# KMC ALUMINIUM

POWER


PAGE 23 - V

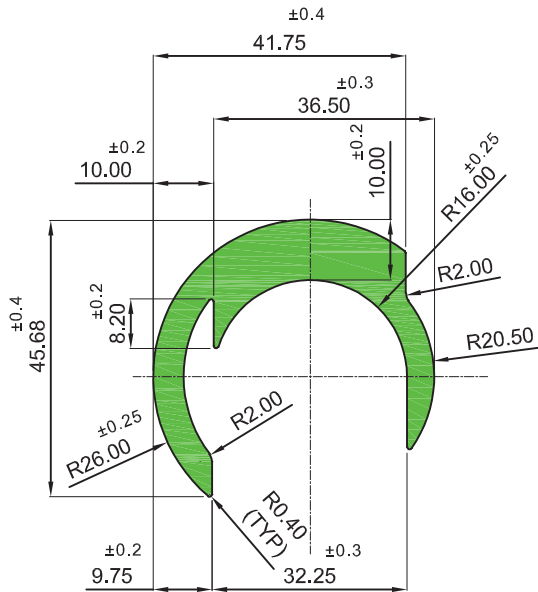


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7317  | 1.754       |

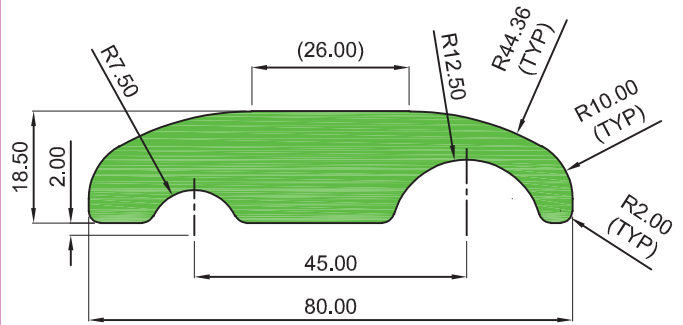

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7439  | 2.892       |

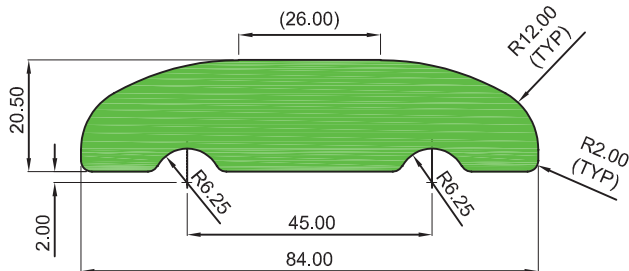

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7505  | 3.901       |

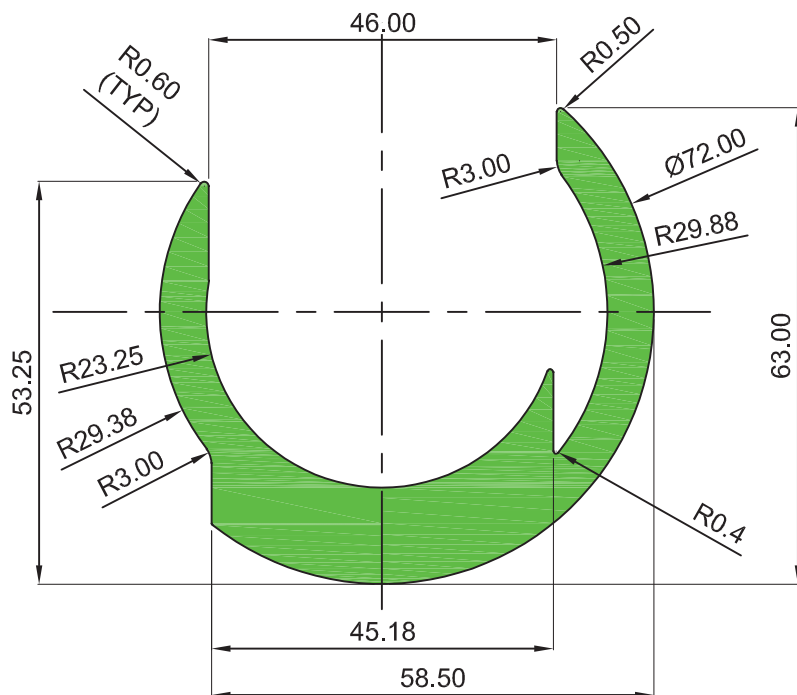

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7531  | 3.121       |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

RAILWAY


PAGE 24 - I

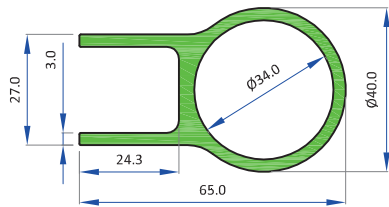


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8268   | 5.023 - 6.028 |

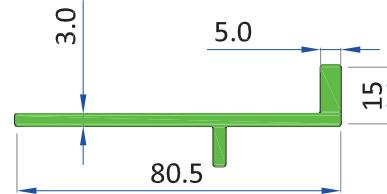


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8035   | 3.050-3.490  |

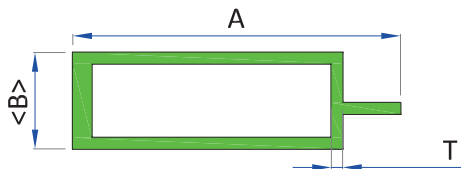


| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 7078   | 85.00 | 25.00 | 2.90 | 5.510-6.330  |




| SECNO | A     | B    | T    | WT/RANGE/12' |
|-------|-------|------|------|--------------|
| 7077  | 100.0 | 25.0 | 2.90 | 6.500-7.000  |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8036   | 3.330-3.800  |

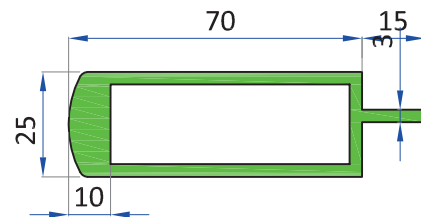

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6015   | 6.310-7.210  |

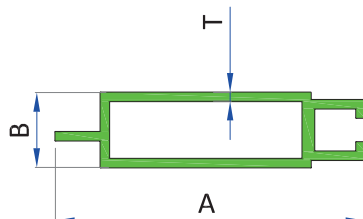

| SECNO | A     | B    | T    | WT/RANGE/12' |
|-------|-------|------|------|--------------|
| 7076  | 103.0 | 25.0 | 2.90 | 6.650-7.120  |



| SEC NO | A     | B    | T    | WT/RANGE/12' |
|--------|-------|------|------|--------------|
| 7075   | 45.00 | 12.5 | 1.90 | 0.860-0.950  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

RAILWAY


PAGE 24 - II

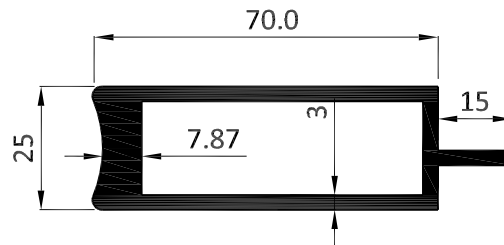

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6016   | 6.280-7.180  |



| SECNO | A     | B    | T   | WT/RANGE/12' |
|-------|-------|------|-----|--------------|
| 7074  | 50.00 | 9.00 | 2.9 | 1.720-1.840  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5305   | 0.583- 0.699 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

RAILWAY


PAGE 24 - III

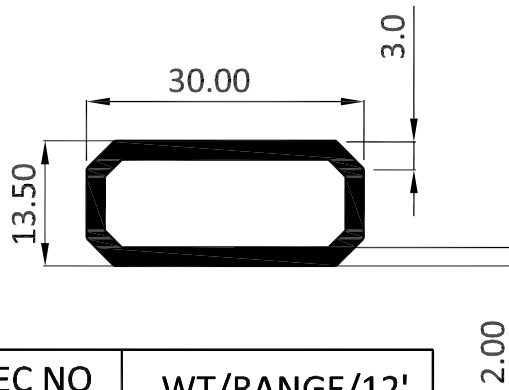

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8880   | 1.304-1.565  |

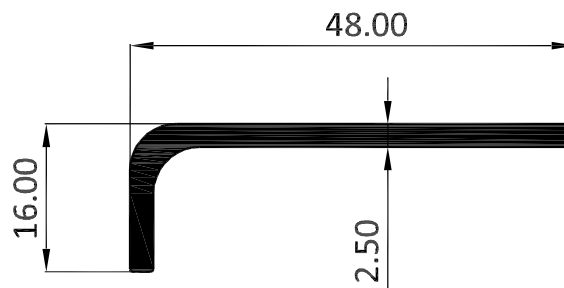

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8882   | 1.367-1.640  |

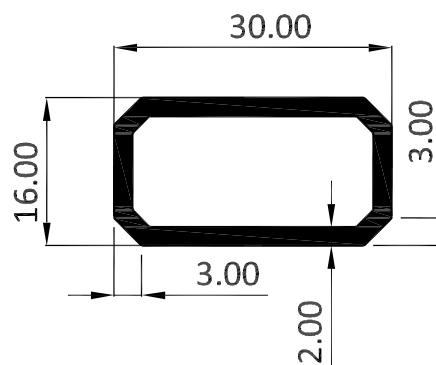

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8881   | 1.393-1.672  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

RAILWAY


PAGE 24 - IV

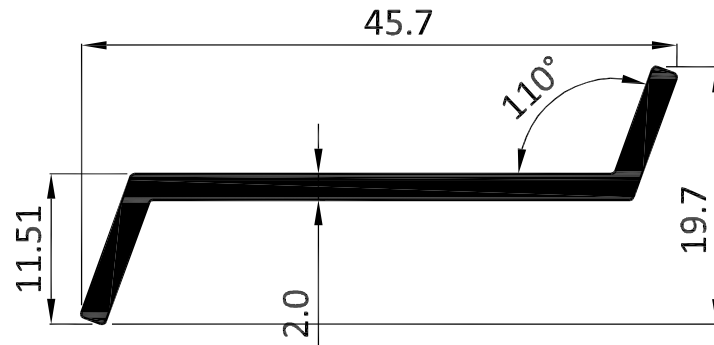

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 5311   | 1.017 - 1.221 |

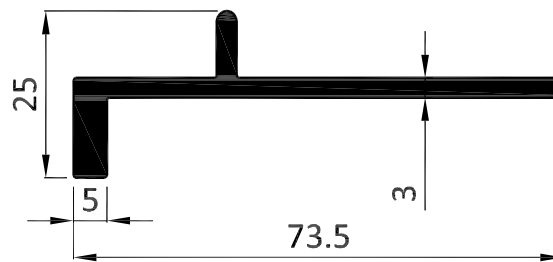

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 3068   | 2.850-3.260  |

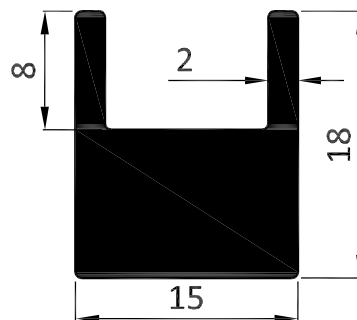

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 3066   | 1.750-2.050  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

RAILWAY

PAGE 24 - V

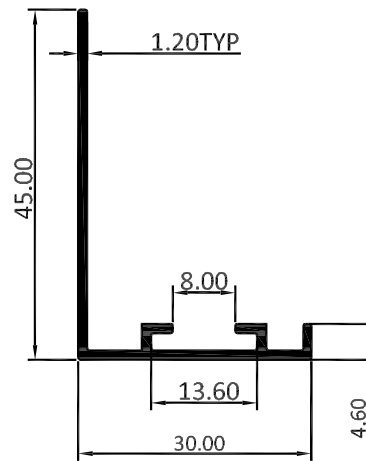

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5301   | 0.948- 1.138 |

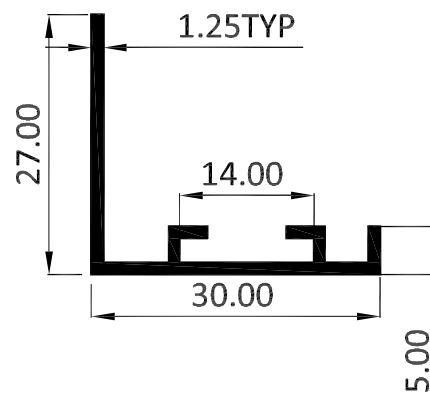

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5303   | 0.800- 0.960 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

RAILWAY


PAGE 24 - VI

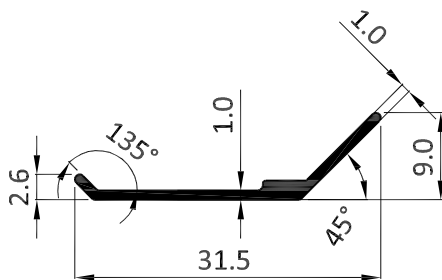


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5304   | 0.342- 0.411 |

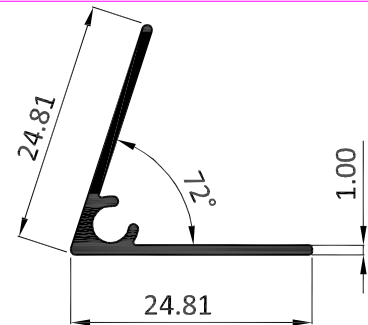


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5302   | 0.497- 0.596 |

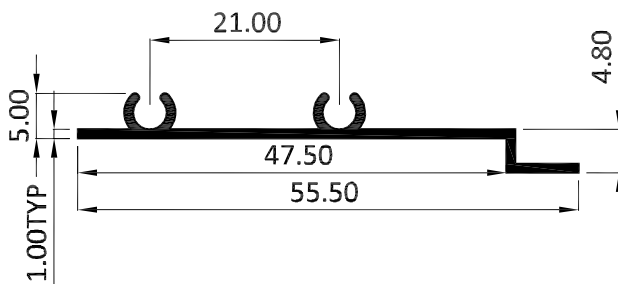


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 5313   | 0.681 - 0.818 |

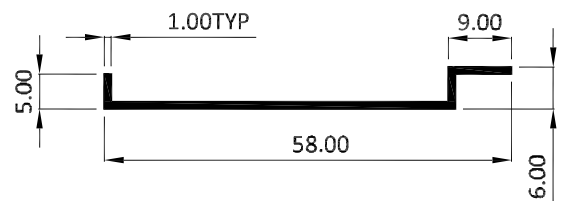

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 5314   | 0.592 - 0.711 |

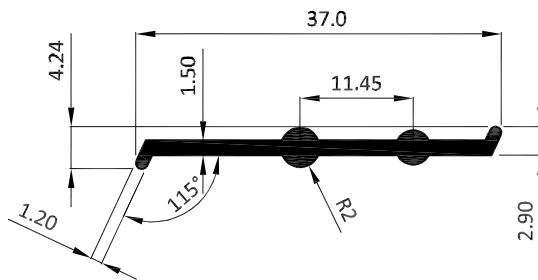

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5316   | 0.602- 0.723 |

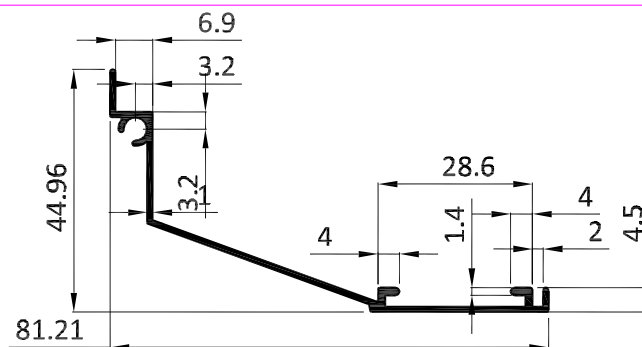

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| 6094A  | 0.379       |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL







# KMC ALUMINIUM

RAILWAY

PAGE 24 - VII

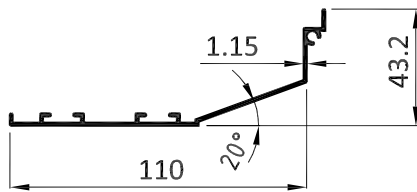

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6157   | 2.000-2.300  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 5004   | 1.450-1.750  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - I




| SEC NO | A    | B    | T   | WT/RANGE/12'  |
|--------|------|------|-----|---------------|
| 1303   | 23.7 | 23.7 | 1.5 | 0.720 - 0.850 |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6280   | 0.950-1.250  |




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 2164   | 22.70 | 22.70 | 0.85 | 0.475 - 0.500 |
| 2165   | 22.70 | 22.70 | 1.00 | 0.550 - 0.650 |
| 2168   | 22.70 | 22.70 | 1.25 | 0.750 - 0.850 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4215   | 24.00 | 12.80 | 1.60 | 1.300 - 1.500 |

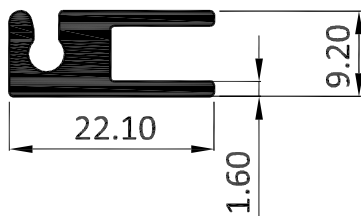

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3099   | 1.100 - 1.350 |




| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 1748   | 17.00 | 8.00 | 1.20 | 0.500 - 0.550 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - II

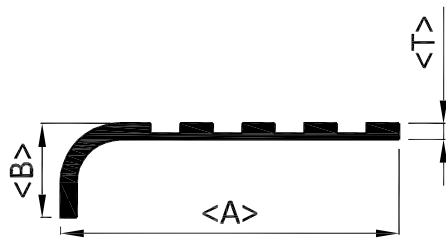


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4211   | 38.1  | 16.50 | 2.50 | 1.050 - 1.200 |
| 4213   | 57.15 | 15.88 | 2.70 | 1.250 - 1.400 |




| SECNO | A     | T    | WT/RANGE/12'  |
|-------|-------|------|---------------|
| 4200  | 25.40 | 3.00 | 0.600 - 0.750 |




| SEC NO | A     | B     | T   | WT/RANGE/12'  |
|--------|-------|-------|-----|---------------|
| 4214   | 57.15 | 15.88 | 2.7 | 1.350 - 1.550 |
| 4214L  | 57.15 | 15.88 | 2.0 | 1.050-1.300   |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 4216   | 1.250 - 1.450 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4212   | 38.10 | 12.50 | 1.80 | 0.625 - 0.750 |



| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 4217   | 31.75 | 4.10 | 2.60 | 0.900 - 1.000 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - III




| SEC NO | A    | B    | C   | T    | WT/RANGE/12'  |
|--------|------|------|-----|------|---------------|
| 4218   | 32.0 | 3.40 | 1.7 | 3.00 | 0.800 - 1.000 |
| 4218/L | 32.0 | 3.00 | 1.0 | 3.00 | 0.600 - 0.700 |
| 4219   | 32.0 | 3.40 | 1.4 | 3.00 | 0.700 - 0.800 |

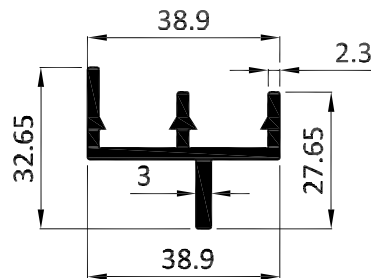

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3112   | 1.950 - 2.300 |



| SEC NO  | A     | B     | T    | WT/RANGE/12'  |
|---------|-------|-------|------|---------------|
| 4243(L) | 43.20 | 45.00 | 1.45 | 1.600 - 1.800 |
| 4243(M) | 43.30 | 45.00 | 1.90 | 2.100 - 2.400 |
| 4243(H) | 43.30 | 45.00 | 2.30 | 2.400 - 2.600 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3078   | 0.720 - 0.820 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - IV




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 3070   | 2.000-2.300  |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4234   | 33.00 | 12.50 | 1.25 | 0.750 - 0.950 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3062   | 1.350 - 1.550 |



| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4244   | 43.00 | 52.50 | 2.60 | 2.800 - 3.200 |
| 4246   | 40.25 | 51.80 | 3.00 | 3.050 - 3.350 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

TRANSPORT

PAGE 25 - V

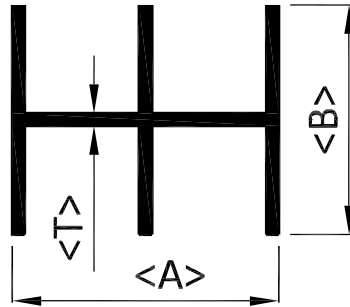

| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4245   | 36.00 | 31.00 | 1.70 | 2.000 - 2.300 |

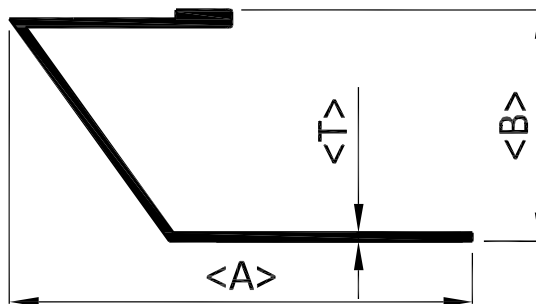

| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 4319   | 55.50 | 25.00 | 1.10 | 0.920-1.100  |
| 4340   | 50.00 | 25.00 | 0.90 | 0.700-0.900  |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - VI




| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 4301   | 24.00 | 5.40 | 2.10 | 0.370 - 0.400 |
| 4302   | 24.00 | 5.85 | 2.65 | 0.470 - 0.500 |
| 4303   | 24.00 | 6.32 | 3.15 | 0.580 - 0.620 |
| 4304   | 31.96 | 6.25 | 2.00 | 0.589 - 0.706 |




| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4309   | 52.40 | 13.80 | 1.00 | 1.000 - 1.200 |
| 4320   | 52.40 | 13.80 | 1.75 | 1.600 - 1.900 |




| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 4336   | 25.00 | 3.70 | 0.80 | 0.325 - 0.425 |
| 4337   | 25.20 | 3.70 | 2.60 | 0.575 - 0.675 |

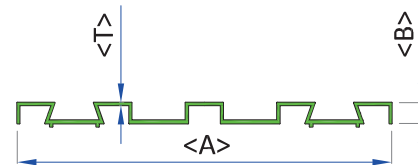


| SEC NO | A      | B    | T    | WT/RANGE/12' |
|--------|--------|------|------|--------------|
| 4321   | 126.50 | 7.00 | 0.80 | 1.700-1.900  |
| 4322   | 126.50 | 7.00 | 1.20 | 2.150-2.540  |




| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 4331L  | 87.00 | 7.00 | 0.69 | 0.895 - 1.075 |
| 4331   | 87.00 | 7.00 | 0.76 | 0.950 - 1.250 |



| SEC NO | W.T. RANGE/12'     |
|--------|--------------------|
| 4346   | 1.850-2.100 Kg/12' |



| SEC NO | A     | B    | T    | WT/RANGE/12' |
|--------|-------|------|------|--------------|
| 4324   | 30.00 | 4.80 | 0.52 | 0.180-0.270  |
| 4325   | 30.00 | 5.0  | 0.80 | 0.300-0.400  |
| 4326   | 30.00 | 4.90 | 1.05 | 0.410-0.470  |
| 4327   | 30.00 | 5.71 | 1.20 | 0.480-0.530  |
| 4328   | 30.00 | 5.00 | 1.50 | 0.600-0.655  |



| SEC NO | A     | B     | T    | WT/RANGE/12' |
|--------|-------|-------|------|--------------|
| 4315   | 25.00 | 18.50 | 1.20 | 0.550-0.650  |
| 4316   | 25.00 | 18.50 | 1.60 | 0.850-1.000  |
| 4317   | 37.50 | 18.50 | 1.50 | 0.825-0.950  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - VII




| SEC NO | A    | B   | T   | WT/RANGE/12'  |
|--------|------|-----|-----|---------------|
| 4335   | 43.6 | 9.5 | 3.0 | 1.650 - 1.850 |

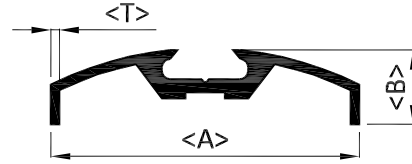


| SEC NO | A     | B     | T    | WT/RANGE/12'  |
|--------|-------|-------|------|---------------|
| 4311   | 50.00 | 12.00 | 0.80 | 0.950 - 1.200 |
| 4314   | 50.00 | 12.00 | 2.15 | 1.600 - 1.900 |

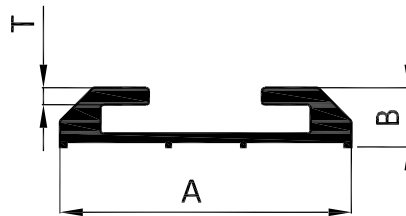

| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 4339   | 39.40 | 8.00 | 2.27 | 0.950 - 1.200 |

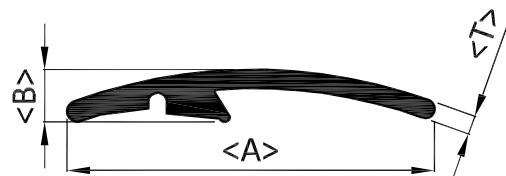

| SEC NO | A     | B    | T    | WT/RANGE/12'  |
|--------|-------|------|------|---------------|
| 4344   | 49.70 | 7.00 | 2.50 | 1.500 - 1.700 |

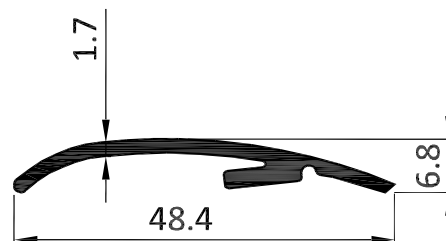


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6281   | 1.040-1.240  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL







# KMC ALUMINIUM

TRANSPORT


PAGE 25 - VIII




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6140   | 1.050-1.200  |

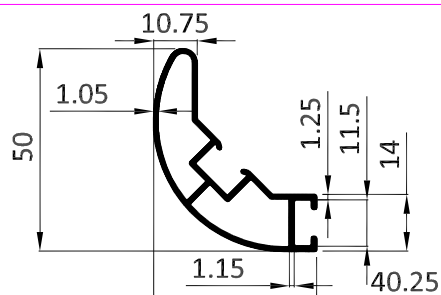

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6197   | 1.850 - 2.150 |

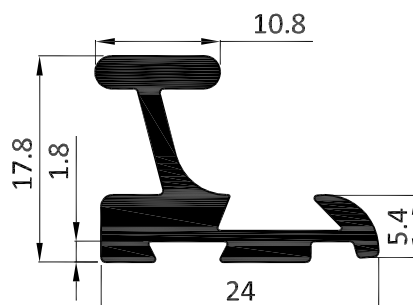

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6125   | 1.280-1.480  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6064   | 0.500-0.650  |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - IX




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6282   | 0.450-0.550  |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6064   | 0.500 - 0.650 |




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3060   | 0.475 - 0.675 |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6322   | 0.600-0.750  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6283   | 1.650-1.850  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6320   | 1.150-1.350  |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - X

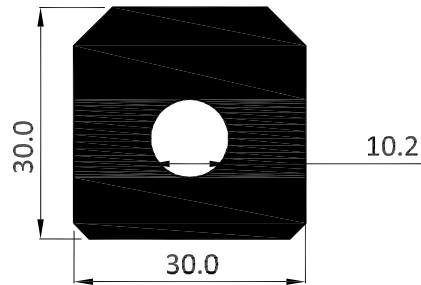


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6752   | 7.500 - 8.000 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 4251   | 0.603 - 0.724 |

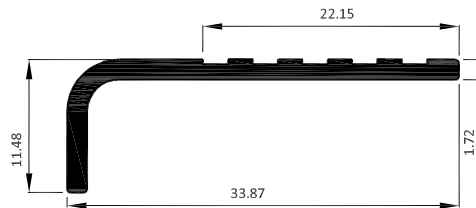

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 4240   | 0.602 - 0.723 |

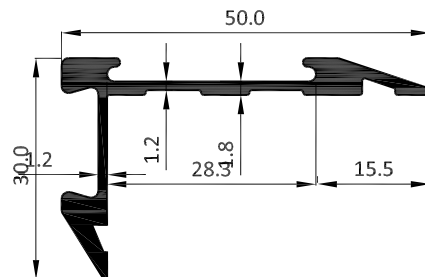

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8259   | 1.401 - 1.681 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - XI

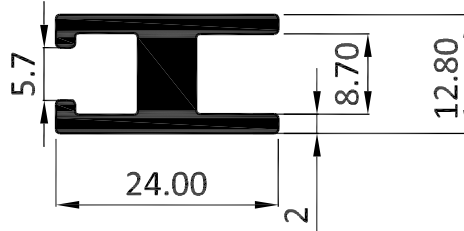

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8041   | 1.650 - 1.800 |

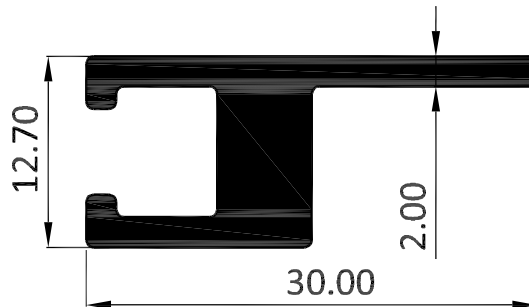

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8042   | 1.450 - 1.650 |

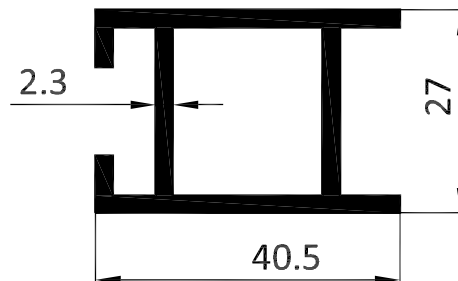

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8031   | 3.000 - 3.300 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XII

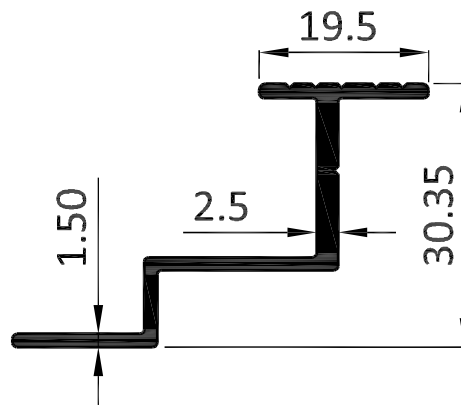

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6586   | 1.300 - 1.555 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XIII

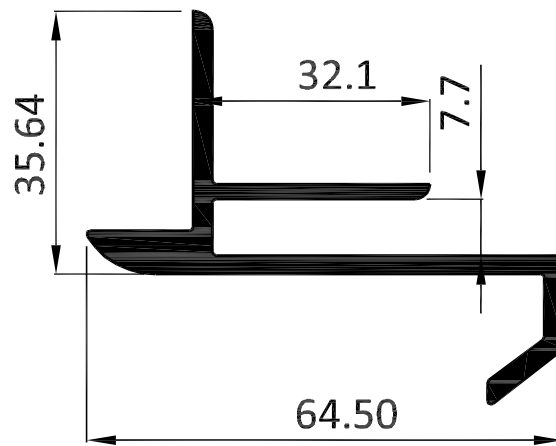

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6587   | 3.520 - 4.220 |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XIV



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6279   | 0.415 - 0.530 |

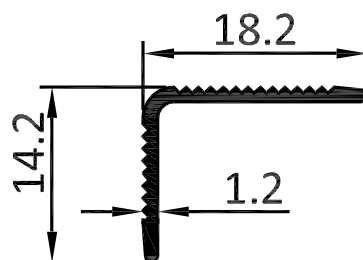

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 1306   | 0.245 - 0.345 |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XV

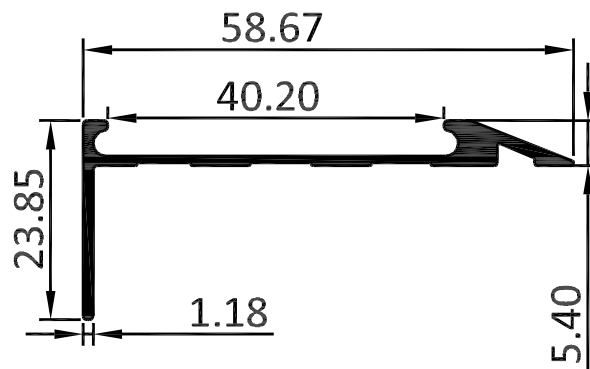

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8110   | 0.970 - 1.165 |

ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XVI

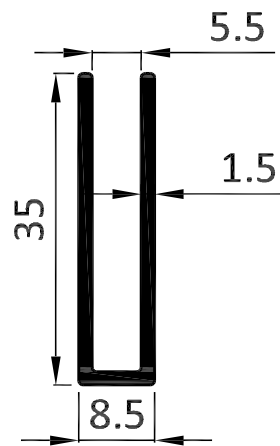

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8161   | 1.000 - 1.200 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XVII

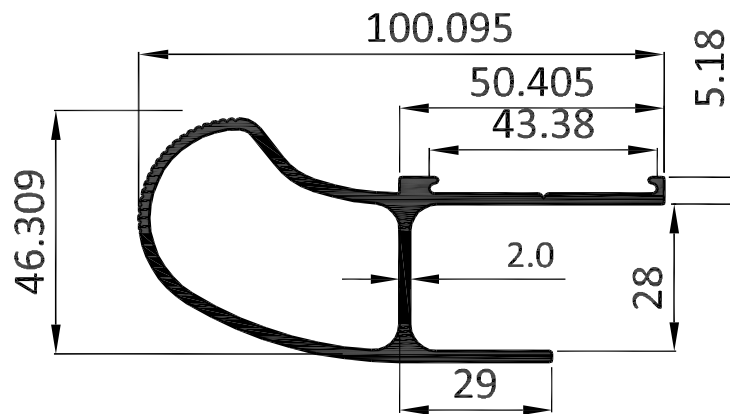

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8167   | 4.510 - 5.410 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XVIII

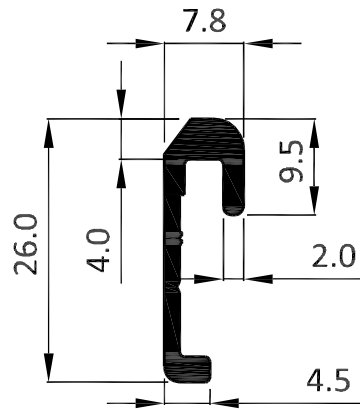

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8386   | 0.687 - 0.825 |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - XIX

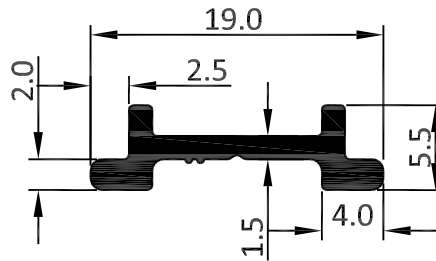


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8387   | 0.380 - 0.456 |

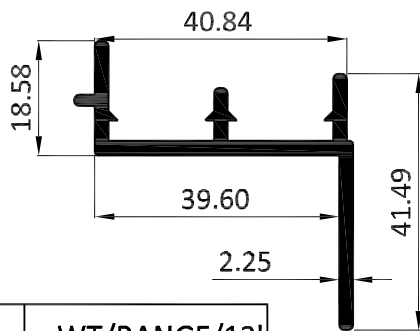


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8812   | 2.233-2.679  |

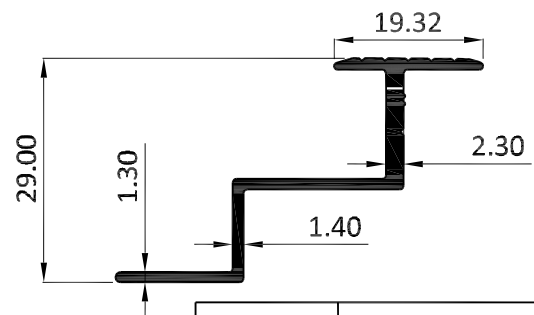

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8777   | 1.116-1.339  |

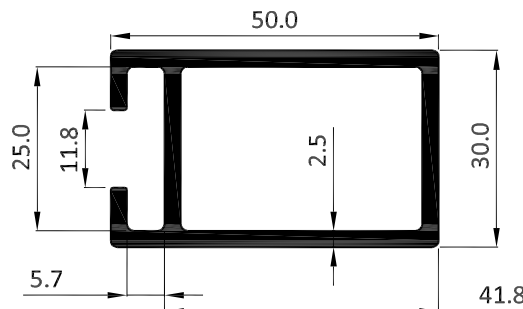

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8372   | 3.635 - 4.362 |

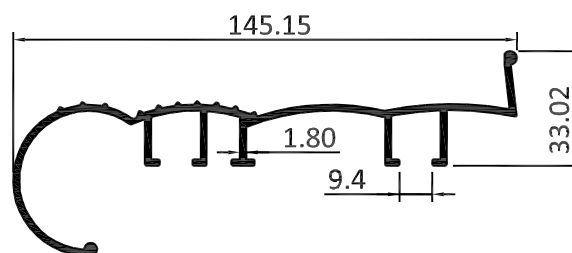

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6399   | 5.000 - 6.000 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT


PAGE 25 - XX

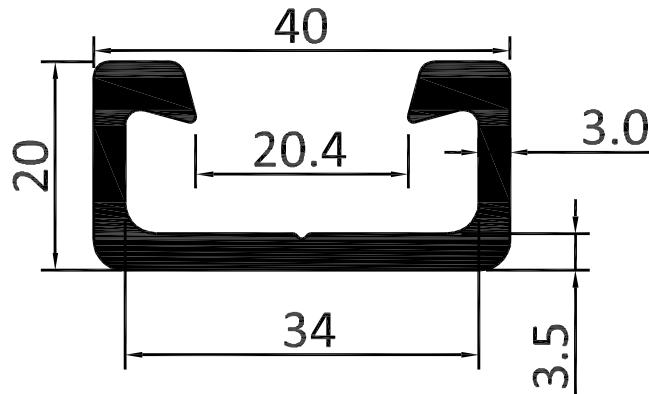

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8148   | 2.660 - 3.200 |

COMMERCIAL

COMMERCIAL

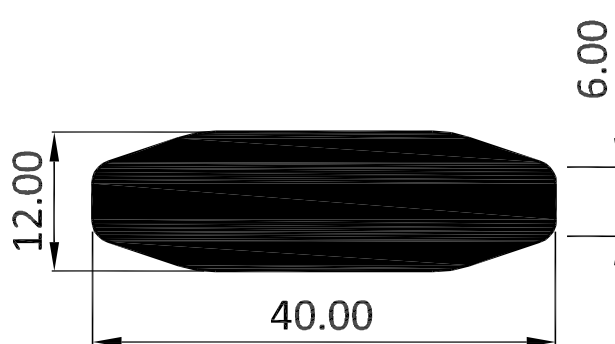

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6756   | 3.900 - 4.400 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XXI

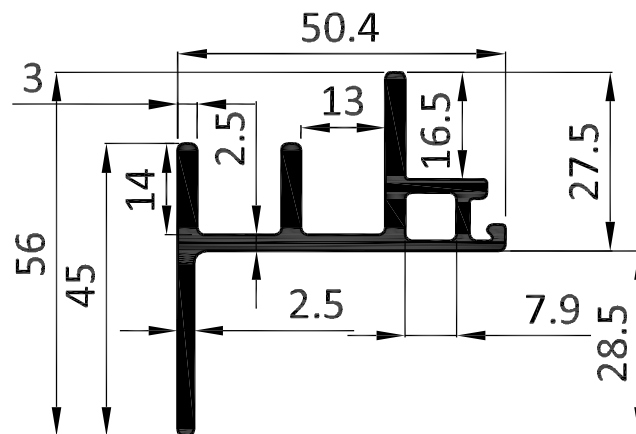

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8171   | 3.480 - 4.180 |


ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

TRANSPORT

PAGE 25 - XXII

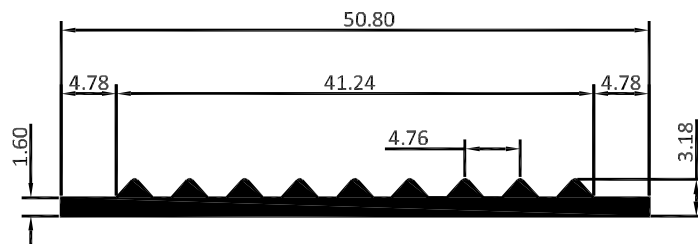

| SEC NO | WEIGHT(Kg/m) |
|--------|--------------|
| 4306   | 0.285        |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

TRANSPORT


PAGE 25 - XXIII

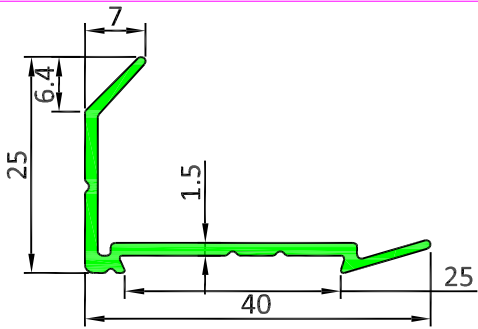


| SEC NO | WEIGHT(Kg/m) |
|--------|--------------|
| 7099   | 0.259        |

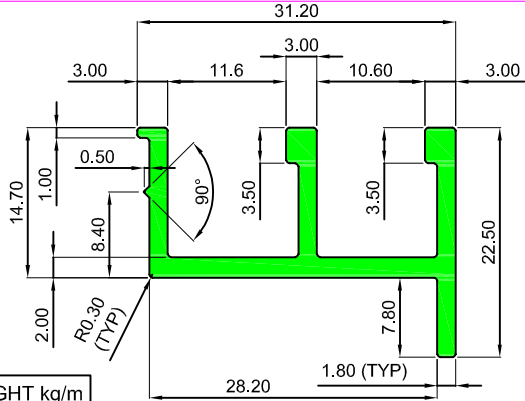


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7116  | 0.417       |

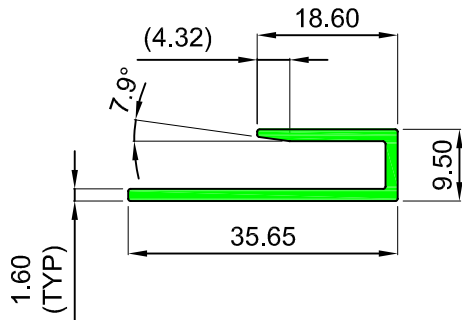

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7686  | 0.257       |

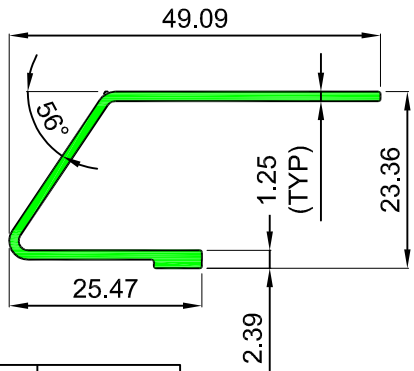

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7706  | 0.305       |

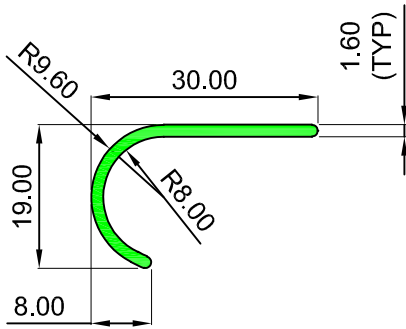

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7711  | 0.199       |

COMMERCIAL

COMMERCIAL






# KMC ALUMINIUM

ELEVATOR

PAGE 26 - I



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6342   | 4.310 - 5.175 |

COMMERCIAL

COMMERCIAL

ALL DIMENSIONS ARE IN MM



COMMON PROFILES - 1




COMMON PROFILES - 2




# KMC ALUMINIUM


## COMMON PROFILES - 3




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6581   | 3.400 - 4.450 |

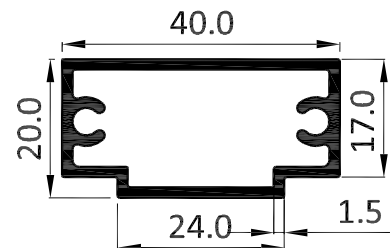


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 6582   | 1.800 - 2.200 |

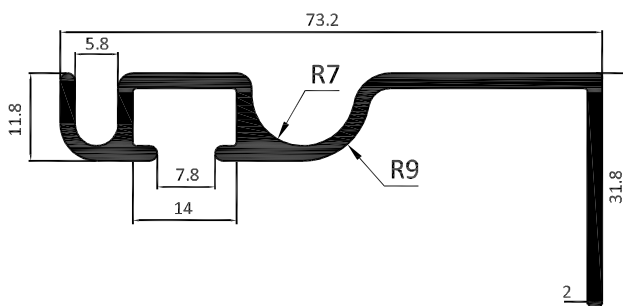


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6571   | 0.789           |

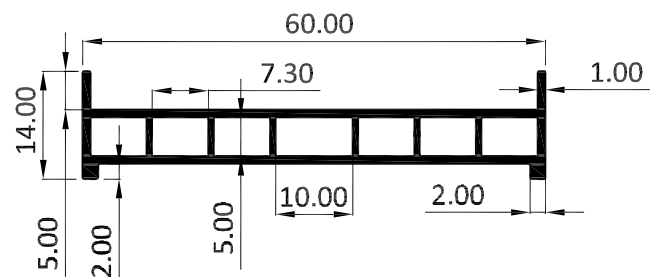


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16058  | 1.499 - 1.836 |

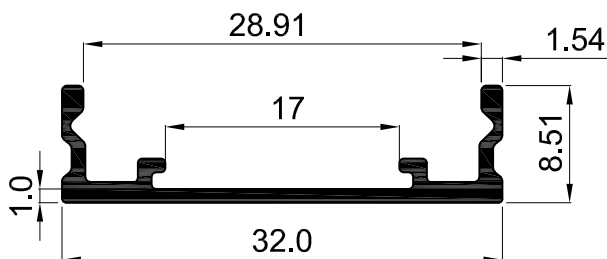


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K6967  | 0.164       |

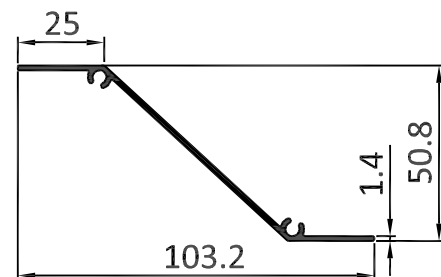

| SEC.NO | WEIGHT (kg/m) |
|--------|---------------|
| 4652   | 0.524         |

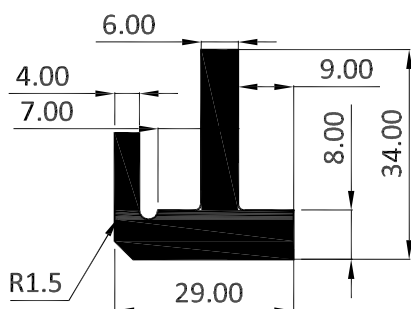

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8716   | 3.827 - 4.593 |




| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 8728   | 11.057 - 13.269 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 4




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8729   | 5.069- 6.083 |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8730   | 5.603- 6.723 |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8731   | 6.574- 7.889 |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8732   | 7.642- 9.170 |

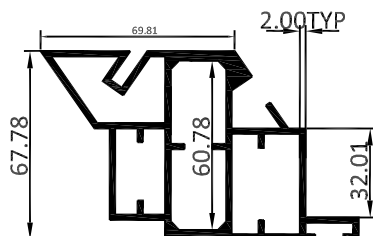


| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 8726   | 10.349- 12.419 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8727   | 9.634- 11.561 |

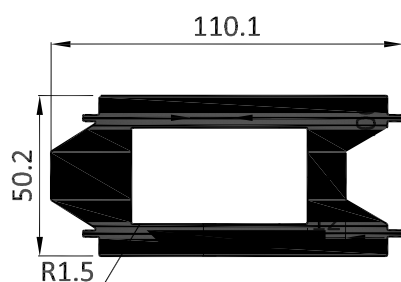

| SEC NO | WT/RANGE/ 7'    |
|--------|-----------------|
| 7432   | 15.440 - 18.530 |




| SEC NO | WT/RANGE/12'   |
|--------|----------------|
| 8728   | 11.057- 13.269 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 5




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7434   | 0.450 - 0.540 |

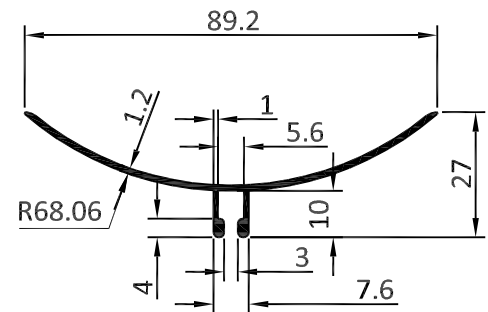


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6522   | 0.389         |

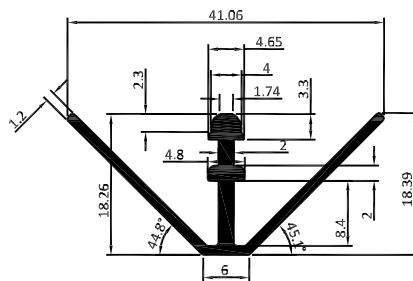


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6523   | 0.300         |

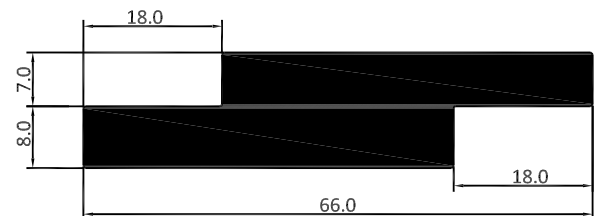


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8296   | 1.943         |

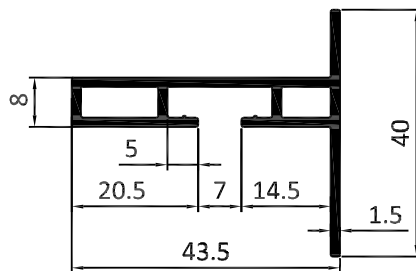


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6598   | 0.534         |

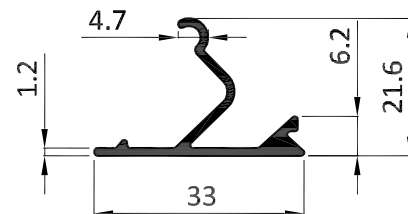

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6199   | 0.850-1.050  |

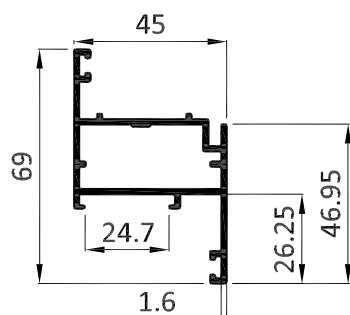

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6198   | 3.400-3.800  |

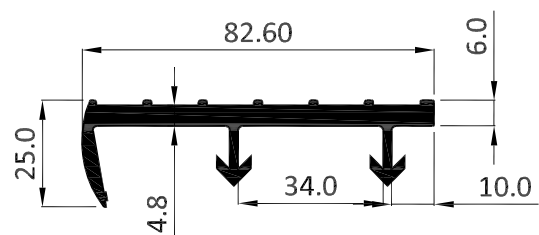


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 6388   | 5.00 - 5.800 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 6

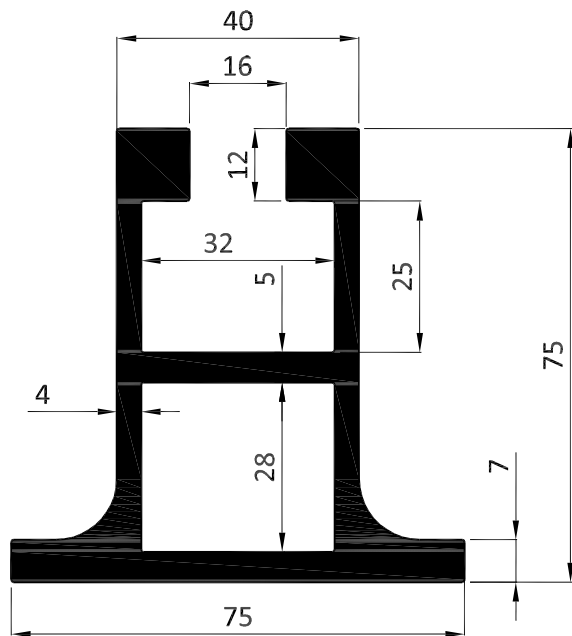


| SEC NO | WT/RANGE/12'    |
|--------|-----------------|
| 6565   | 13.140 - 14.520 |

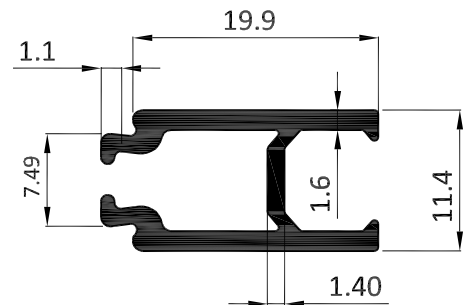


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8189   | 0.830 - 0.996 |

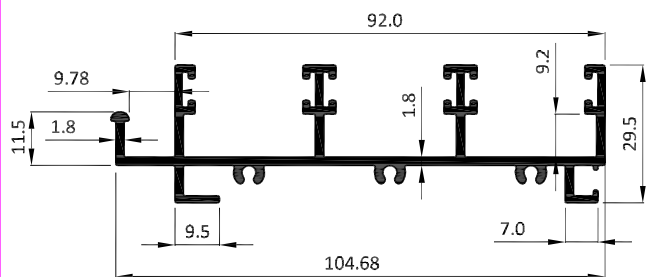

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3134   | 4.518 - 5.421 |

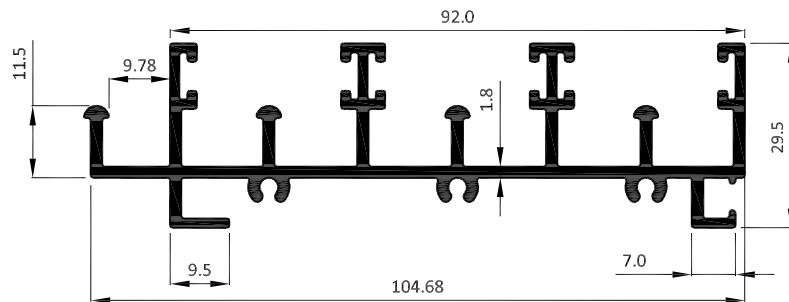

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 3135   | 5.060 - 6.072 |

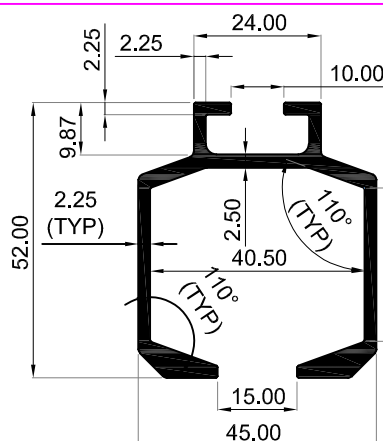


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7249  | 1.219       |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 7

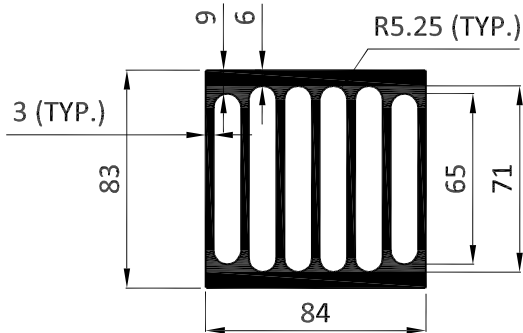

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6580  | 7.5             |

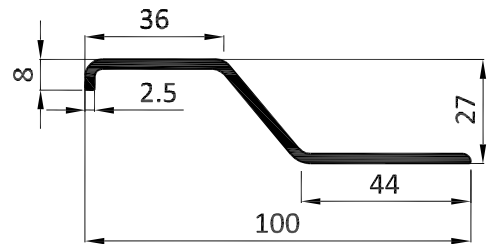


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8960   | 2.543 - 3.051   |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6982  | 0.690           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6983  | 1.965           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6984  | 0.905           |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8326   | 1.346 - 1.615 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8327   | 1.925 - 2.310 |

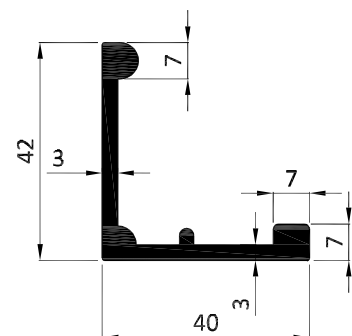

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6808  | 0.828           |


ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM


## COMMON PROFILES - 8

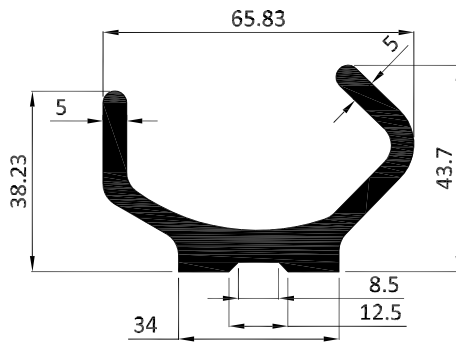


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6814  | 1.897           |

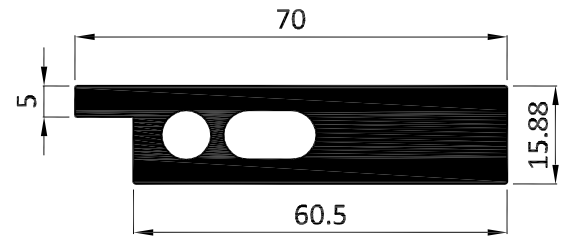


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6904   | 2.307        |

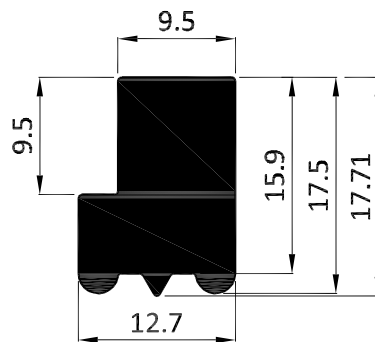

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6905   | 0.493        |


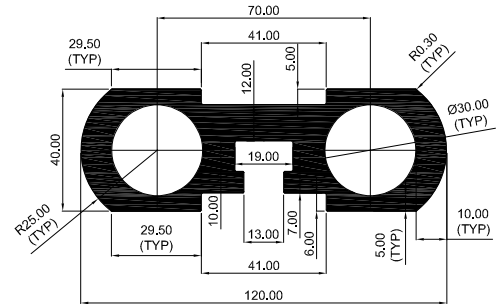


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7154  | 6.612       |

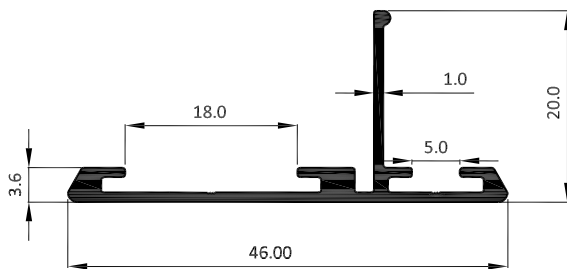


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8673   | 0.866 - 1.039 |

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8674   | 1.308 - 1.570 |

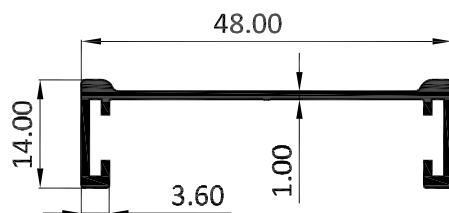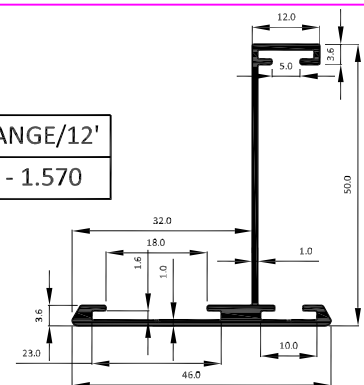

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8700   | 0.830- 0.996 |

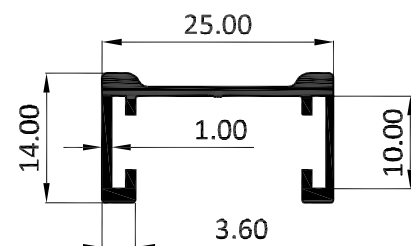


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8701   | 0.648- 0.778 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 9

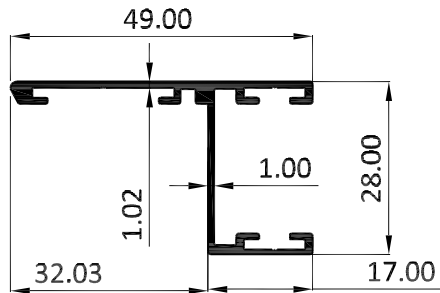


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8702   | 1.205 - 1.446 |

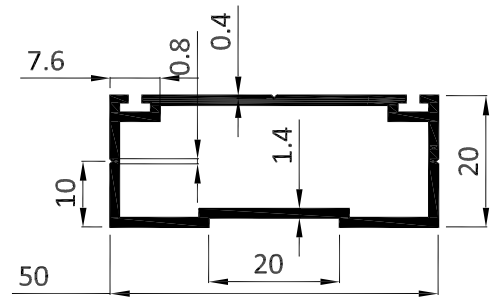


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8771   | 1.811 - 2.214 |

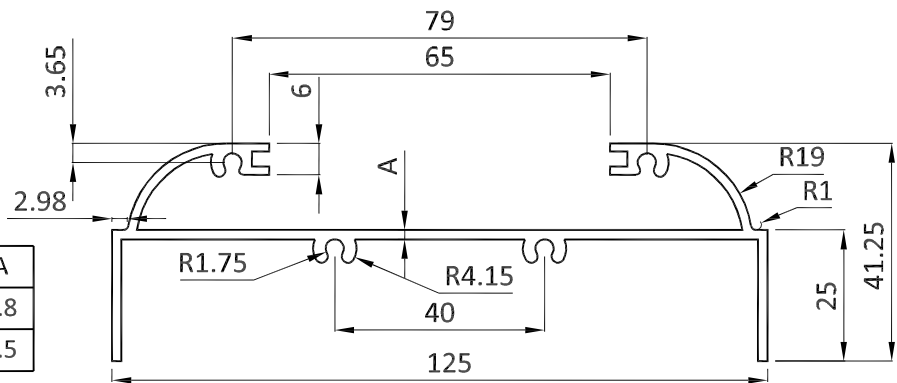


| SEC NO | WT/RANGE/12'  | A   |
|--------|---------------|-----|
| 8770   | 4.661 - 5.697 | 1.8 |
| 8770A  | 4.088 - 4.996 | 1.5 |

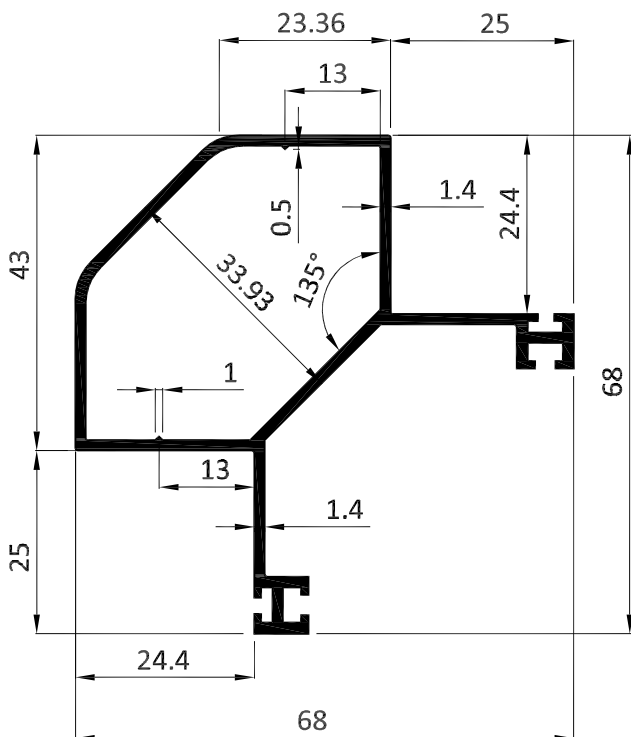

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8772   | 3.376 - 4.126 |

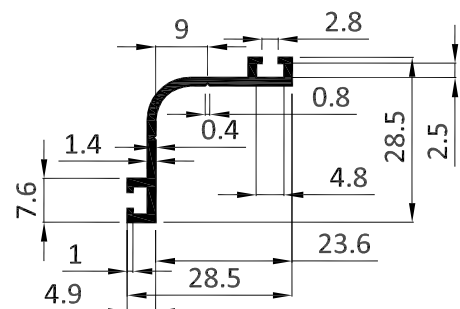

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8773   | 0.774 - 0.95 |

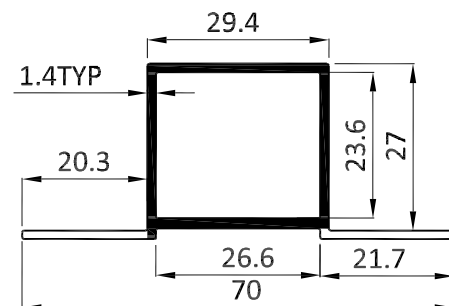


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8793   | 1.943 - 2.375 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 10

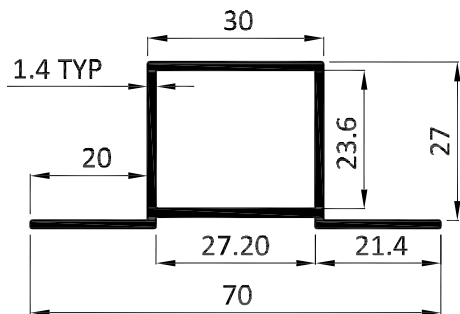


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8793A  | 1.881 - 2.299 |

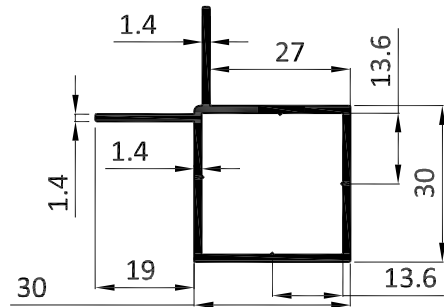


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8794   | 1.895 - 2.316 |

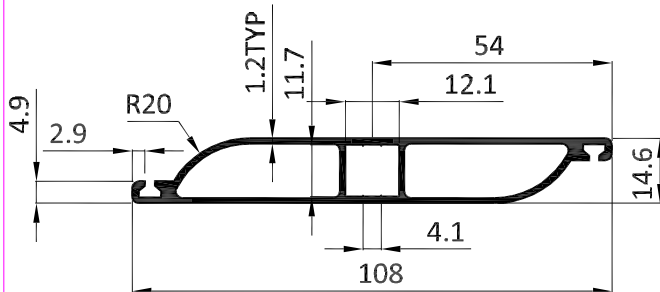


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8795   | 2.911 - 3.559 |

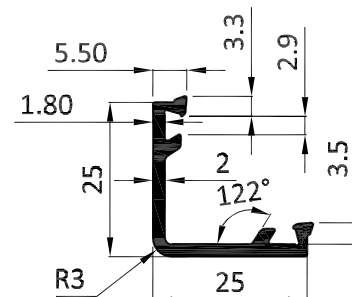

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8890   | 1.08 - 1.32  |

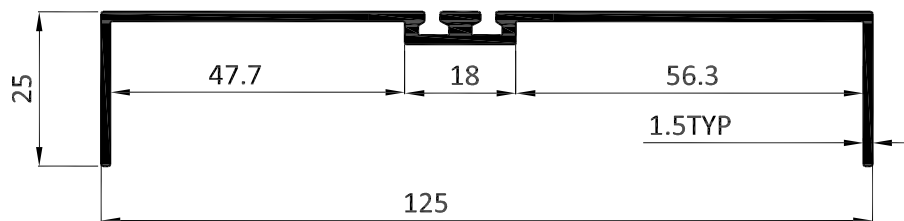

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8796   | 2.646 - 3.234 |

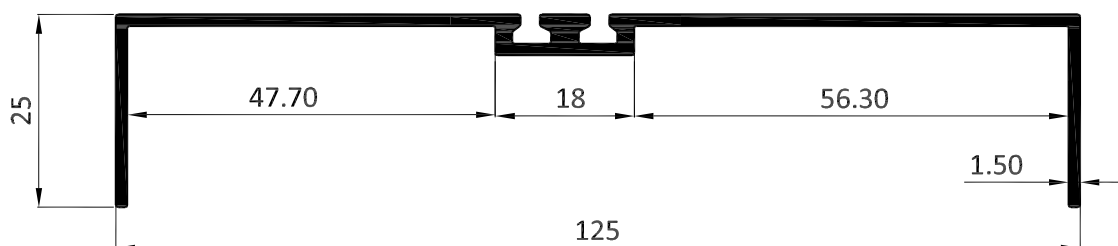


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8796A  | 0.803           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 11

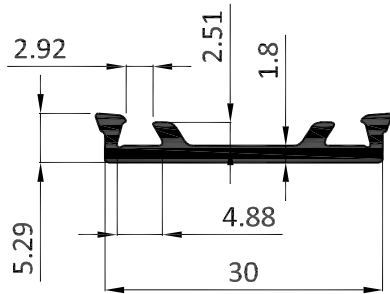


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8920   | 0.711 - 0.870 |

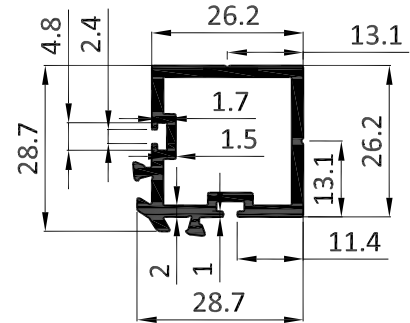


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8889   | 2.07 - 2.53  |

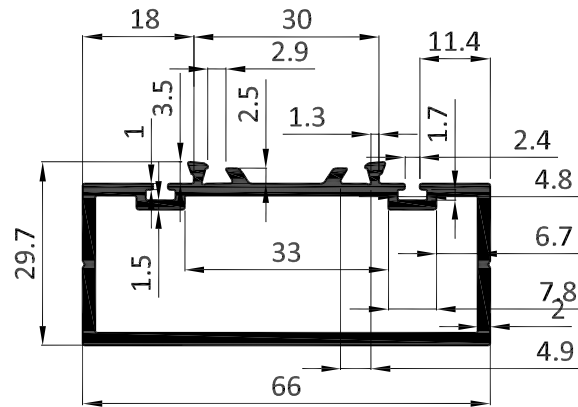

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8888   | 3.51 - 4.29  |

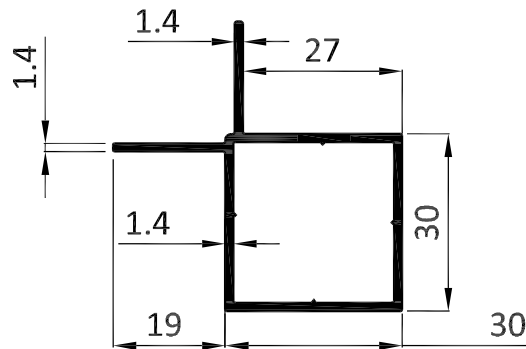

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8794A  | 0.575           |

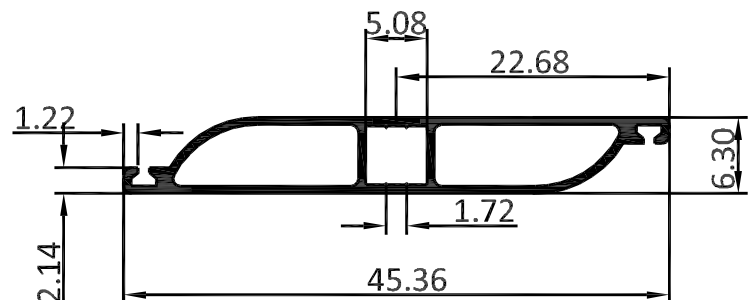


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8844   | 1.004           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 12

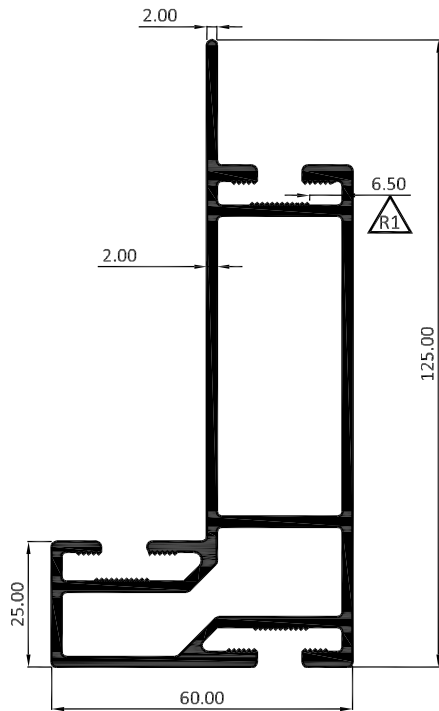


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| K6990  | 2.468         |

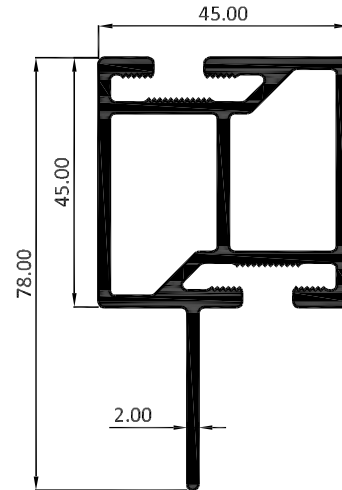

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 6991   | 1.677         |

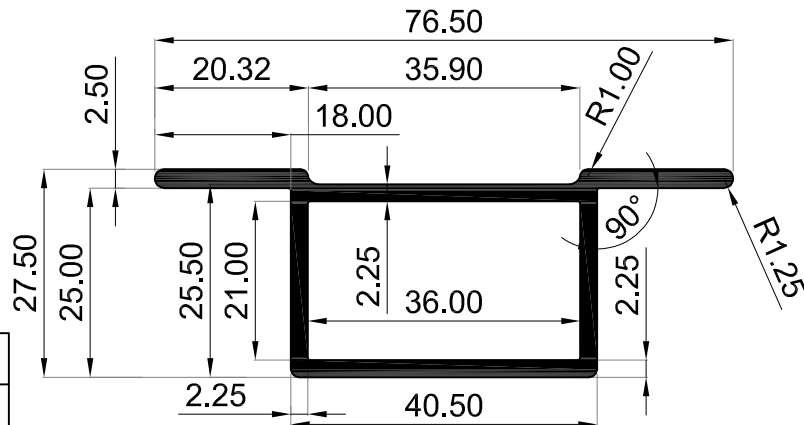

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7042  | 1.015       |

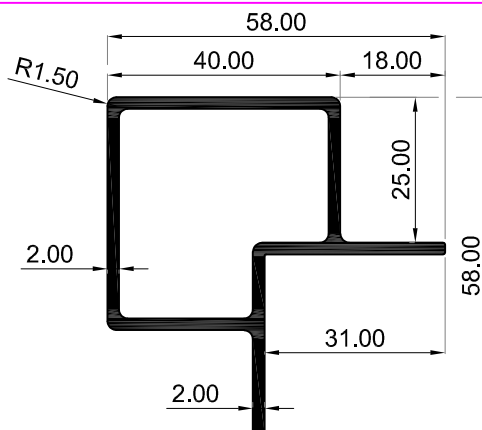


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7043  | 1.023       |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 13

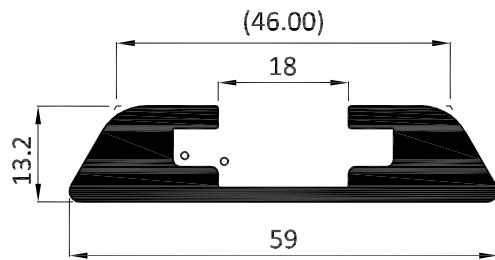


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| K6970  | 1.170         |

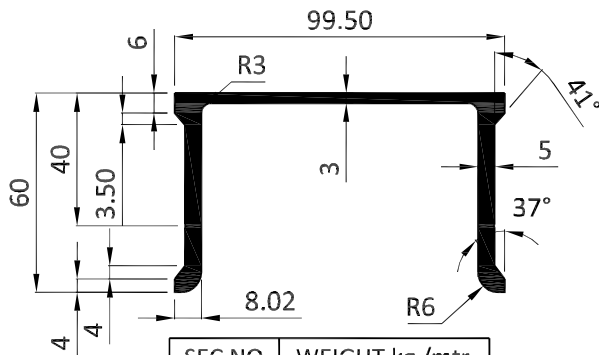


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6575  | 2.5             |

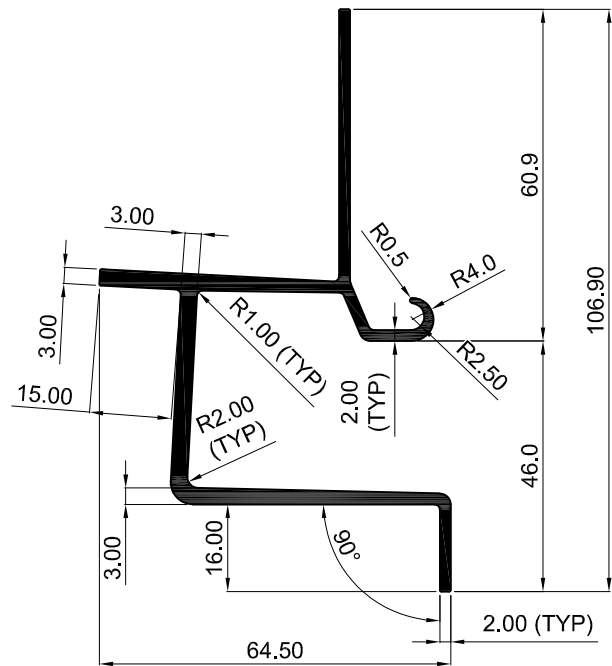


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7313  | 1.488       |

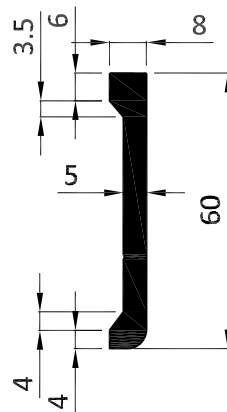


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6517  | 0.915           |

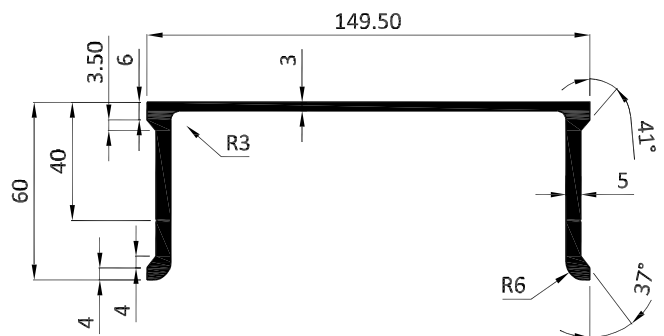

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6576  | 2.903           |

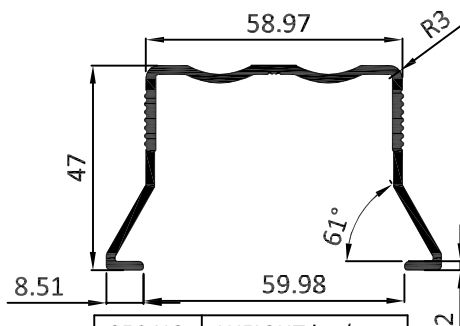

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6518  | 0.924           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6519  | 0.657           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 14




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6520  | 0.869           |

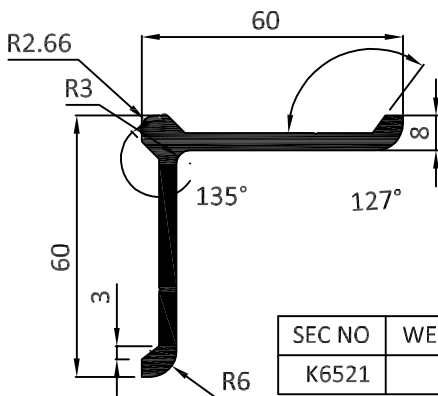


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6521  | 1.337           |

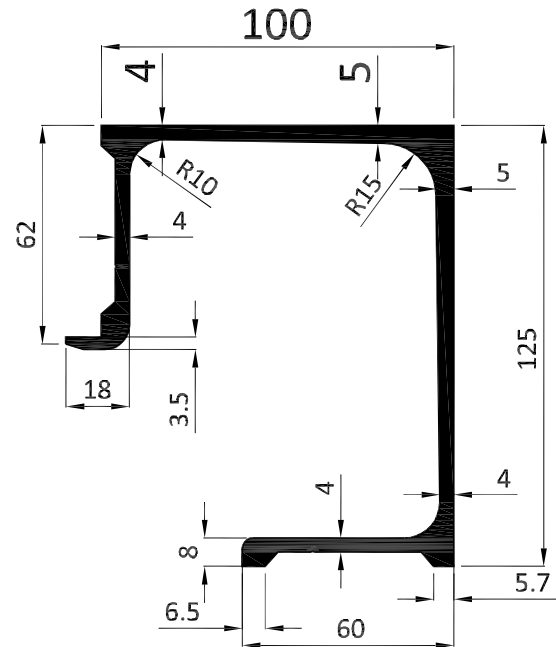

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8864   | 4.510           |

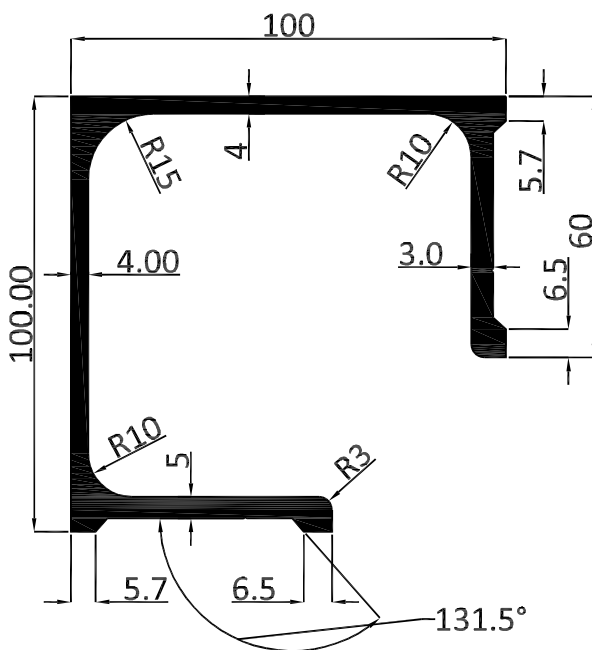

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8866   | 4.040           |

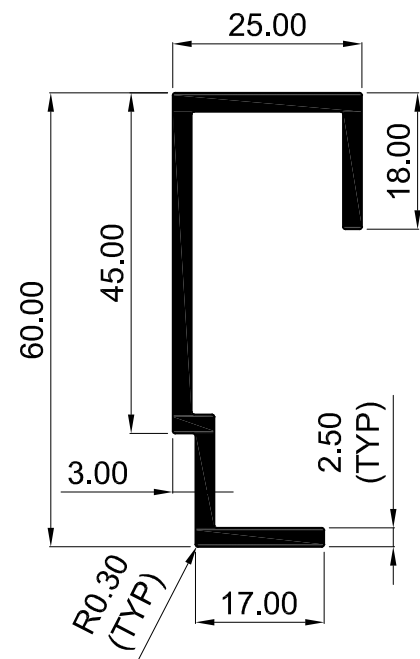


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7358  | 0.79        |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 15

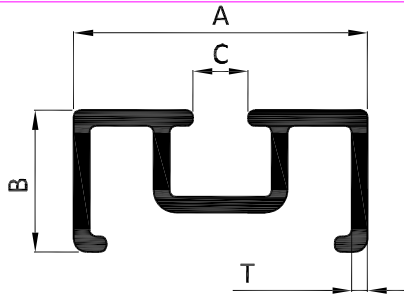


| SEC NO | A     | B     | C    | T    | WEIGHT kg /mtr. |
|--------|-------|-------|------|------|-----------------|
| 6407   | 46.50 | 10.80 | 4.20 | 1.20 | 0.271           |
| 6408   | 21.50 | 10.80 | 4.20 | 1.20 | 0.190           |

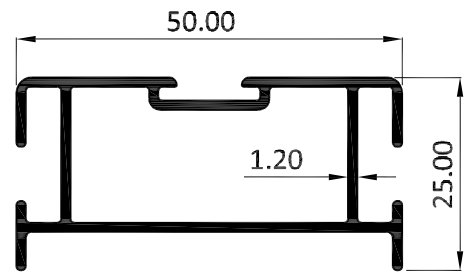


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6401   | 0.567           |

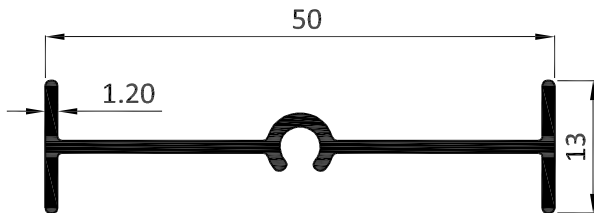


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6402   | 0.262           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6403   | 0.354           |

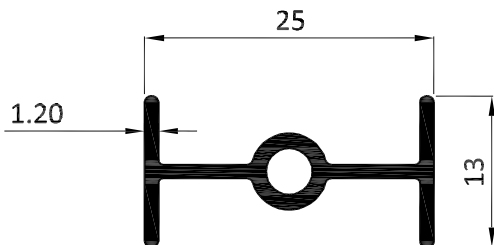


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6404   | 0.194           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6405   | 0.326           |

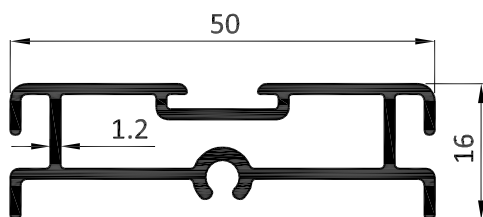

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6406   | 0.505           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6411   | 0.377           |


ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM


## COMMON PROFILES - 16




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6413   | 0.408           |

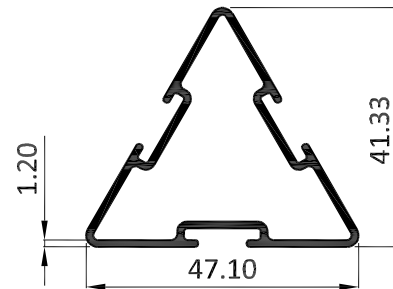


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6412   | 0.549           |

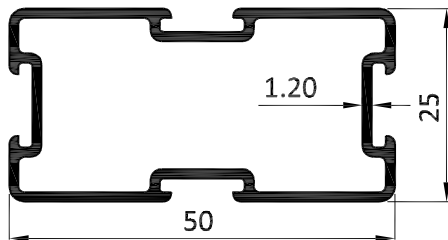


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6414   | 0.595           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6415   | 0.756           |

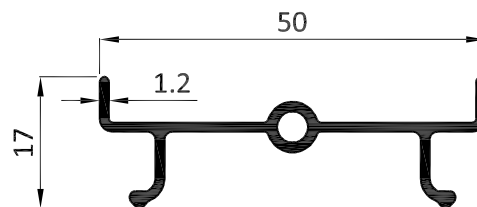

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6418   | 0.317           |

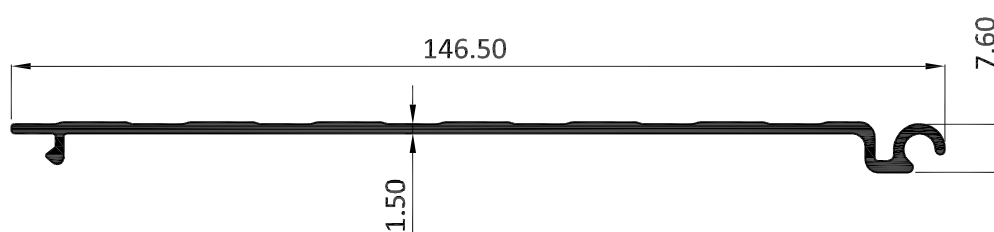


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6417   | 0.725           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 17

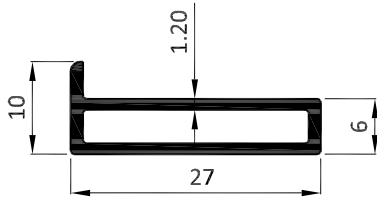


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6420   | 0.213           |

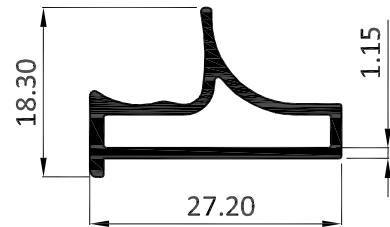


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6421   | 0.243           |

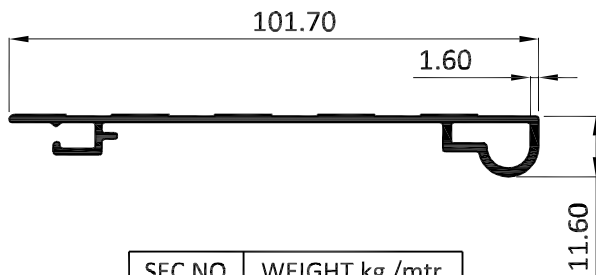


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6422   | 0.573           |

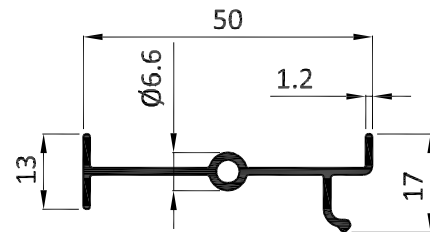


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6409   | 0.294           |

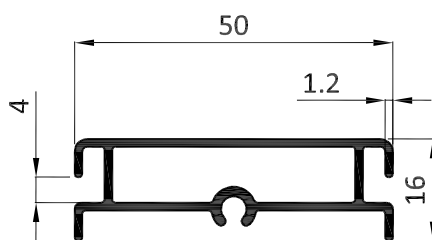


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6423   | 0.472           |

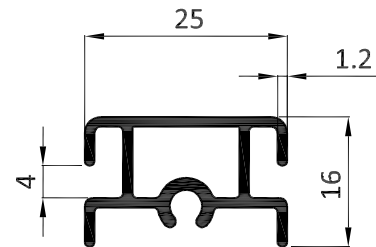

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6424   | 0.310           |

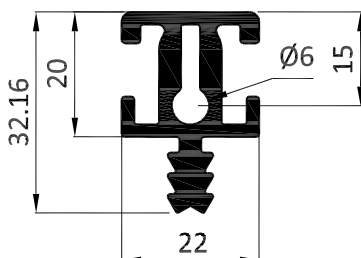

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6314   | 0.770           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6315   | 0.466           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 18

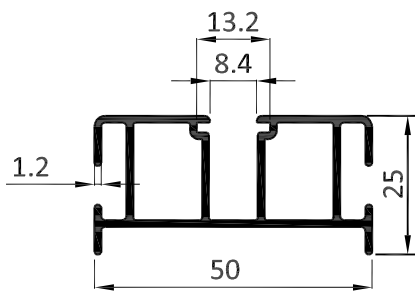


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6425   | 0.635           |

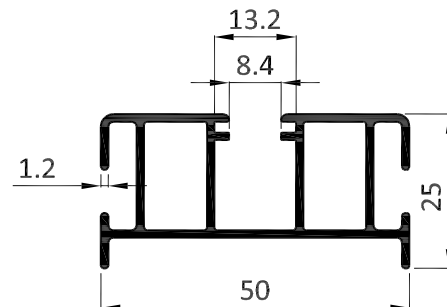


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6426   | 0.639           |

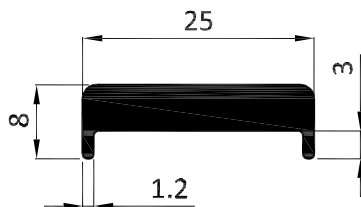


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6427   | 0.354           |

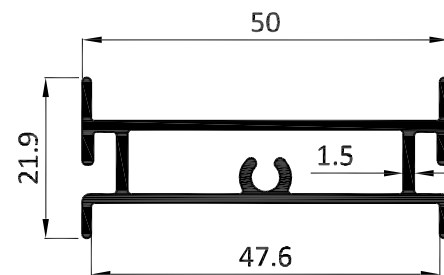


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8862   | 0.553           |

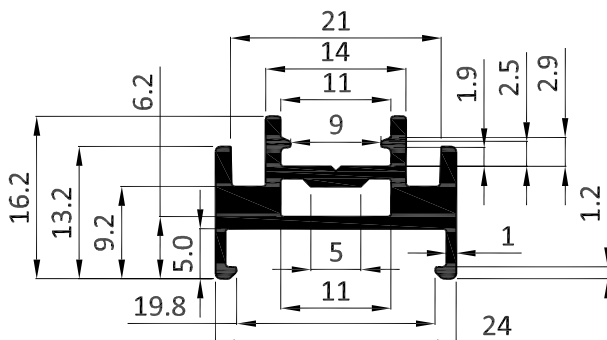


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8351   | 0.359           |

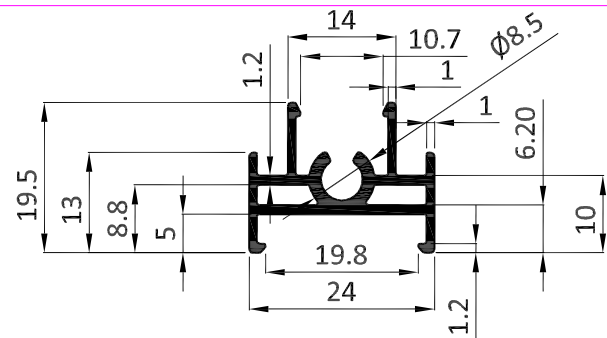

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8352   | 0.314           |

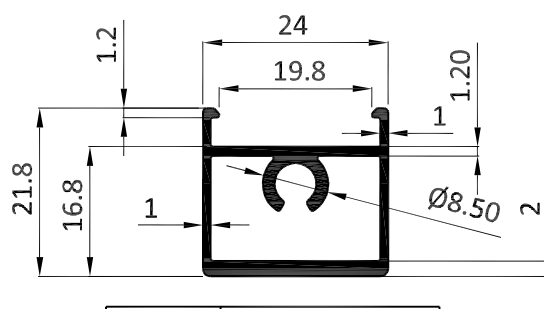

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8353   | 0.385           |

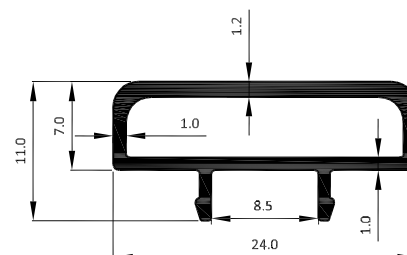


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8354   | 0.189           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 19

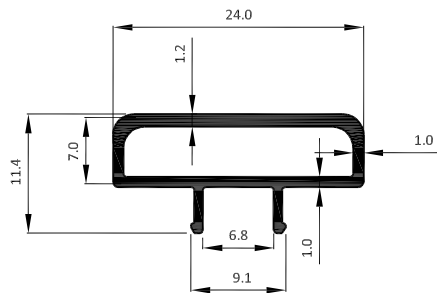


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8355   | 0.189           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8371   | 0.328           |

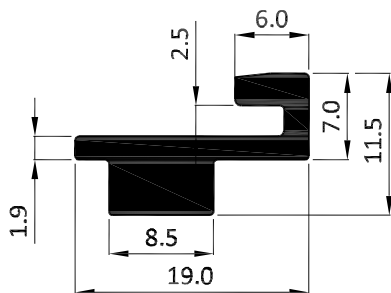


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8370   | 0.255           |

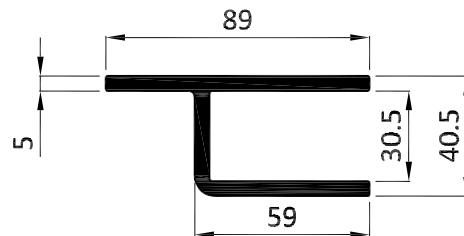


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8641   | 2.384           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8677   | 1.062           |

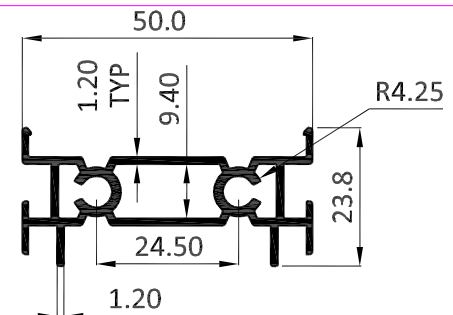

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8678   | 0.632           |

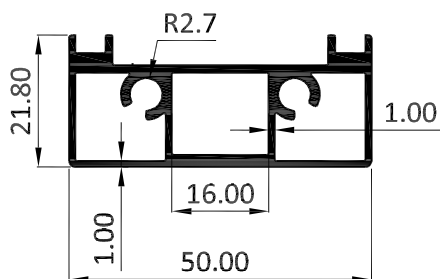

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8679   | 0.732           |

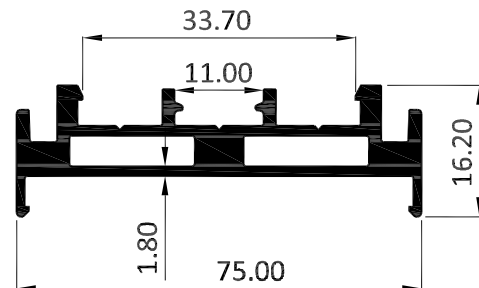


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8680   | 0.639           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 20

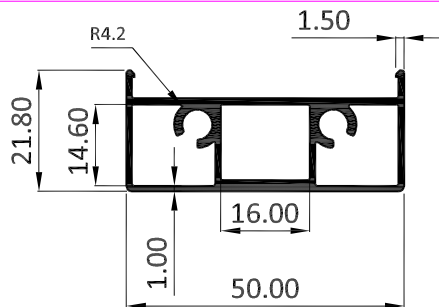


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8681   | 2.131 - 2.557 |

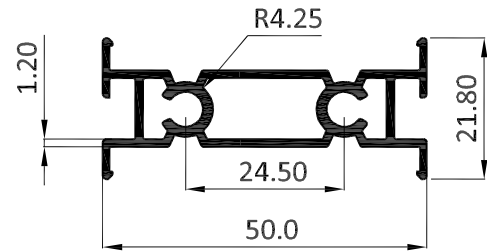


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8682   | 1.722 - 2.067 |

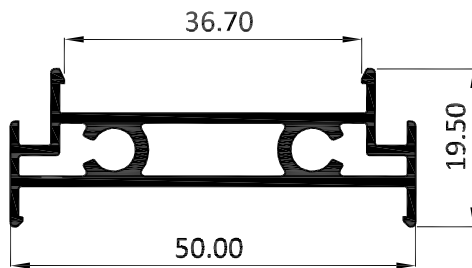


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8683   | 1.854 - 2.225 |

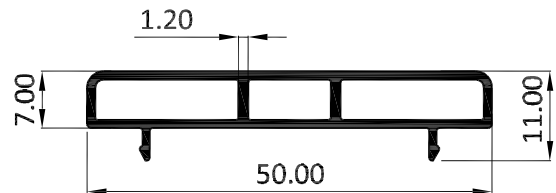


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8684   | 1.143 - 1.371 |

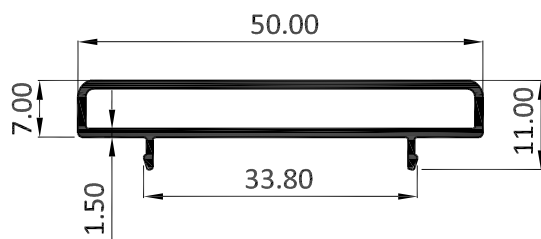


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8685   | 1.027 - 1.233 |

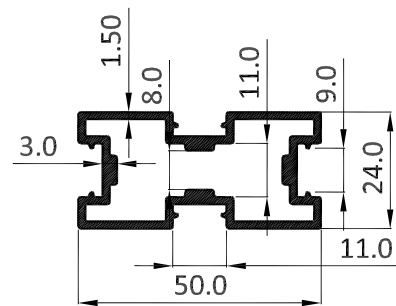

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8686   | 2.803 - 3.425 |

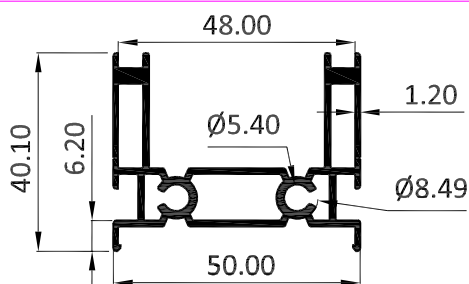

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8979   | 3.037 - 3.644 |

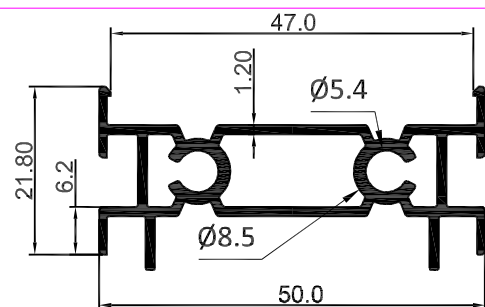


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8980   | 2.078 - 2.494 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 21

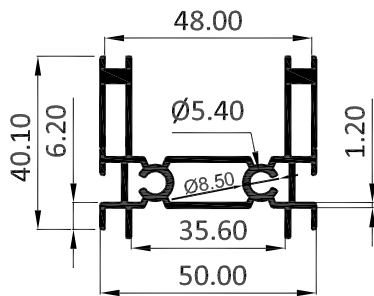


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8981   | 3.178 - 3.814 |

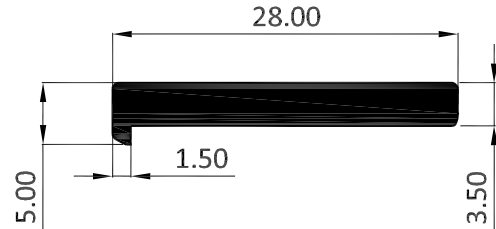


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16000  | 0.886 - 1.063 |

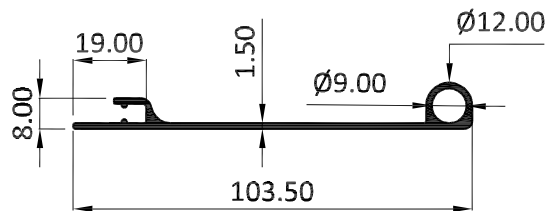


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16001  | 2.032 - 2.438 |

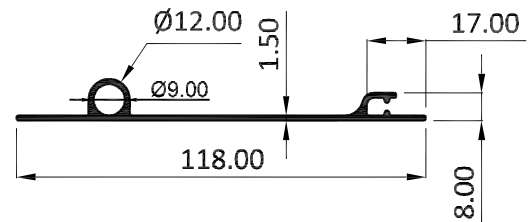


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16002  | 2.249 - 2.699 |

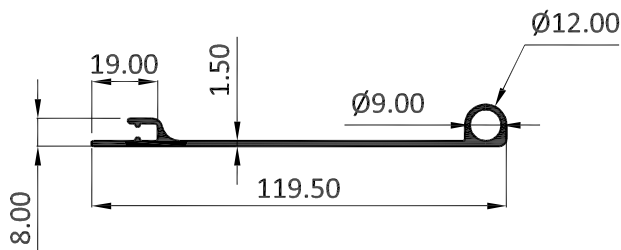


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16003  | 2.246 - 2.695 |

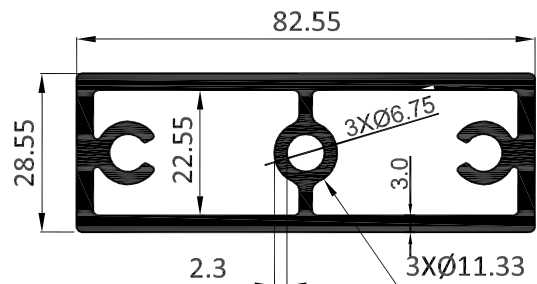

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8931   | 7.474 - 8.968 |

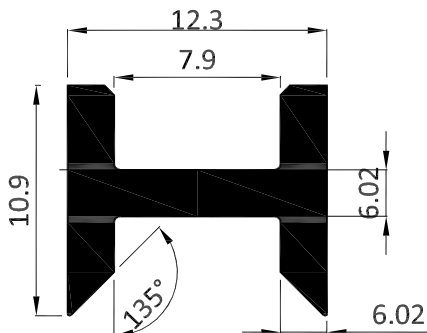

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6470  | 0.165           |

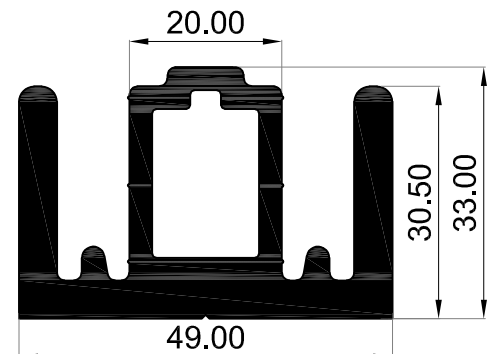


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7068  | 2.218       |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 22

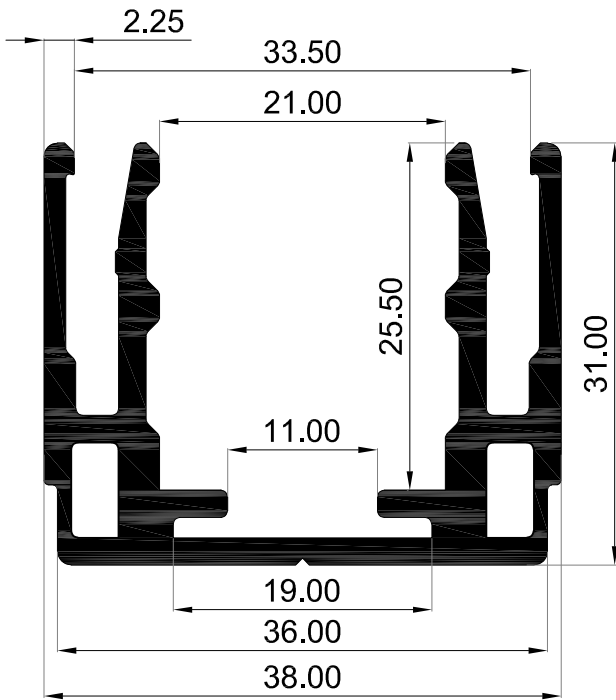


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7069  | 0.947       |

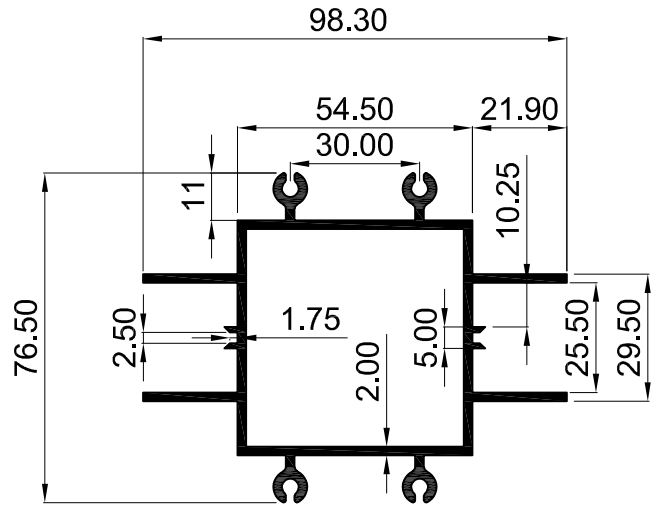


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7049  | 2.104       |

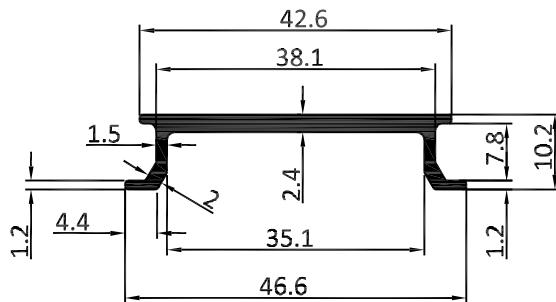


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 6836   | 0.355        |

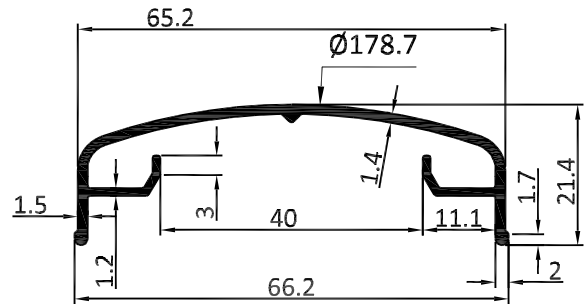

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6835   | 0.463           |



| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 6837   | 0.078        |

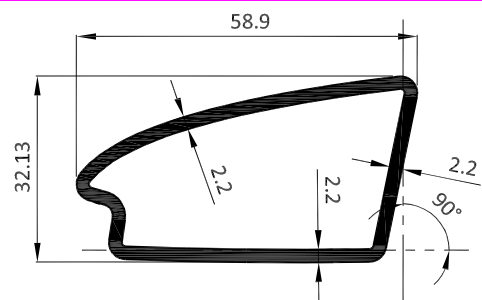


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8323   | 2.945 - 3.534 |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 23




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16044  | 0.677 - 0.828 |

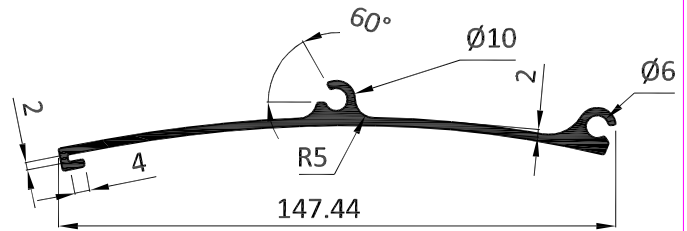


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16045  | 3.805 - 4.649 |

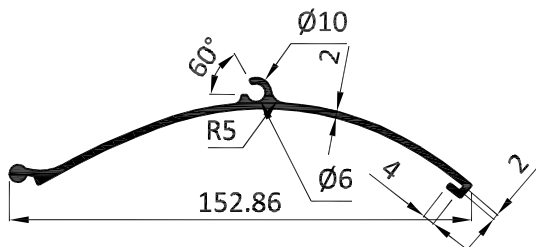


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 16046  | 3.633 - 4.441 |

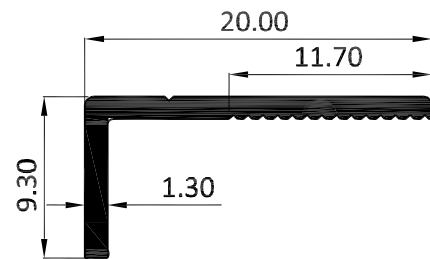


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8900   | 0.312 - 0.375 |

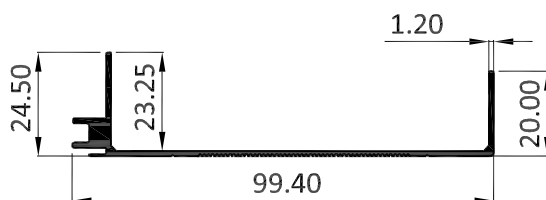


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8901   | 1.666 - 2.000 |

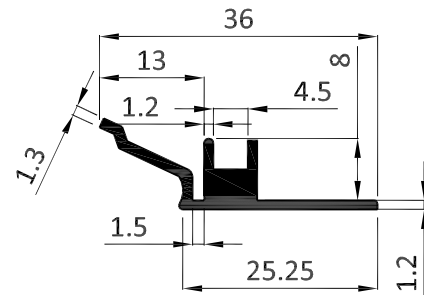

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8902   | 0.790 - 0.948 |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8883   | 1.067-1.280  |

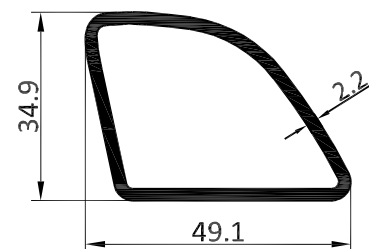

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8359   | 0.799           |


ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM


## COMMON PROFILES - 24

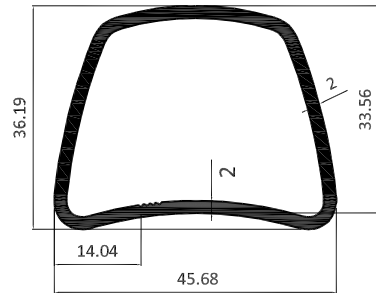


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 6573   | 0.733        |

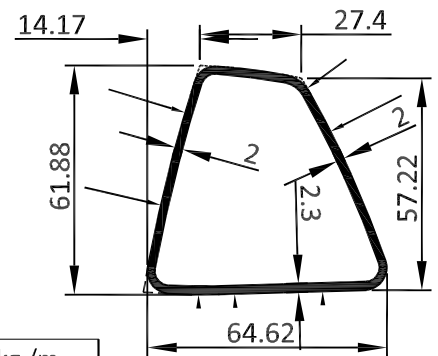


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 8204   | 1.151        |

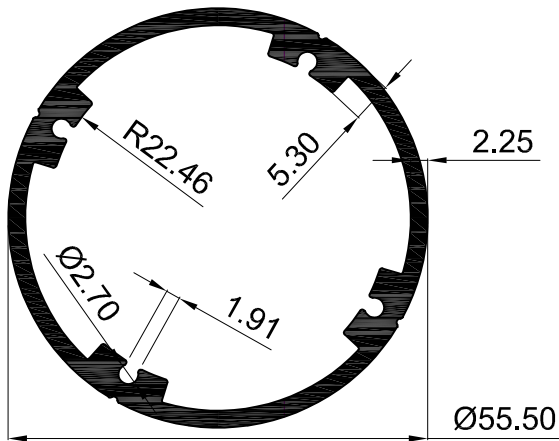


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7058  | 1.316       |

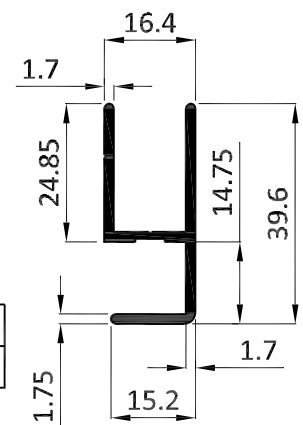


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6618   | 0.410        |

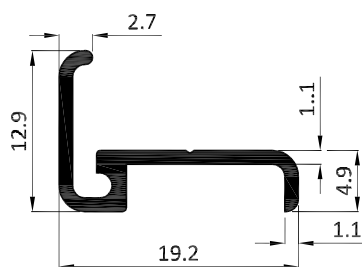


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6617   | 0.120        |

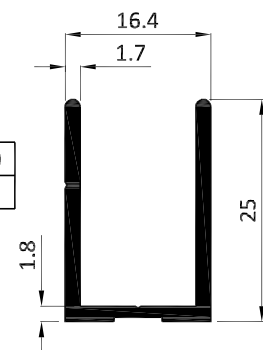

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6619   | 0.283        |

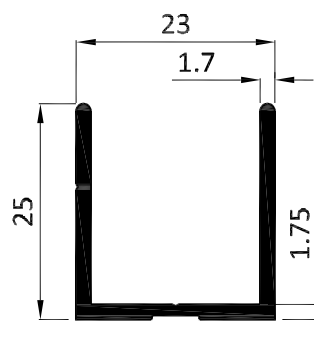

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6620   | 0.314        |

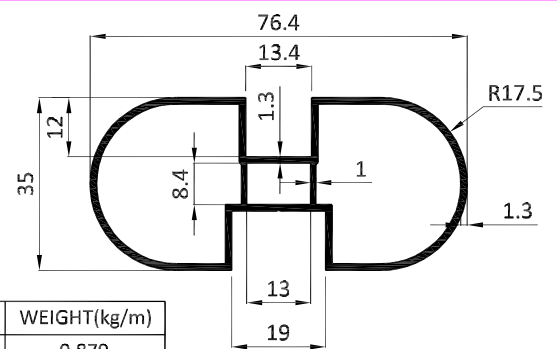








| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6621   | 0.879        |

ALL DIMENSIONS ARE IN MM



# KMC ALUMINIUM

## COMMON PROFILES - 25

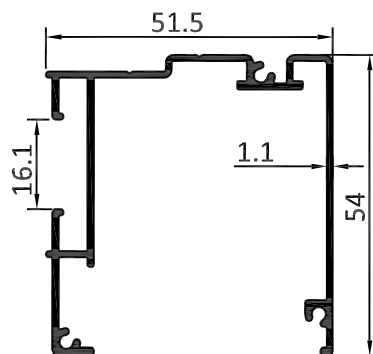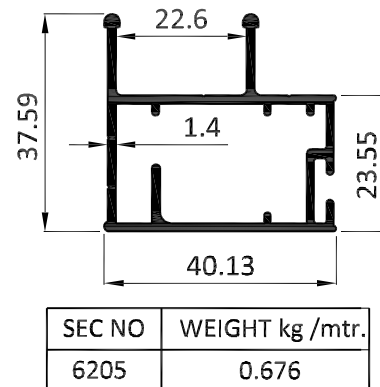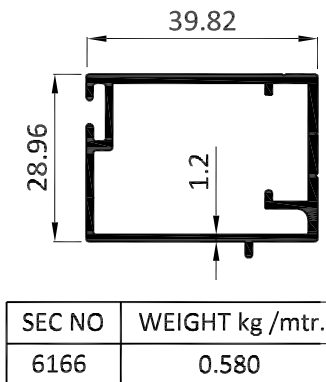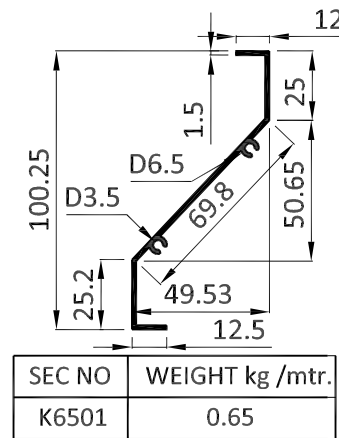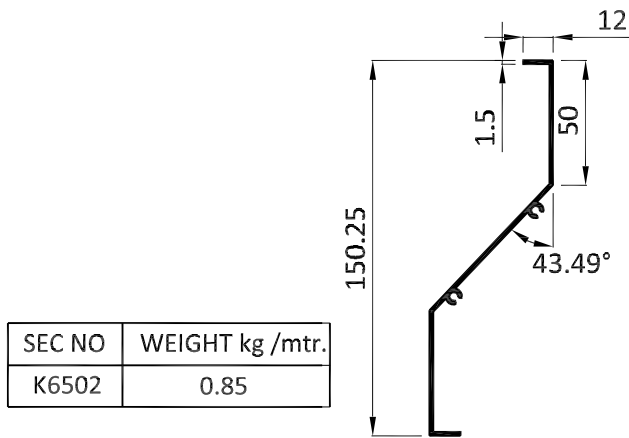


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

MESH


COMMON PROFILES - 26




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6228   | 0.321           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6521   | 0.248           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7411   | 0.624           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7412   | 0.185           |

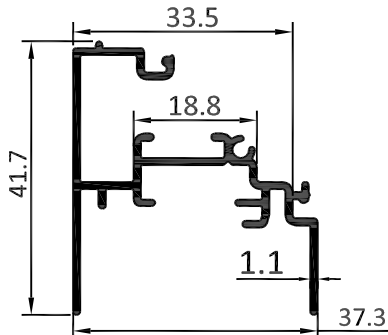


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7413   | 0.474           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7414   | 0.323           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7415   | 0.264           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7416   | 0.197           |


EXCLUSIVE

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 27

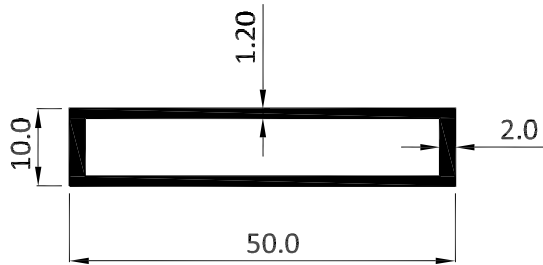


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8392   | 1.343 - 1.611 |

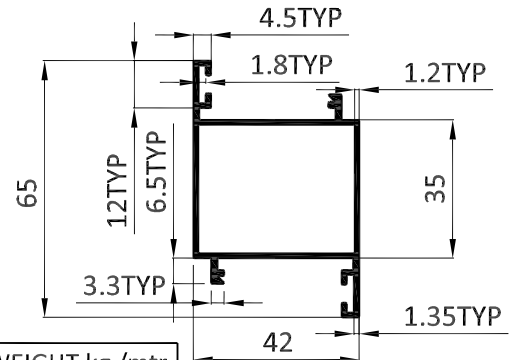


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16022  | 0.753           |

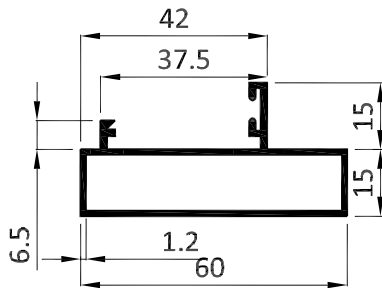


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6467  | 0.604           |

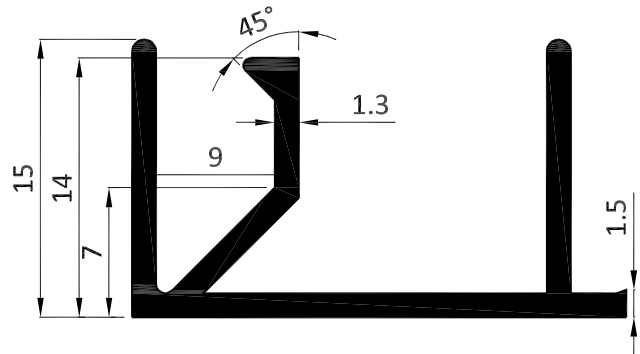


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6468  | 0.249           |

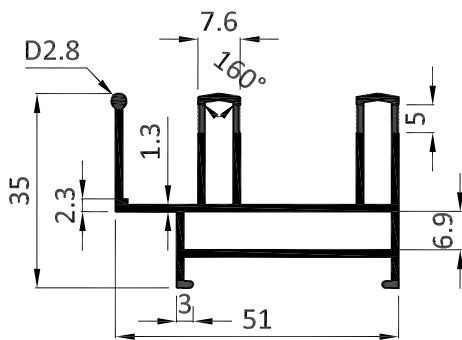


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6504  | 0.771           |

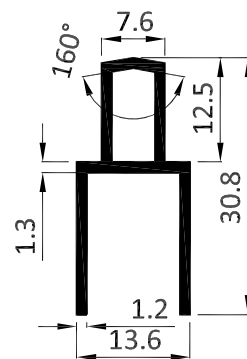

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6528  | 0.253           |

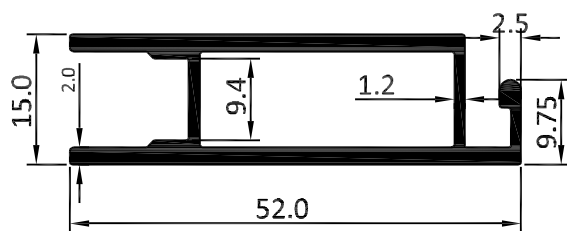

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8191   | 0.616           |

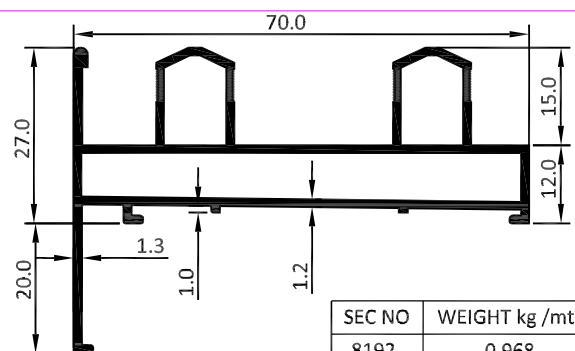


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8192   | 0.968           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 28

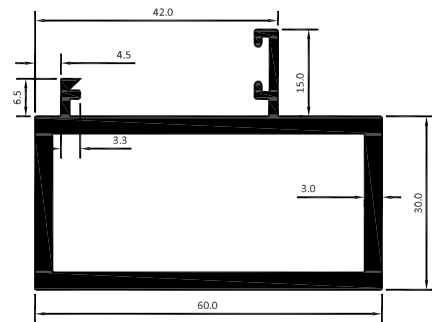


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7465   | 1.484           |

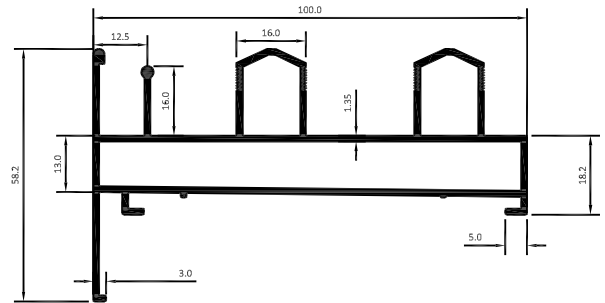


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8267   | 1.4649          |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7466   | 0.224           |

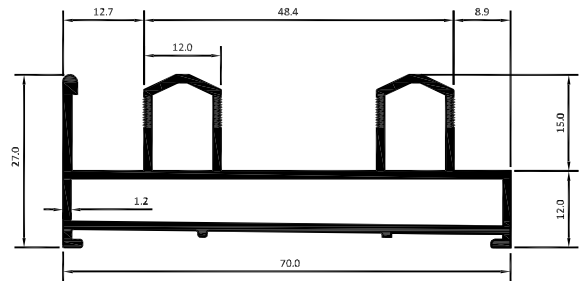


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8266   | 0.880           |

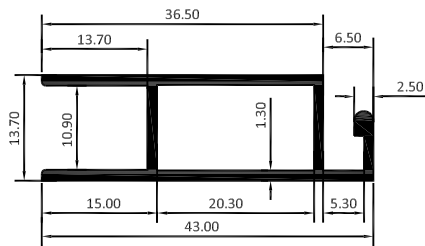


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8843   | 0.409           |

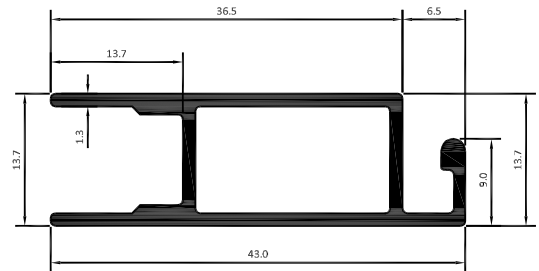

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8604   | 0.413           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8687   | 0.291           |

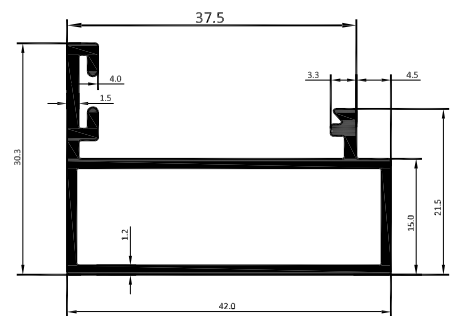


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8669   | 0.508           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 29

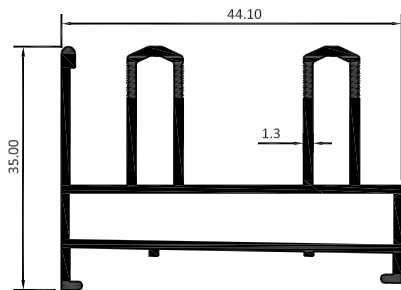


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8688   | 0.784           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8736   | 0.154           |

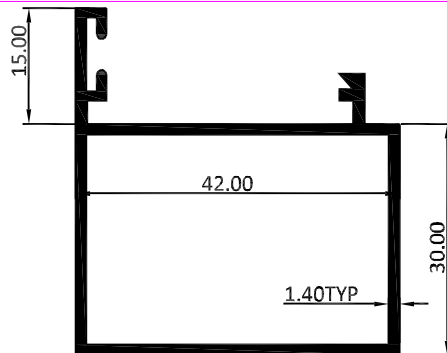


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8692   | 0.653           |

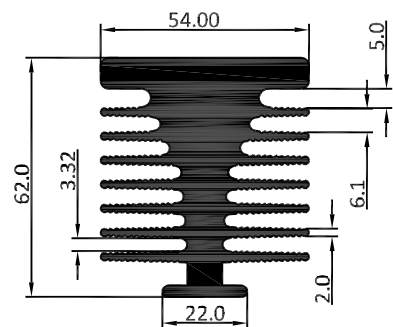


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6642   | 4.994           |

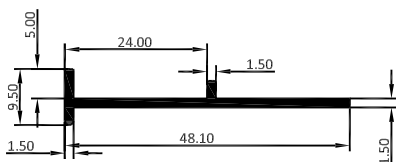


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8800   | 0.238           |

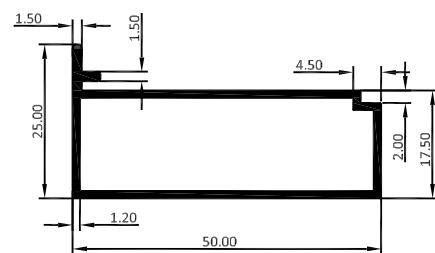

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8801   | 0.483           |

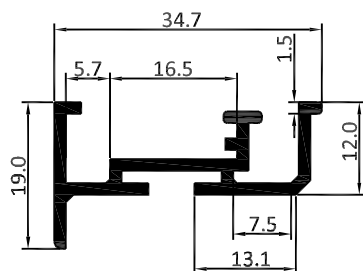

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8847   | 0.365           |

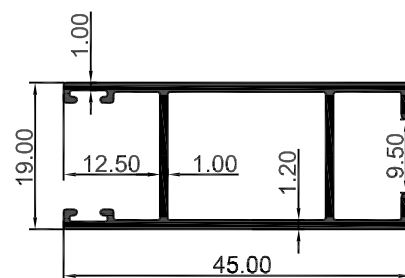


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8984   | 0.418           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 30

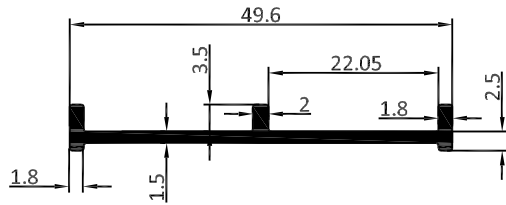


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| 8910    | 0.263        |

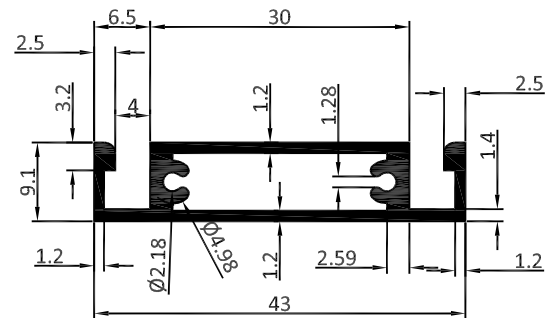


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6601   | 0.427        |

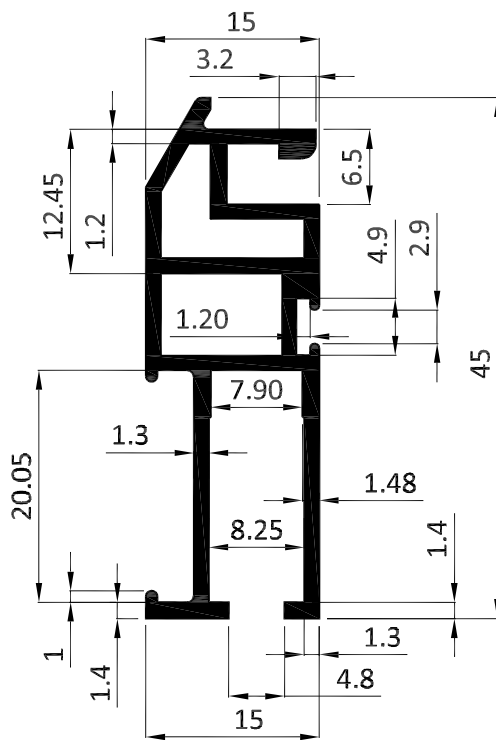


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6600   | 0.521        |

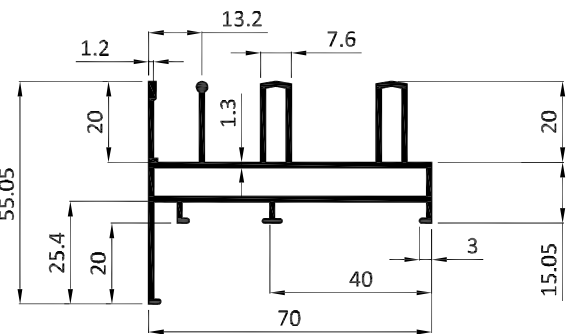

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6670   | 1.143        |

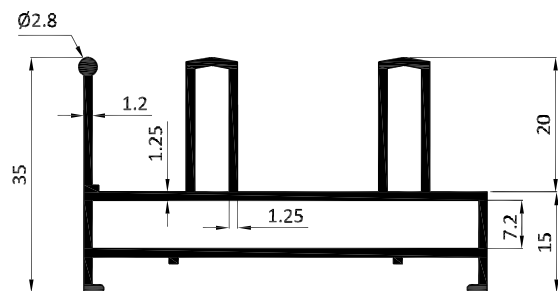

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6668   | 0.882        |

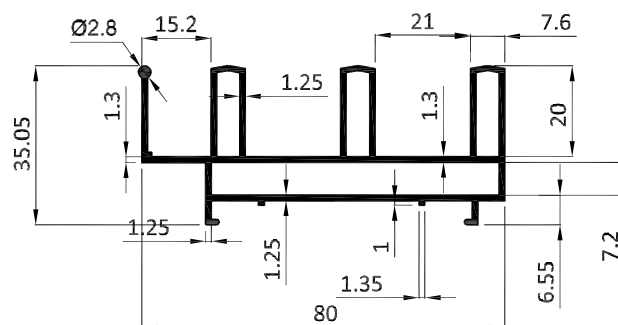


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6669   | 1.125        |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 31

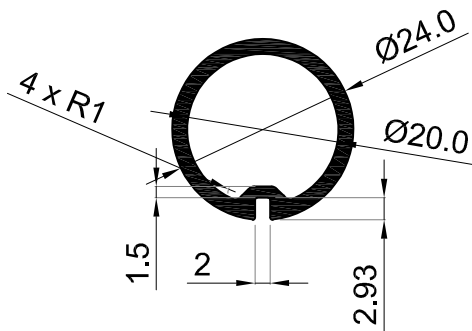


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K6951  | 0.392       |

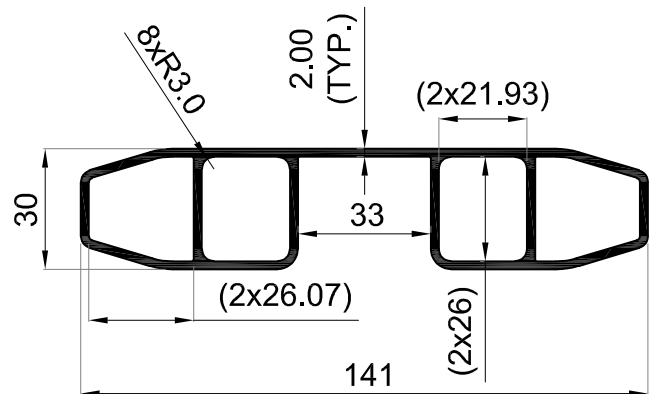


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K6952  | 2.255       |

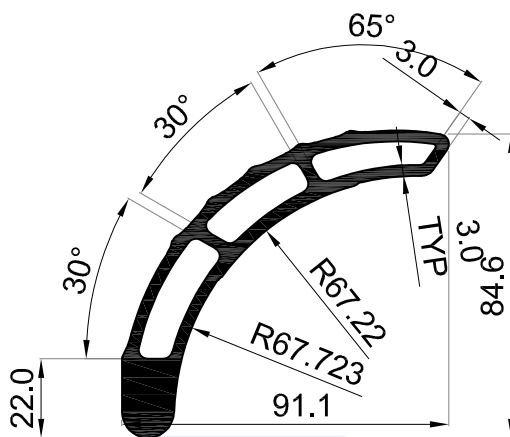


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K6989  | 2.946       |

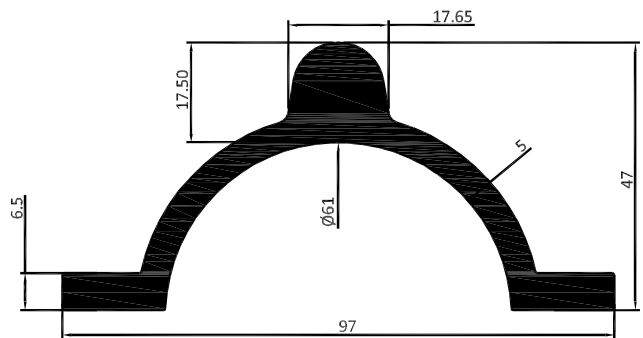

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8961   | 2.335           |

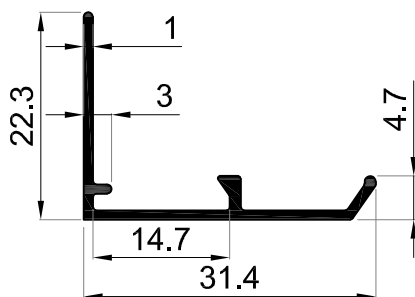

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7009  | 0.170       |

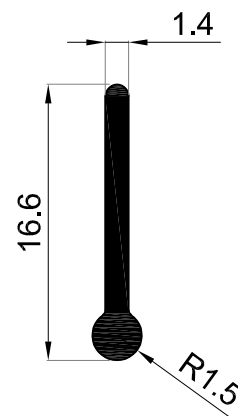

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7010  | 0.070       |


ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM


## COMMON PROFILES - 32

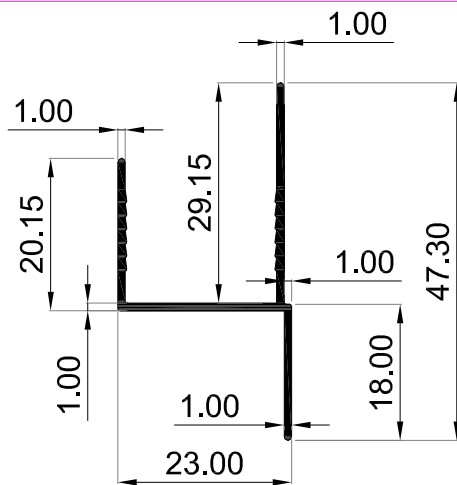


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7065  | 0.247       |

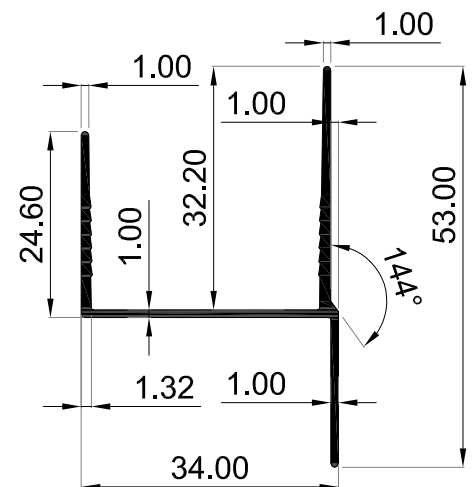


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7067  | 0.337       |

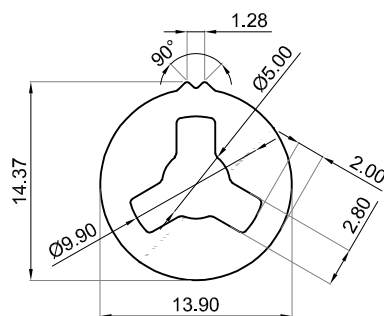


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7066  | 0.305       |

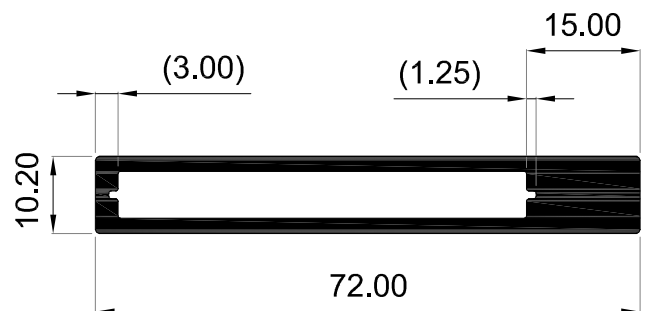

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7187  | 1.086       |

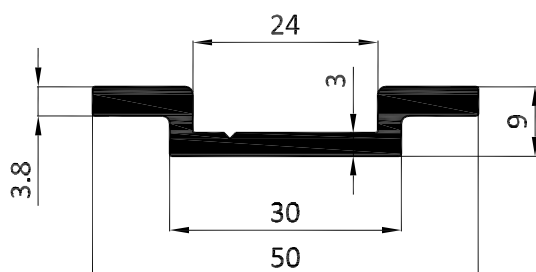

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6919  | 0.551        |

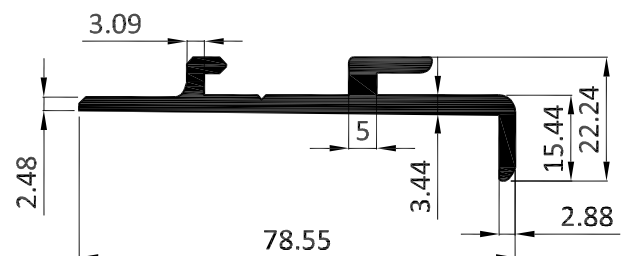

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6918  | 1.000        |


ALL DIMENSIONS ARE IN MM





# KMC ALUMINIUM

## COMMON PROFILES - 33


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6368  | 2.985           |

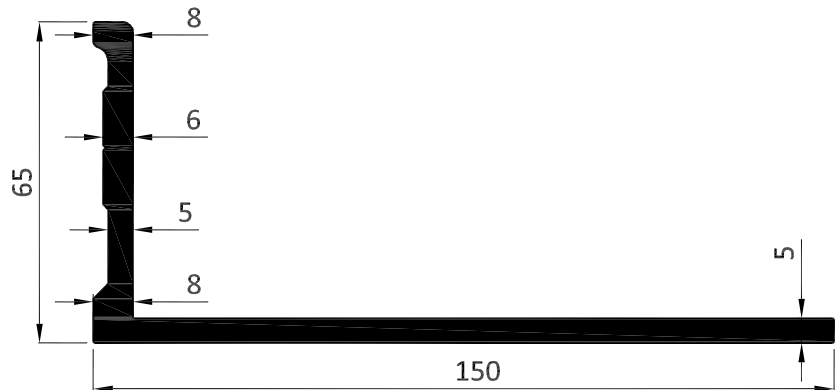

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6381  | 3.946           |

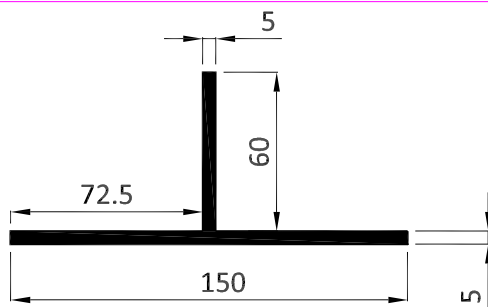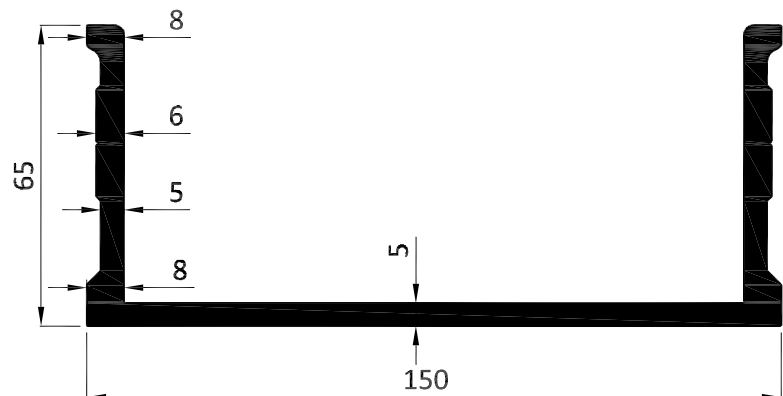


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6682  | 2.846           |

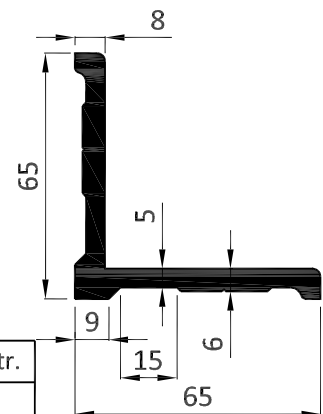

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6683  | 1.973           |


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6747  | 2.906           |

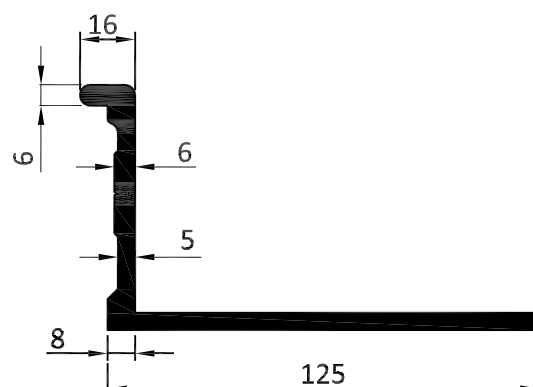


ALL DIMENSIONS ARE IN MM




## COMMON PROFILES - 34

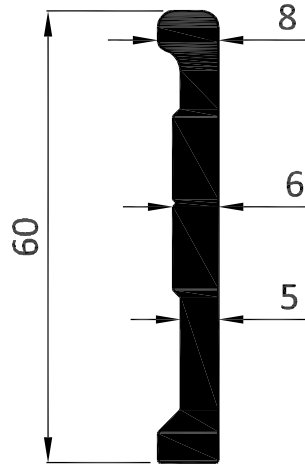

|        |                 |
|--------|-----------------|
| SEC NO | WEIGHT kg /mtr. |
| K6366  | 0.958           |

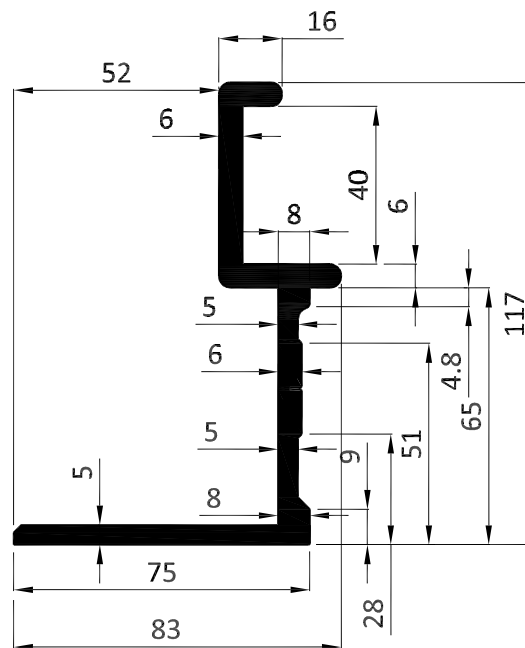

|        |                 |
|--------|-----------------|
| SEC NO | WEIGHT kg /mtr. |
| K6367  | 3.367           |

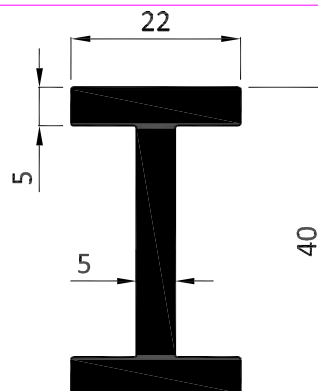


|        |                 |
|--------|-----------------|
| SEC NO | WEIGHT kg /mtr. |
| K6369  | 0.998           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 35

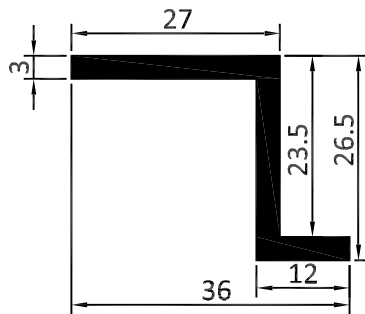


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8735   | 0.482           |

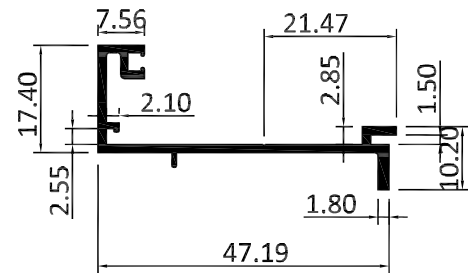


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6019   | 0.945           |

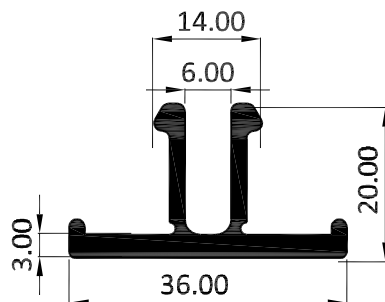


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 5008   | 0.129           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 5009   | 0.175           |

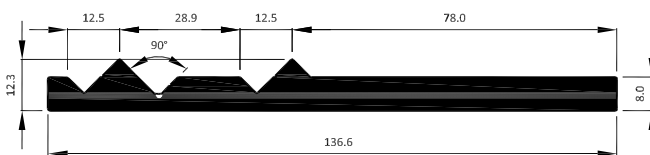


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8636   | 2.910           |

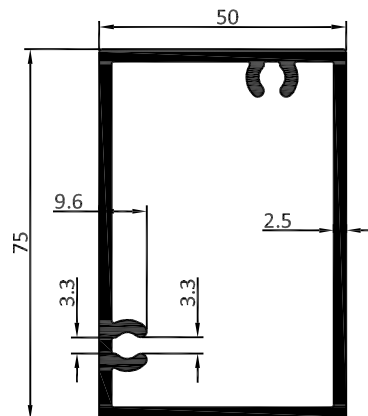

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| 8665    | 1.822        |

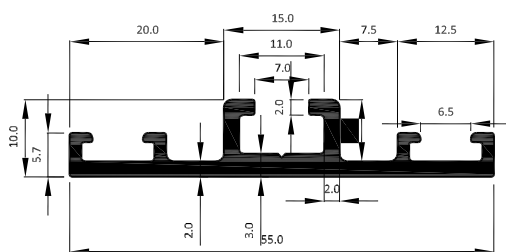

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8638   | 0.513           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8639   | 0.305           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 36

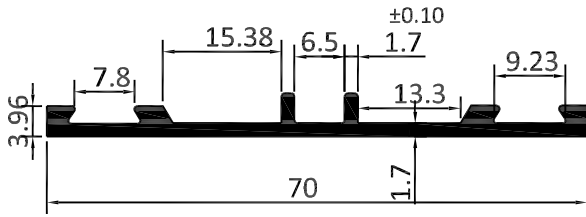


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8019   | 0.442           |

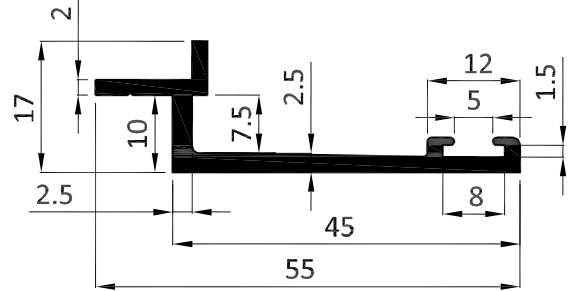


| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| 6020    | 0.456        |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8004   | 1.910-2.170     |

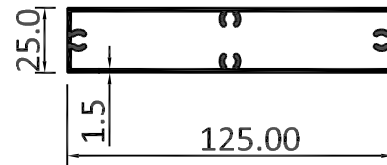


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8037   | 5.000-5.700     |

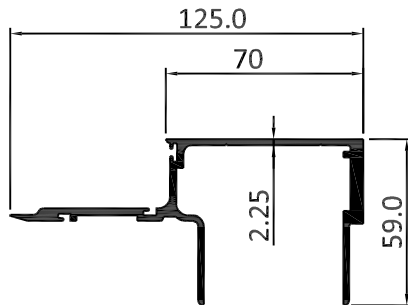

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8001   | 6.050-7.050     |

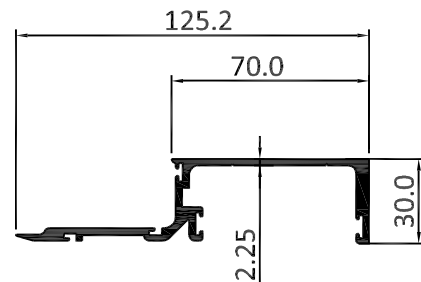

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8002   | 4.800-5.800     |

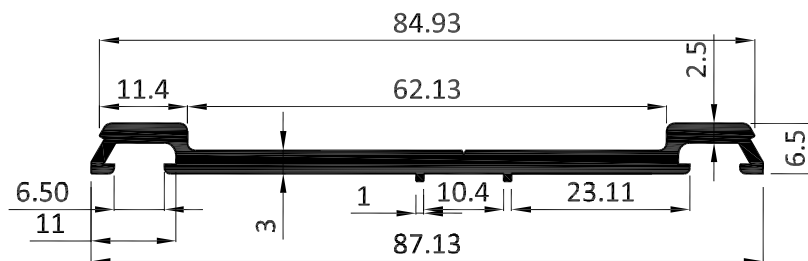


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8021   | 0.742           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 37

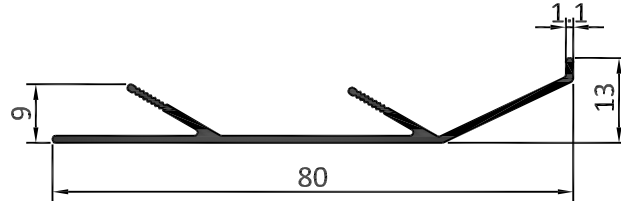


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6213   | 0.333           |

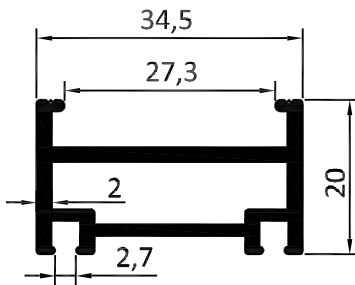


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6591   | 0.551           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6530   | 0.294           |

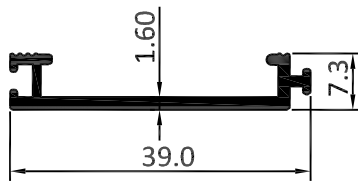


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6531   | 0.234           |

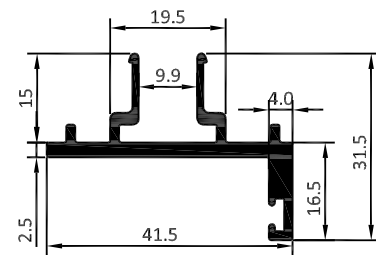

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7255   | 0.555           |

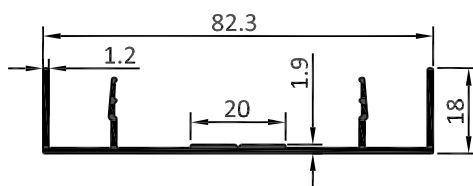

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7256   | 0.500           |

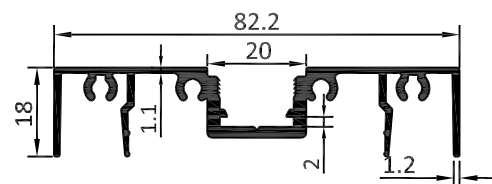


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7257   | 0.883           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 38

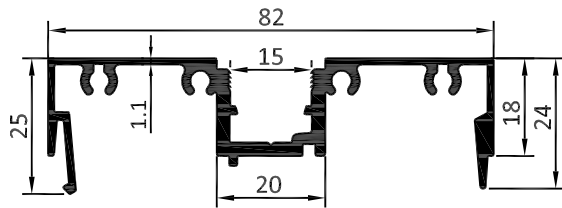


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7258   | 0.948           |

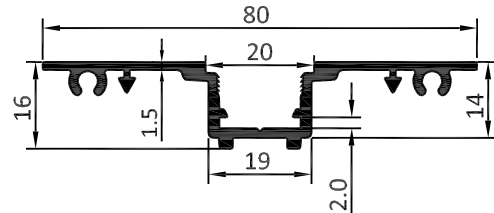


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7259   | 0.644           |

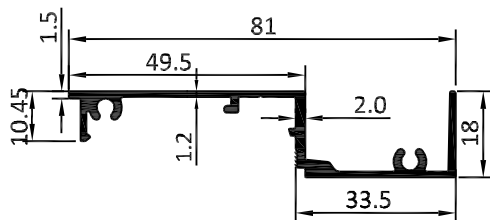


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7260   | 0.592           |

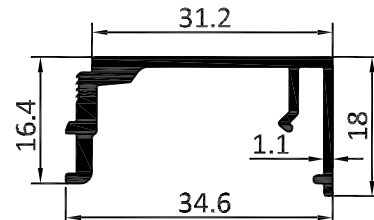


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7261   | 0.317           |

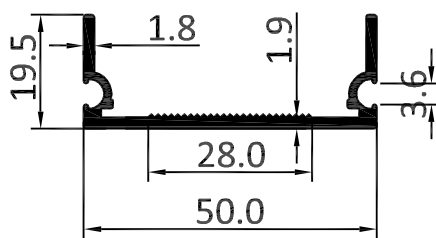


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8193   | 0.469           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8196   | 0.078           |

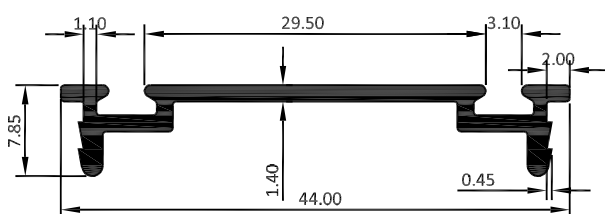

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8197   | 0.251           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7470   | 1.161           |


ALL DIMENSIONS ARE IN MM

EXCLUSIVE




# KMC ALUMINIUM


## COMMON PROFILES - 39




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8198   | 0.240           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8199   | 1.425           |

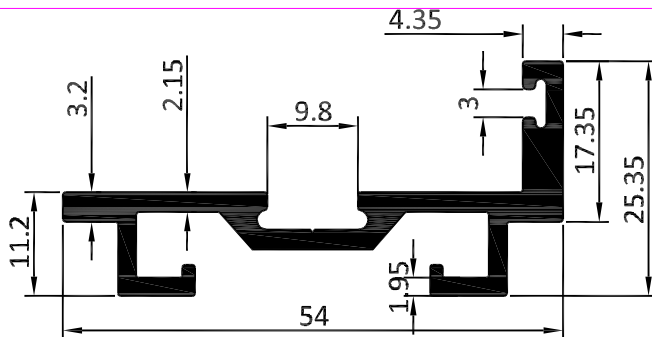

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7471   | 0.721           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8925   | 1.448           |

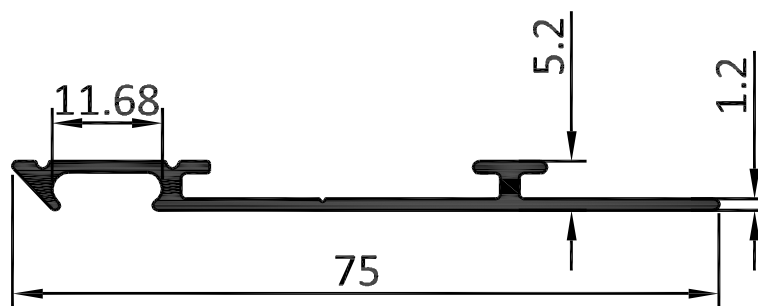

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7179   | 0.339           |


ALL DIMENSIONS ARE IN MM






# KMC ALUMINIUM


## COMMON PROFILES - 40

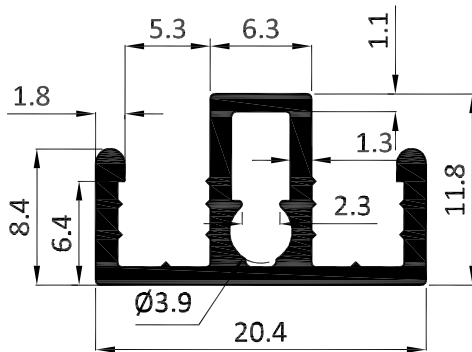


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6569  | 0.212           |

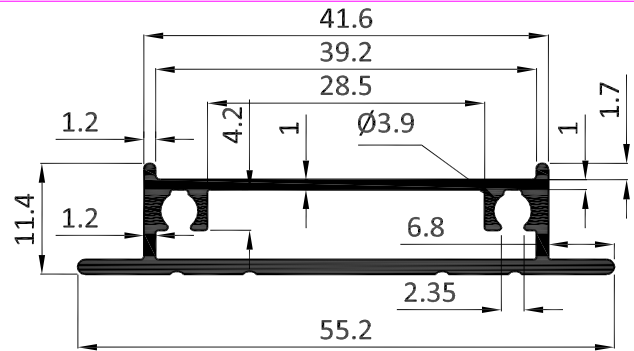


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6570  | 0.442           |

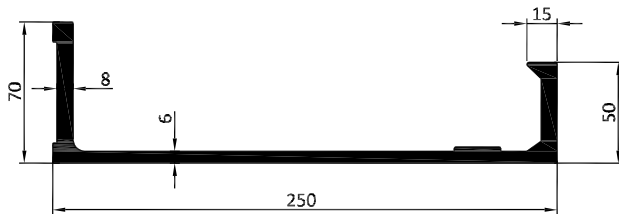


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6607   | 6.738           |

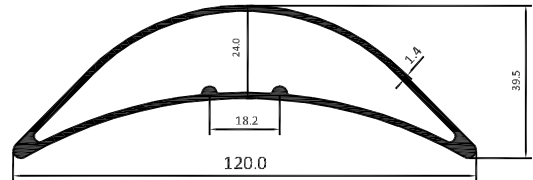


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8378   | 1.110           |

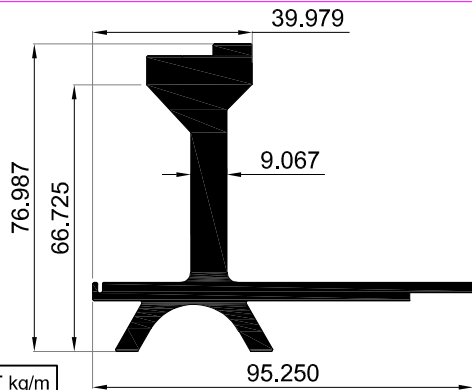


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7060  | 3.663       |

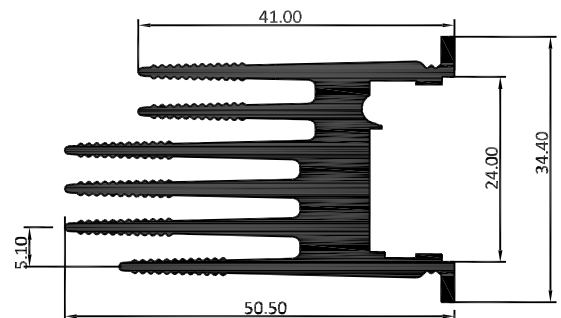

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6647   | 1.576           |

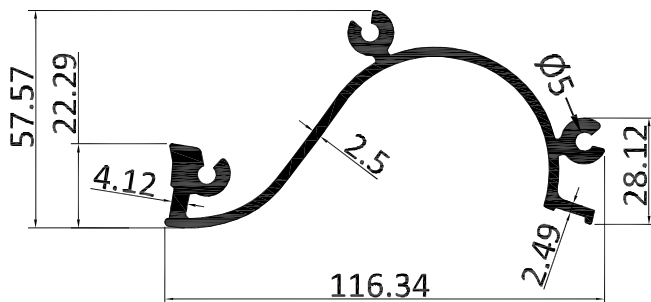

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 8938   | 1.998        |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8939   | 2.580           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 41

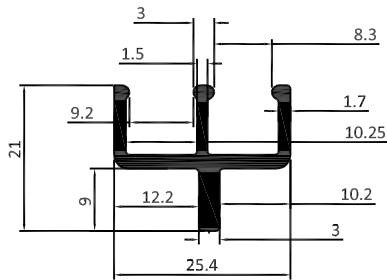


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8886   | 0.350           |

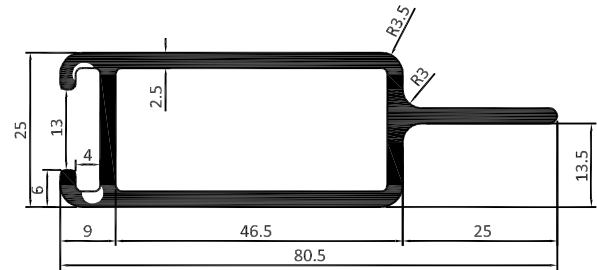


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16059  | 1.217           |

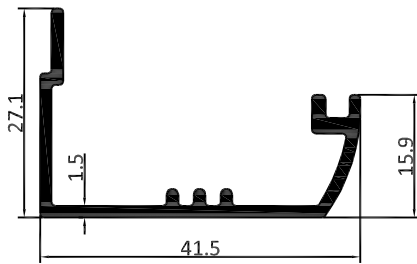


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8782   | 0.386           |

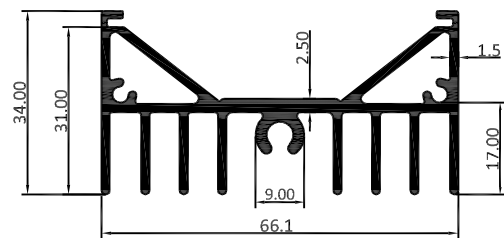


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6643   | 1.332           |

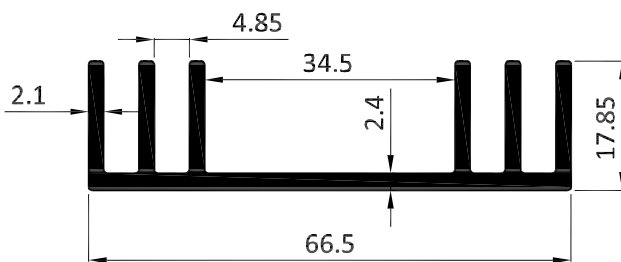

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8602   | 0.955           |

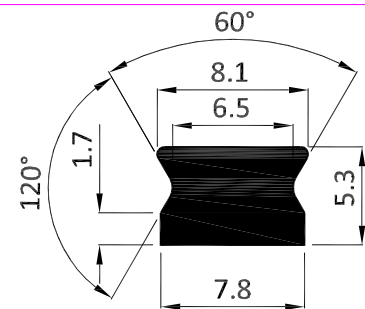

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6599  | 0.106           |

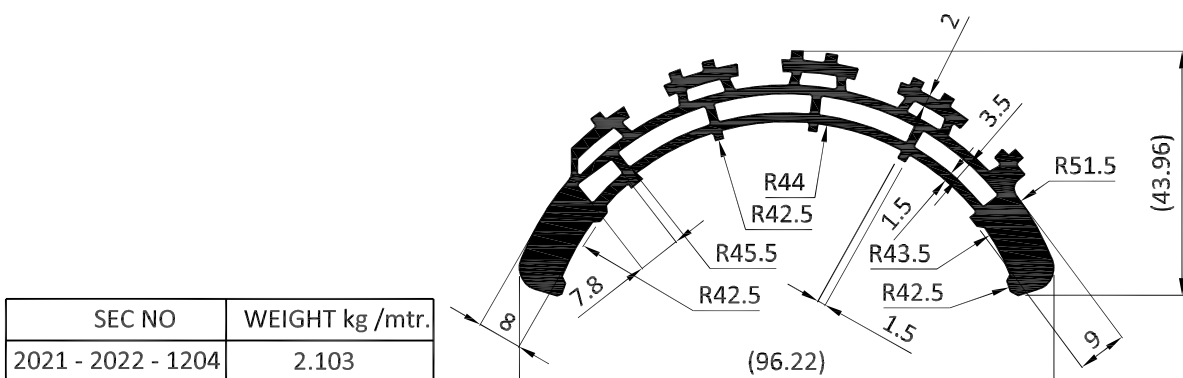


| SEC NO             | WEIGHT kg /mtr. |
|--------------------|-----------------|
| 2021 - 2022 - 1204 | 2.103           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 42




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8896   | 0.258           |

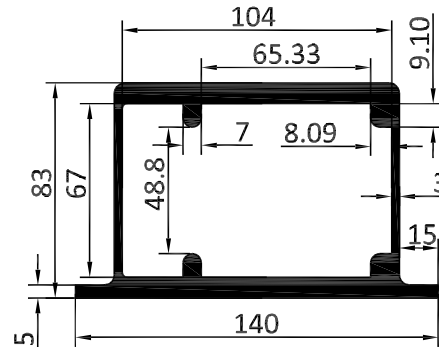


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 8934   | 6.946        |

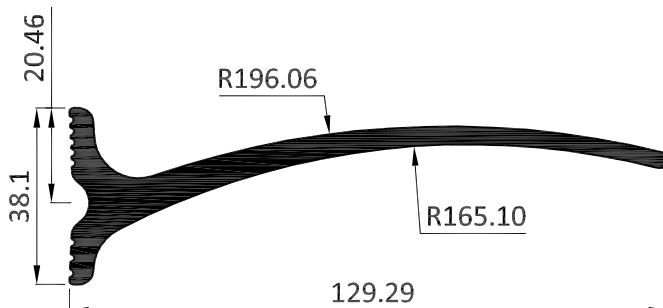


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6587  | 2.259           |

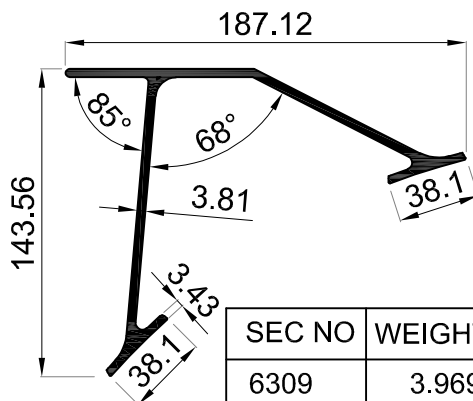


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| 6309   | 3.969       |

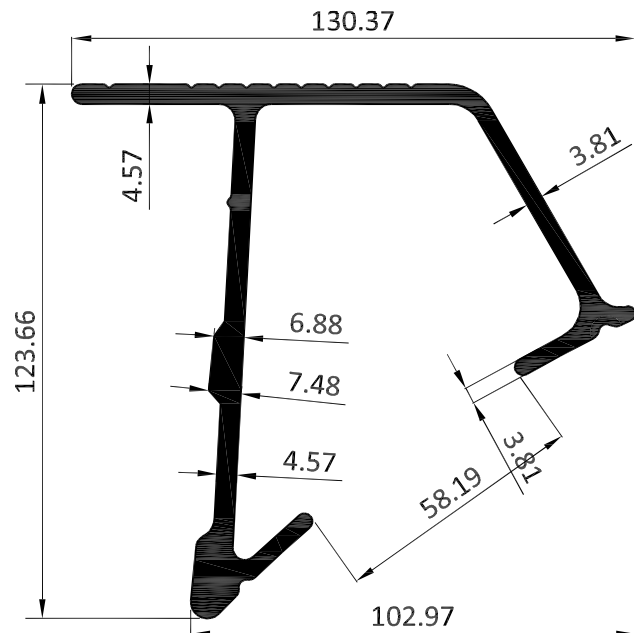

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6586  | 4.137           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 7404   | 1.658           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6589   | 1.696           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 43




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6590   | 1.327           |

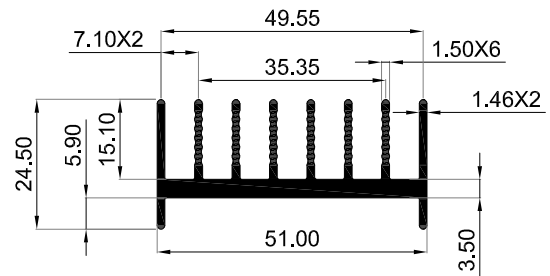


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7050  | 0.986       |

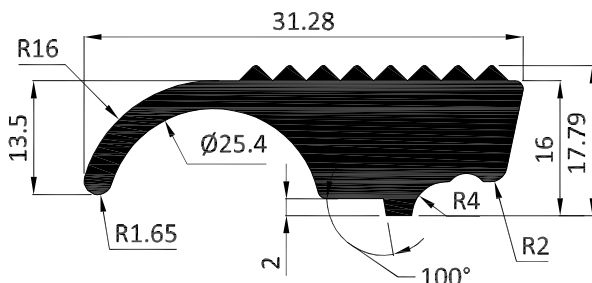


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6567  | 1.292           |

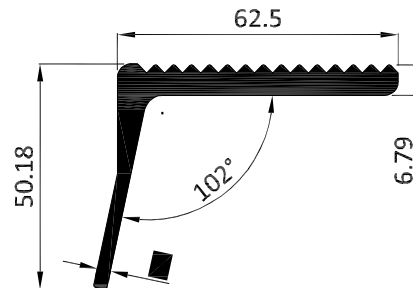


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6565  | 1.465           |

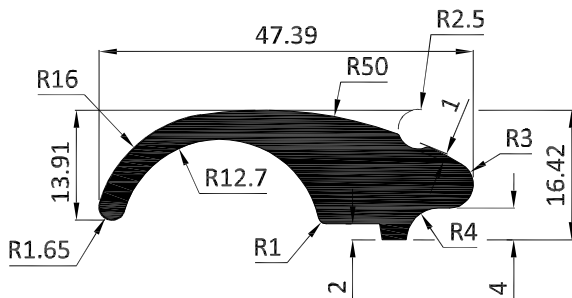


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6566  | 0.936           |

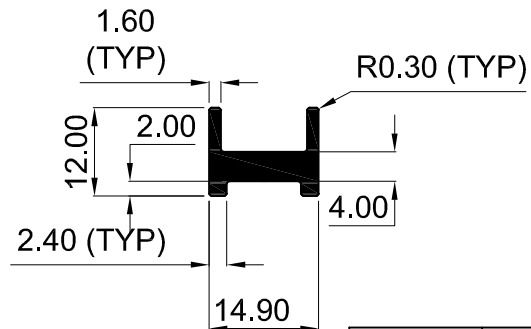

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7687  | 0.238       |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8717   | 0.902           |

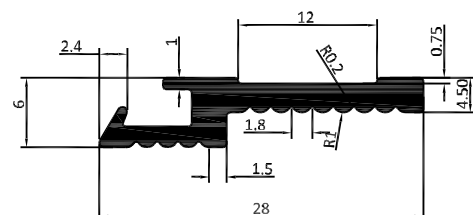


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16012  | 0.207           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 44

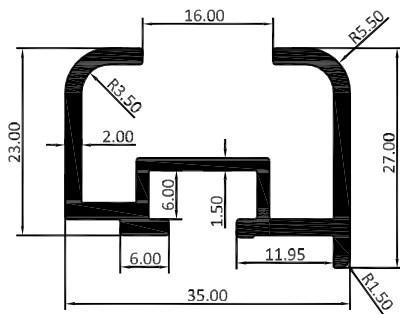


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16013  | 0.567           |

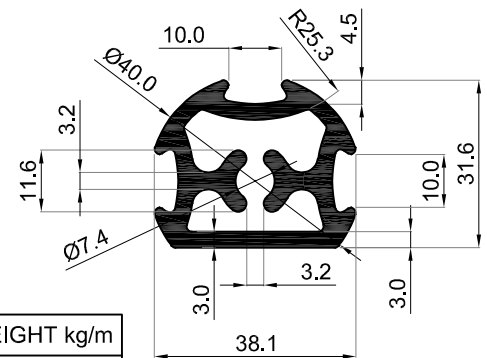


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7134  | 1.406       |

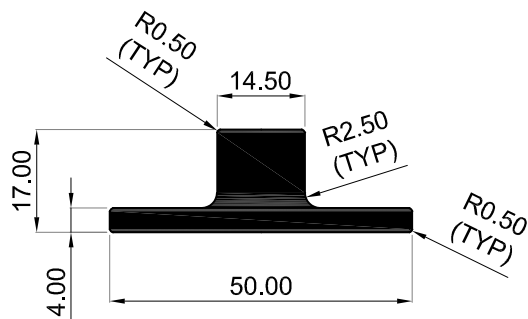


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7105  | 1.071       |




| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 7423   | 0.264        |




| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 7424   | 0.266        |

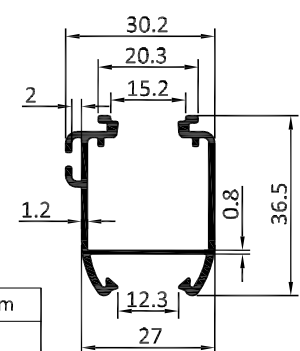

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 7425   | 0.434        |

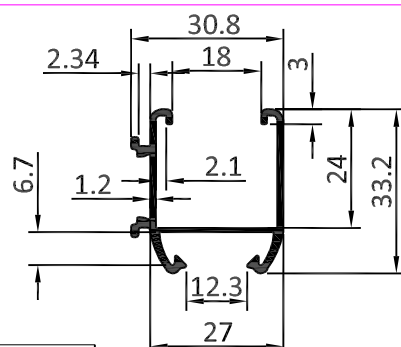

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| 7430   | 0.390        |

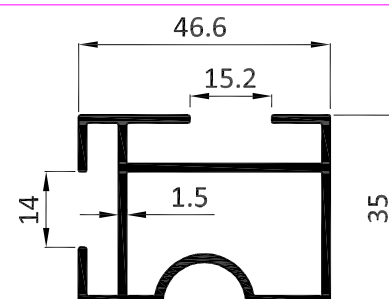

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| K6770  | 0.831         |


ALL DIMENSIONS ARE IN MM





# KMC ALUMINIUM

## COMMON PROFILES - 45

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8600   | 0.379           |


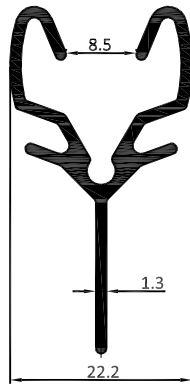


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8601   | 0.548           |

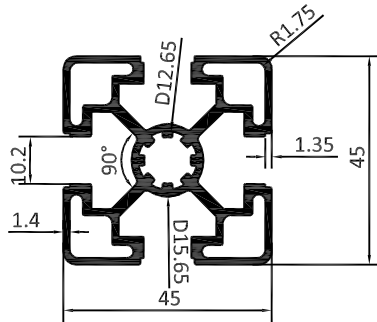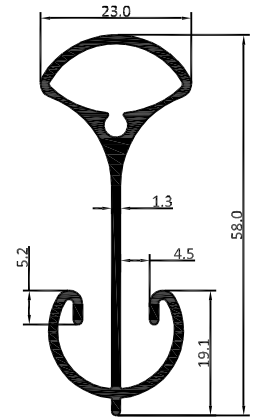



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6970   | 1.494           |

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6821  | 1.28            |

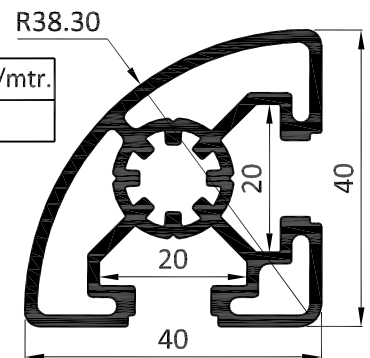


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6736  | 3.533           |

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7209  | 0.175       |

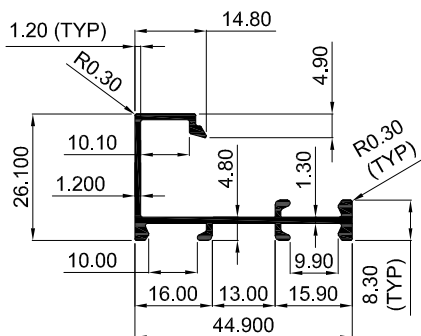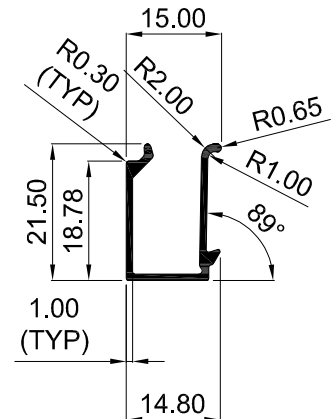

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7208  | 0.414       |

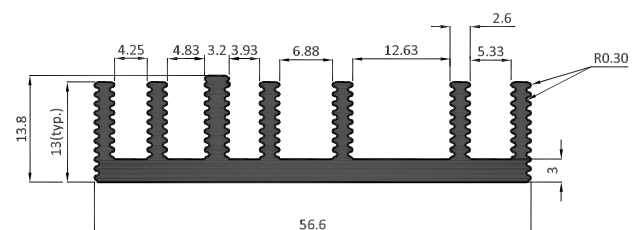


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6964  | 0.860           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 46

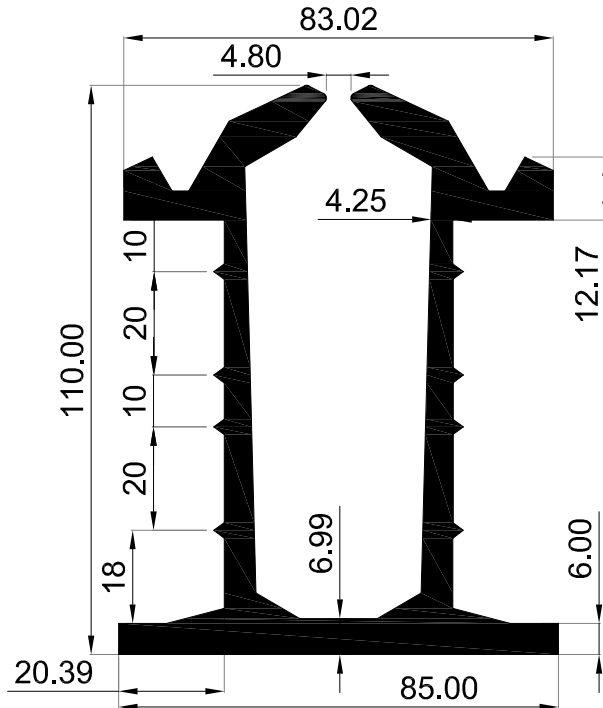


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7085  | 6.172       |

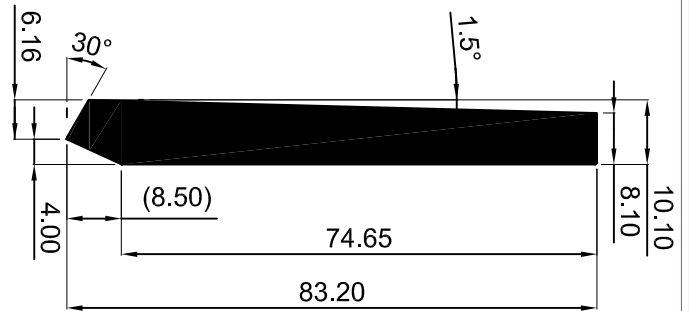


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7123  | 2.009       |

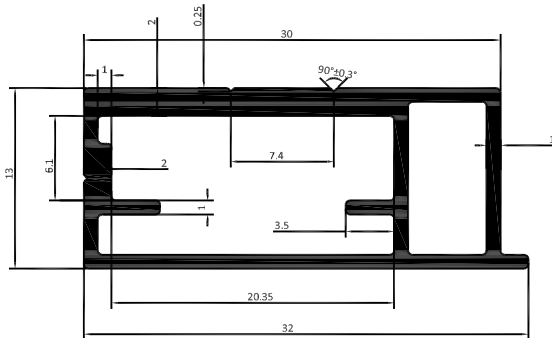


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6431  | 0.349           |

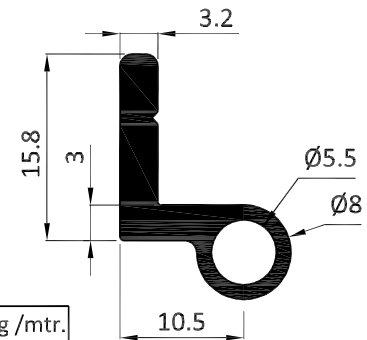

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6464  | 0.244           |

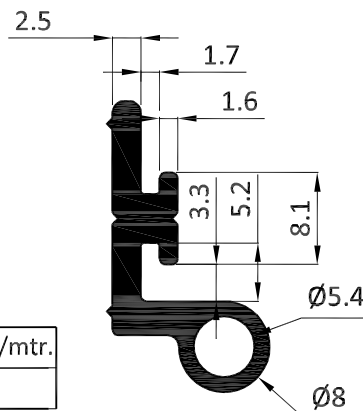

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6465  | 0.305           |

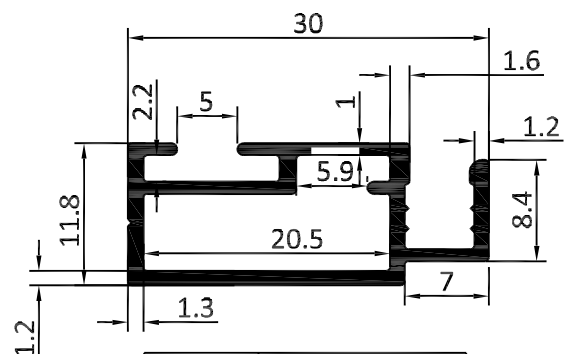


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8971   | 0.284           |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 47

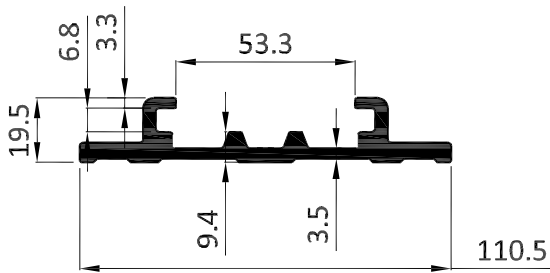


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16039  | 2.034           |

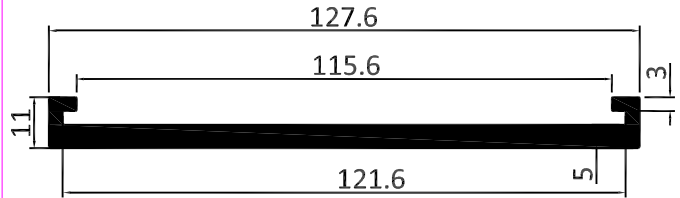


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16037  | 1.686           |

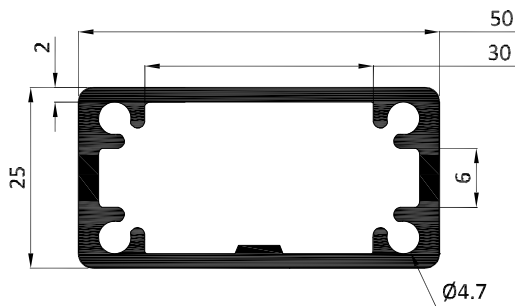


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16038  | 1.130           |

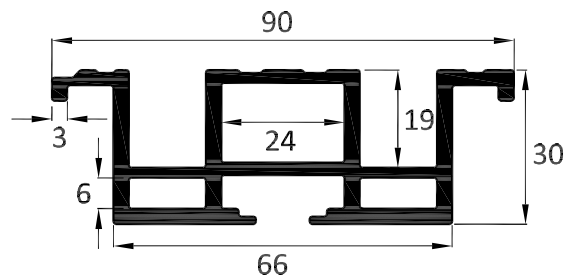


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6338   | 1.986           |

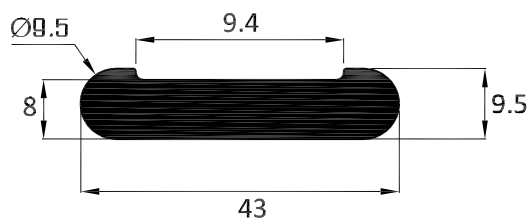


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6339   | 0.937           |

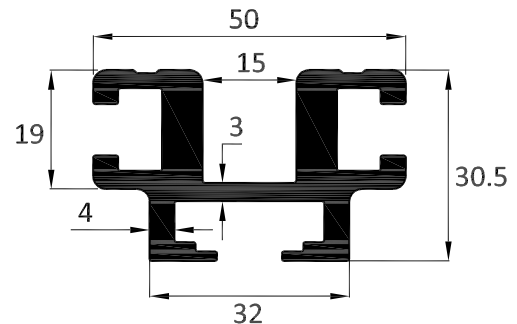

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 6341   | 1.986           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8360   | 1.743           |

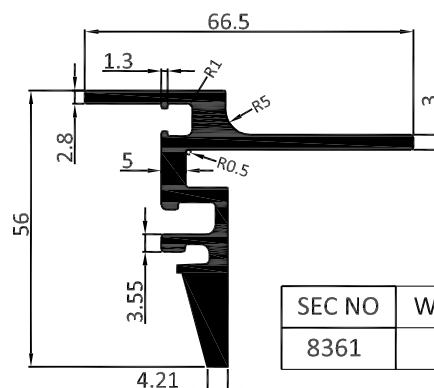

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8361   | 1.559           |

ALL DIMENSIONS ARE IN MM








# KMC ALUMINIUM

## COMMON PROFILES - 48


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8362   | 1.209           |

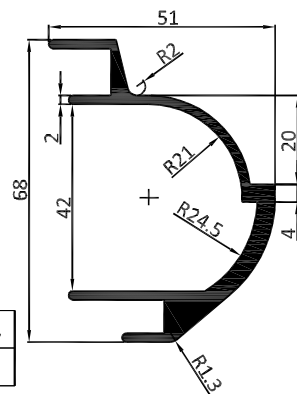


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 1861   | 0.537           |

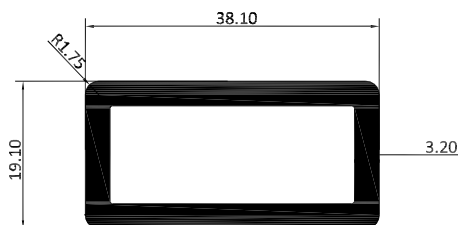


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 1983   | 0.870           |

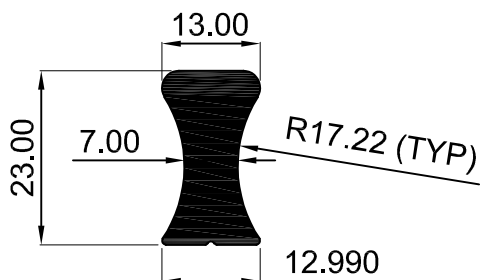


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7497  | 0.585       |

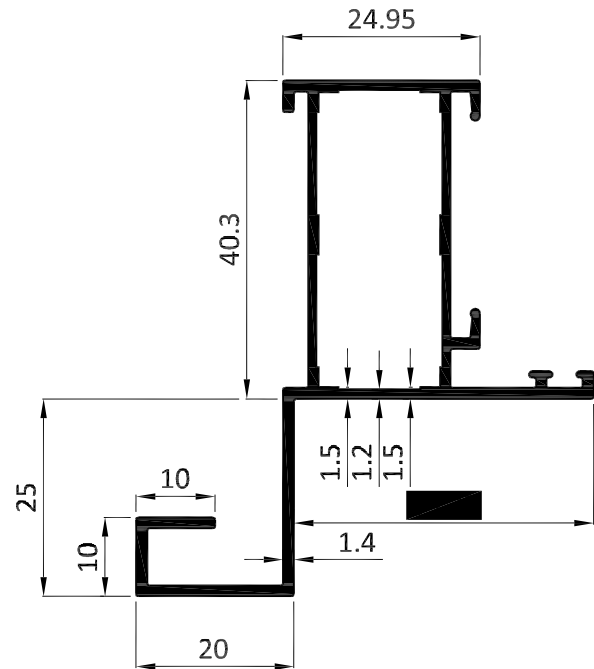

| SEC. NO | WEIGHT(kg/m) |
|---------|--------------|
| K6705   | 0.752        |

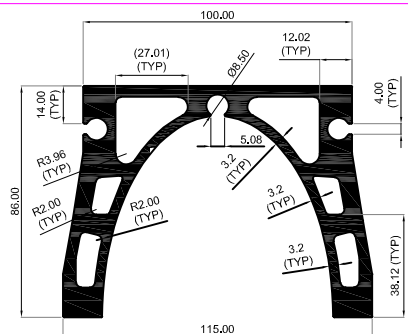

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7216  | 6.9         |

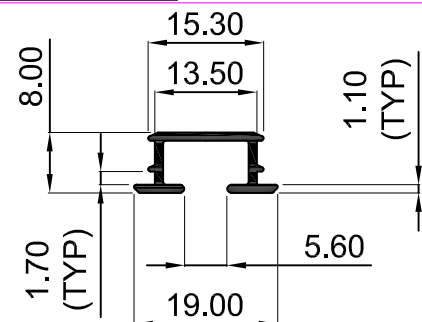


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7498  | 0.118       |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 49

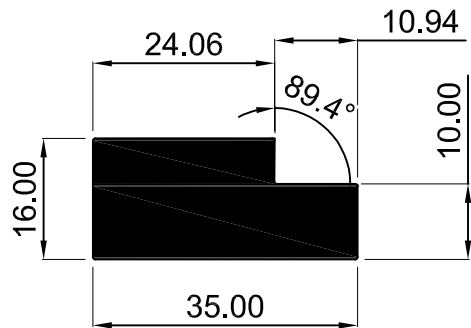


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7291  | 1.353       |

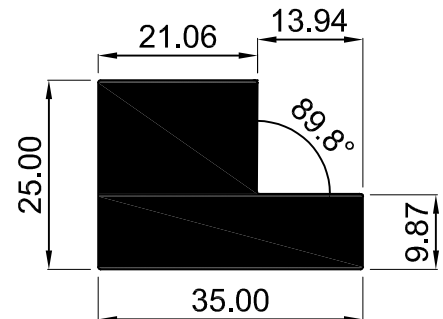


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7292  | 1.823       |

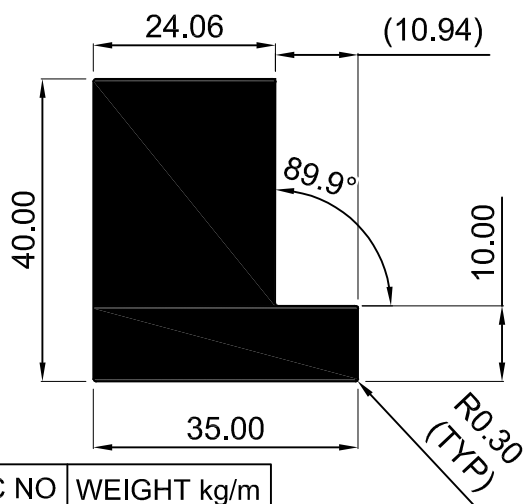

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7293  | 2.934       |

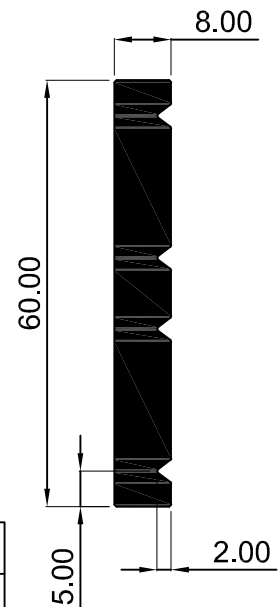

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7122  | 1.275       |

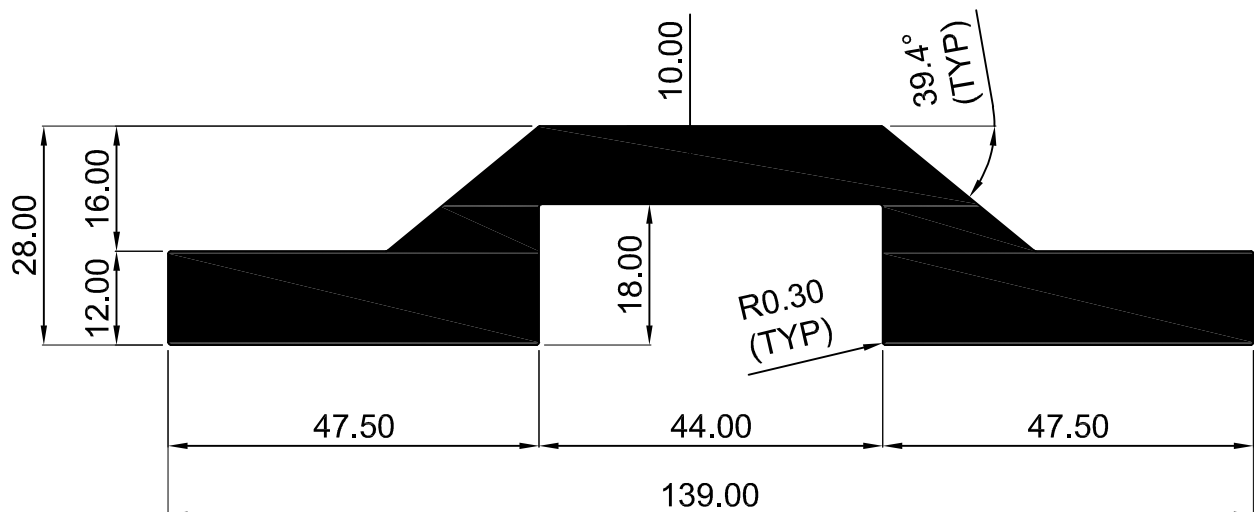

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7120  | 5.184       |

ALL DIMENSIONS ARE IN MM




ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 51

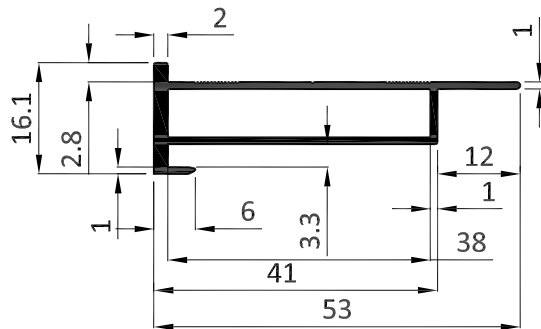


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6630  | 0.357        |

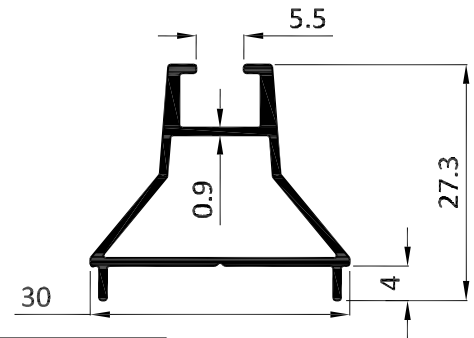


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6933  | 0.283        |

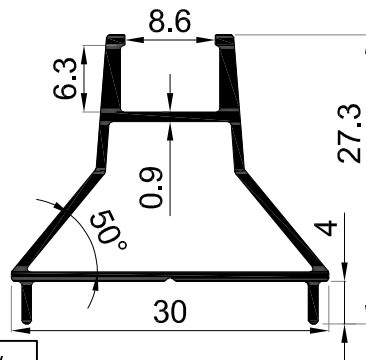

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7093  | 0.276       |

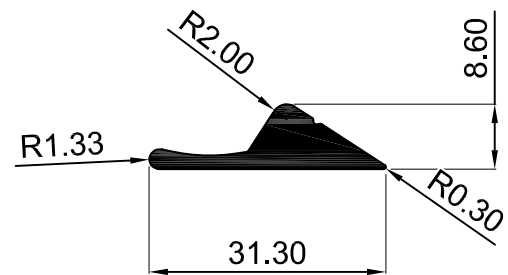

| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7496  | 0.322       |

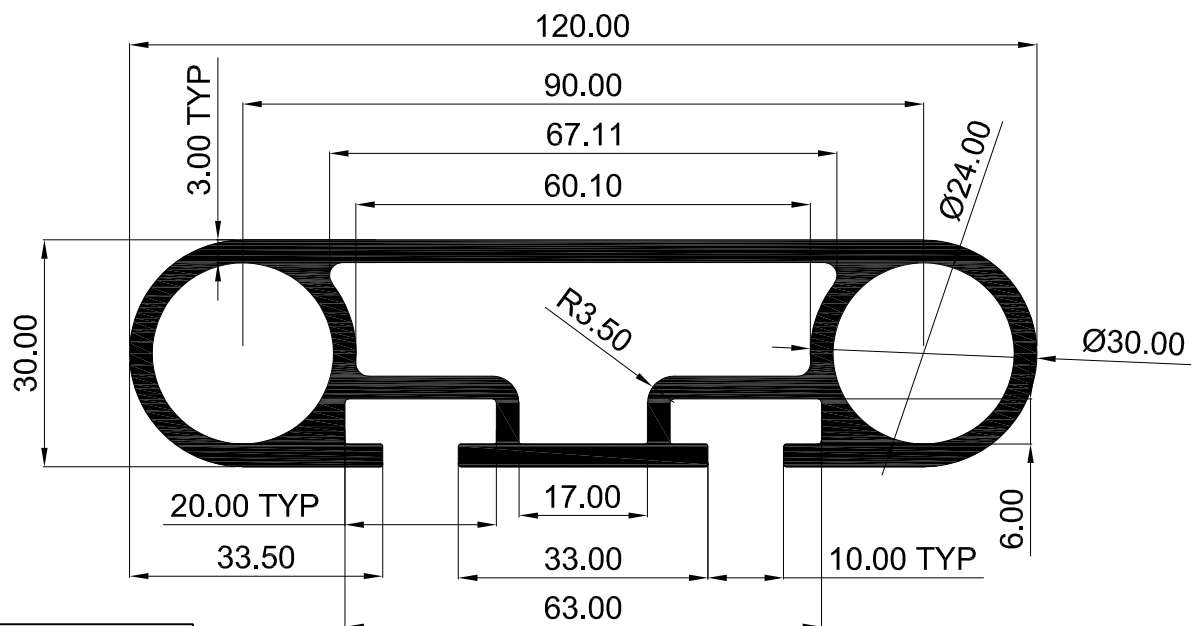


| SEC NO | WEIGHT kg/m |
|--------|-------------|
| K7247  | 3.036       |

ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM


## COMMON PROFILES - 52

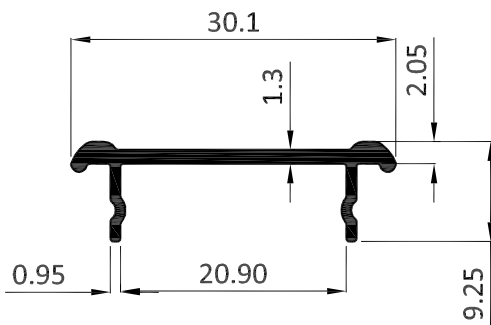


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6934  | 0.157        |

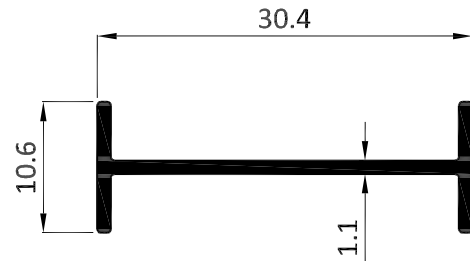


| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6935  | 0.147        |

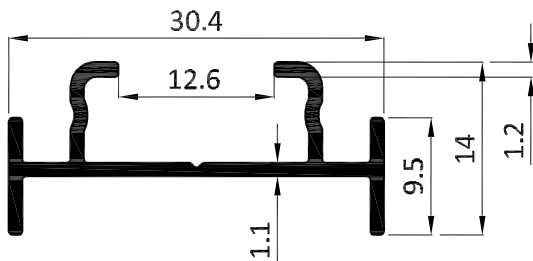

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6936  | 0.204        |

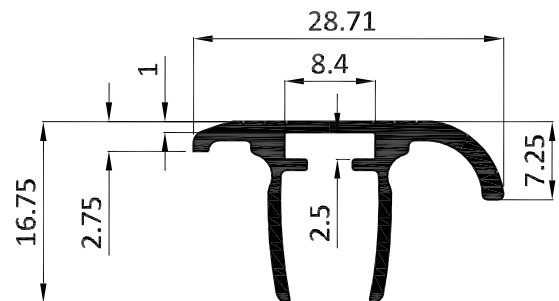

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6937  | 0.246        |

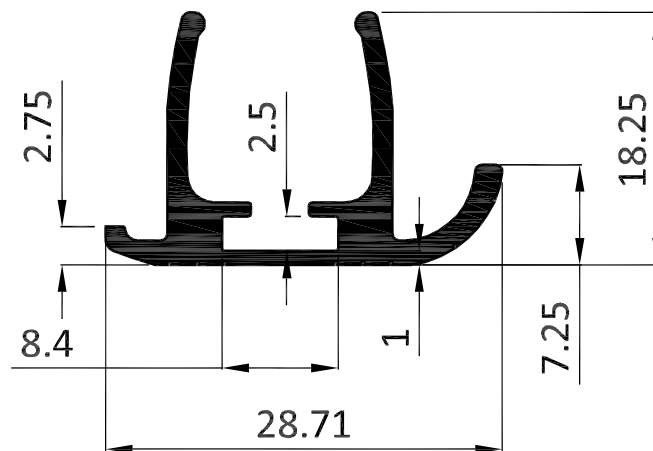

| SEC NO | WEIGHT kg /m |
|--------|--------------|
| K6938  | 0.204        |

ALL DIMENSIONS ARE IN MM



COMMON PROFILES - 53

[illegible]

Technical drawing of a mechanical part. The drawing shows a side view of a component with a total length of 42.83. A fillet with a radius of R1.00 is shown at the end. The width of the part is 5.00. The distance from the left face to the start of the fillet is (37.86). The distance from the start of the fillet to the right face is (4.97). The fillet is defined by a 35° angle.

Technical drawing of a mechanical part with the following dimensions:

- Overall height: 64.01
- Overall width: 114.94
- Top flange width: 15.0
- Top flange thickness: 2.89
- Top flange offset: 6.0
- Web thickness: 3.00
- Web height: 49.40
- Web angle:  $79.3^\circ$
- Bottom flange radius:  $R10.00$
- Web radius:  $R15.00$
- Bottom flange offset: 4.97
- Bottom flange radius:  $R_3$
- Bottom flange width: 12.09
- Bottom flange height: 20.98

|        |             |
|--------|-------------|
| SEC NO | WEIGHT kg/m |
| K7337  | 3.363       |


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

SOLAR


PAGE 28 - I

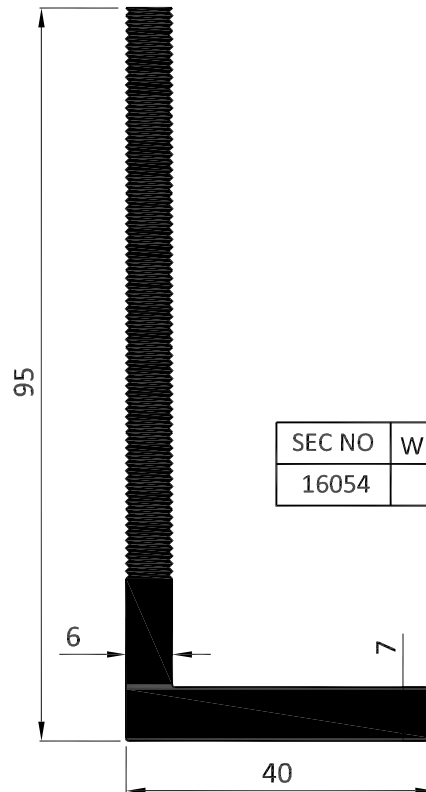

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16054  | 2.081           |

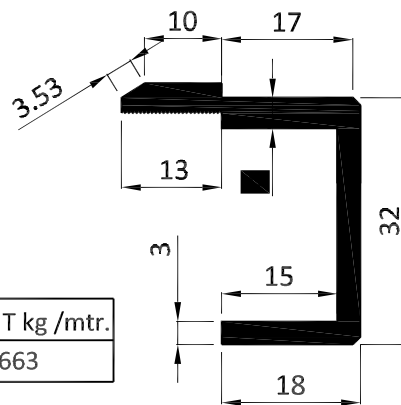

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16051  | 0.663           |

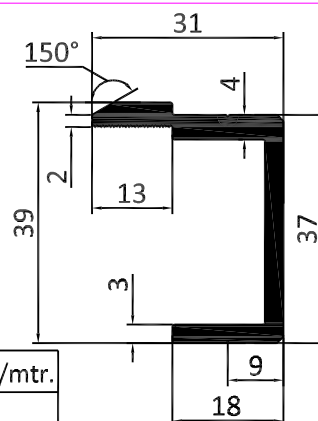

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16023  | 0.706           |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL







# KMC ALUMINIUM

SOLAR


PAGE 28 - II




| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8385   | 2.982 - 3.578 |

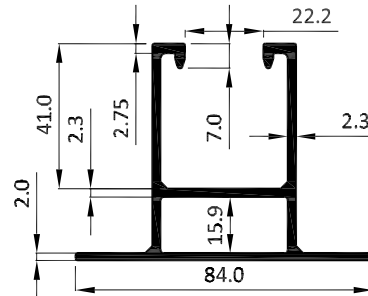


| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8399   | 5.239 - 6.287 |

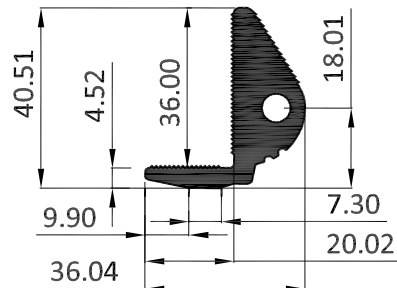


| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8829   | 4.295-5.154  |

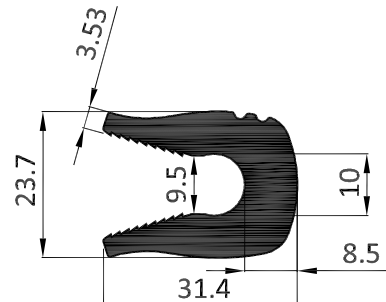

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8828   | 3.739 - 4.569 |

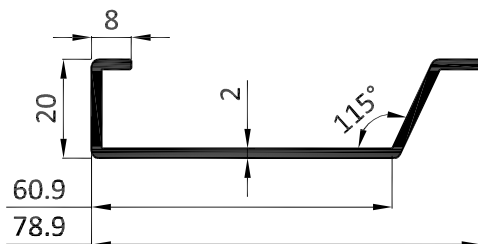

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8887   | 2.022 - 2.472 |

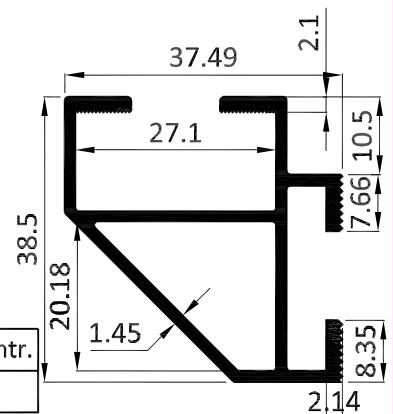

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| K6471  | 0.660           |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

SOLAR


PAGE 28 - III

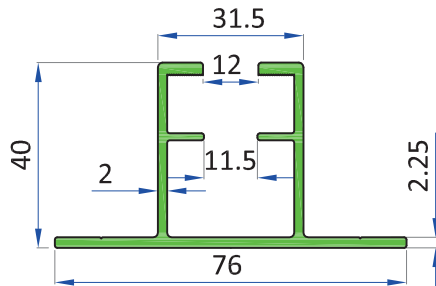


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16034  | 1.044           |

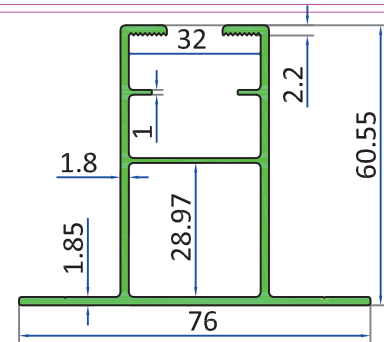


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16024  | 1.144           |

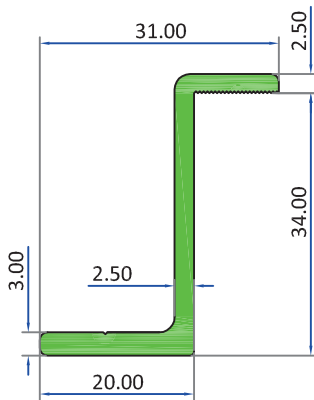


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16035  | 0.456           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16029  | 1.736           |

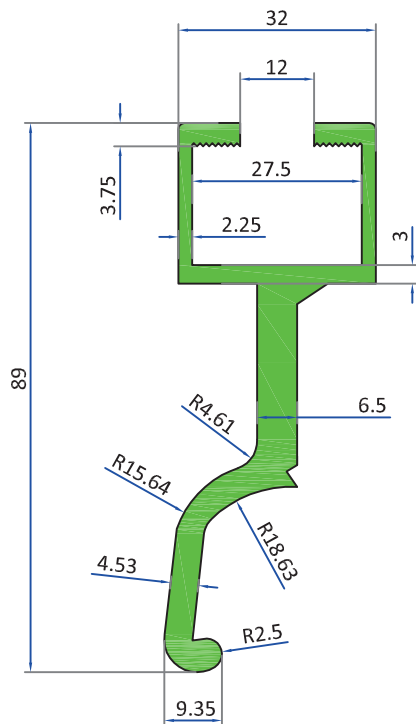

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16053  | 1.787           |

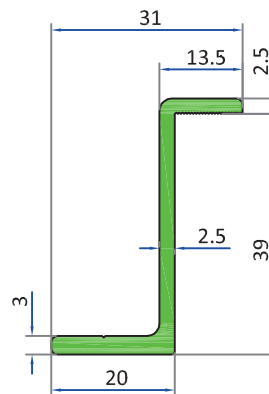

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 16052  | 0.490        |

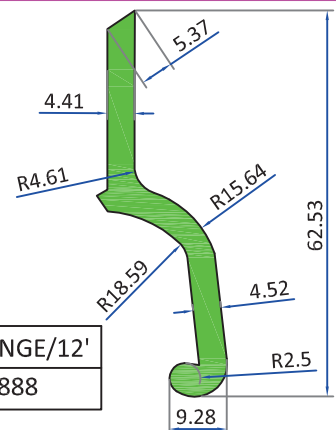

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 16057  | 0.888        |

ALL DIMENSIONS ARE IN MM

COMMERCIAL

COMMERCIAL




# KMC ALUMINIUM



SOLAR

PAGE 28 - IV


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16056  | 0.855           |

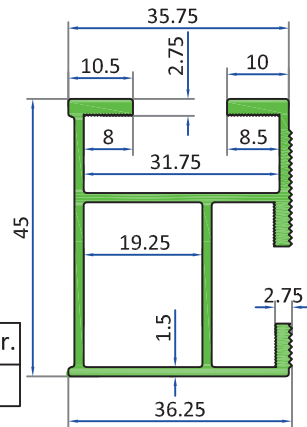


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16026  | 0.887           |

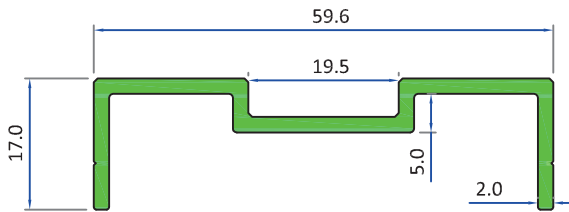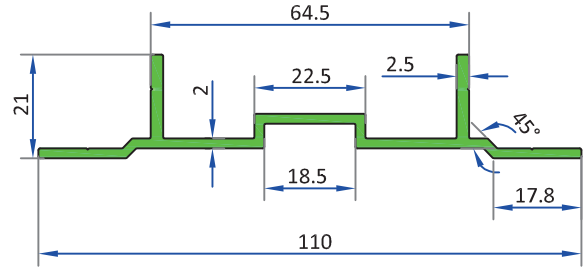


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16027  | 0.536           |

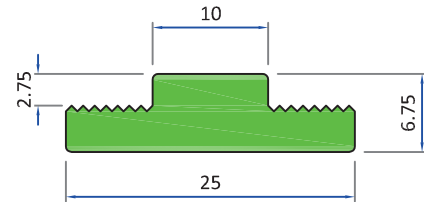


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16028  | 0.333           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 16055  | 0.392           |

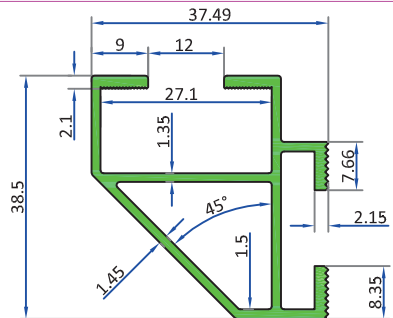

| SEC NO | WT/RANGE/12' |
|--------|--------------|
| K6471  | 0.660        |

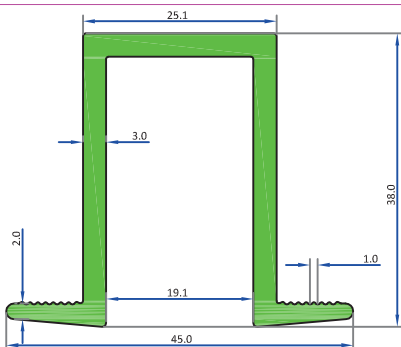

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8313   | 0.897           |

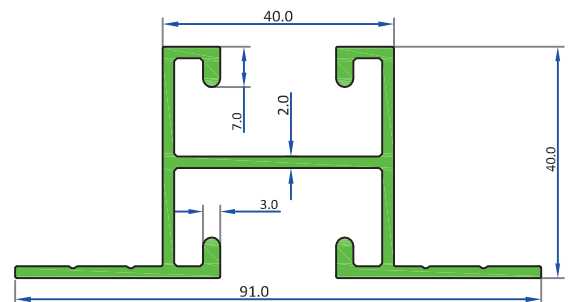


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8301   | 1.226           |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

SOLAR


PAGE 28 - V

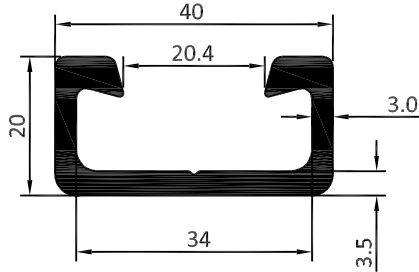


| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8148   | 0.809           |




| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8176   | 0.651           |



| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8187   | 0.540           |

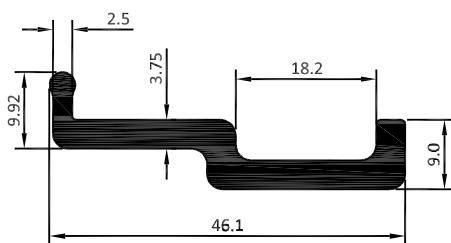

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8388   | 0.610           |

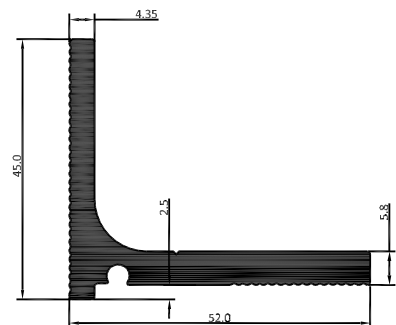

| SEC NO | WEIGHT kg /mtr. |
|--------|-----------------|
| 8389   | 1.265           |

ALL DIMENSIONS ARE IN MM

COMMERCIAL


COMMERCIAL




# KMC ALUMINIUM

SOLAR


PAGE 28 - VI

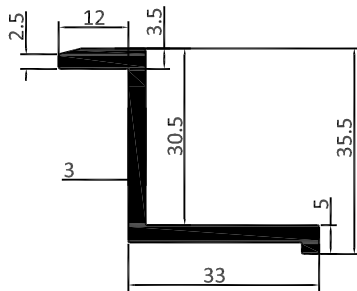


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8982   | 0.638         |

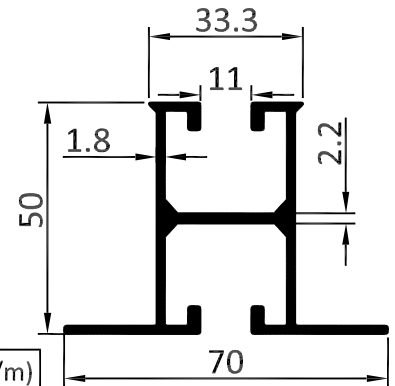


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8143   | 1.163         |

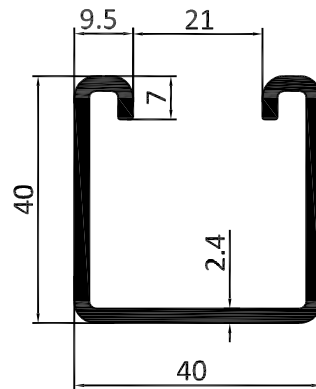


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8859   | 0.859         |



| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8860   | 2.333         |

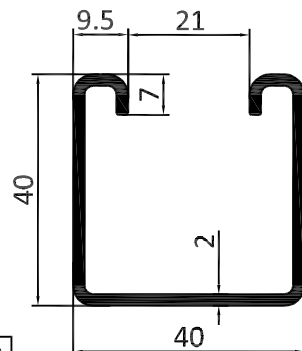

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8964   | 0.726         |

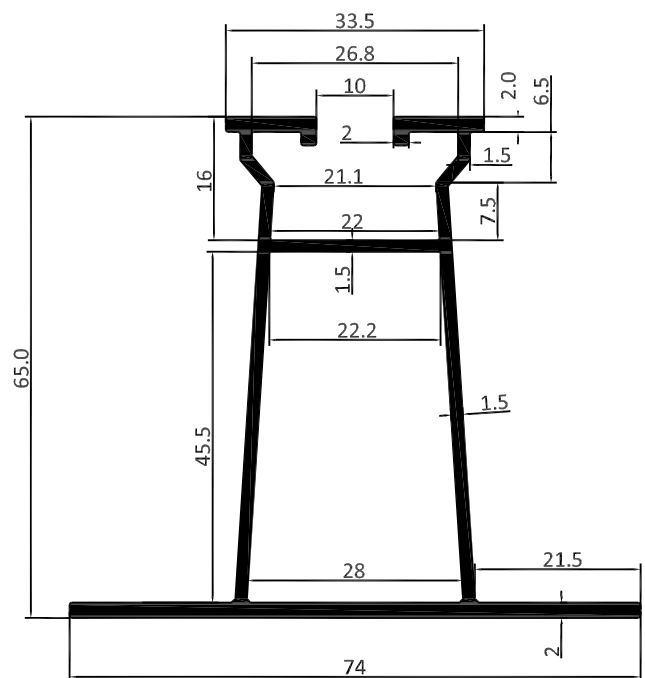

| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| 8983   | 1.139         |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

SOLAR


PAGE 28 - VII

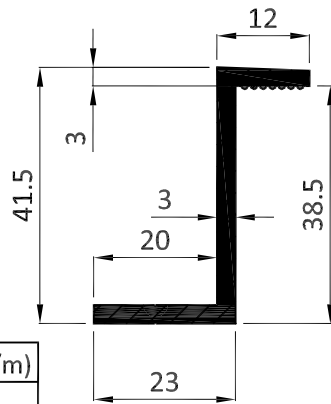


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| K6805  | 0.595         |

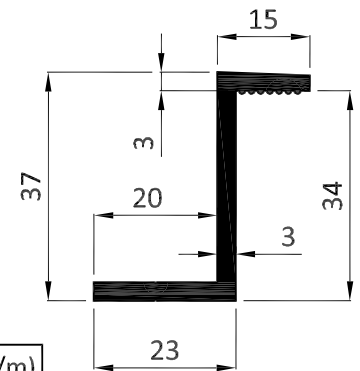


| SEC NO | WEIGHT (kg/m) |
|--------|---------------|
| K6806  | 0.558         |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7405   | 3.180 - 3.540 |



| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7422   | 2.060 - 2.470 |

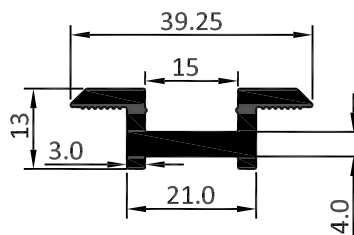

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 7421   | 1.670 - 2.000 |

COMMERCIAL

COMMERCIAL


ALL DIMENSIONS ARE IN MM




# KMC ALUMINIUM

SOLAR


PAGE 28 - VIII




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8788   | 4.282-5.138  |




| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8789   | 3.191-3.830  |



| SEC NO | WT/RANGE/12' |
|--------|--------------|
| 8790   | 4.802-5.763  |

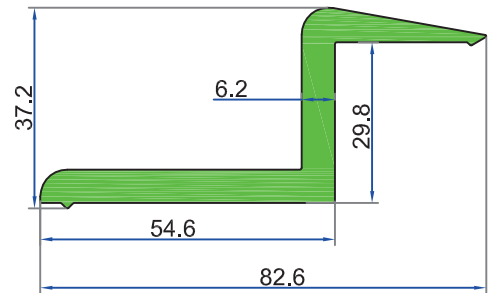

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8953   | 5.520 - 6.624 |

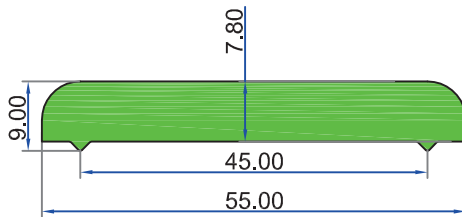

| SEC NO | WT/RANGE/12'  |
|--------|---------------|
| 8954   | 3.751 - 4.502 |

COMMERCIAL

COMMERCIAL

ALL DIMENSIONS ARE IN MM